

Vacuum Pad Flat Type/Flat Large Suction Flow Type

Vacuum pad for thin work-pieces, such as sheets or vinyl that are easily deformed and wrinkled.

⚠ Safety instructions for this product
Safety instructions, Common safety instructions for each product category and Detailed safety instructions for each product are in the end of this catalog and our website.

Model Designation (Example)

VP (1)	C (2)	10 (3)	-6 (4)	F (5)	N (6)	-ER (7)	-6J (8)	-DC (9)	-ECV (10)	-FH (11)	-F15 (12)	(13)
						Optional	Optional	Optional	Optional	Optional	Optional	

(1) Vacuum Pad

(2) Holder type

Holder type		Fixed type		Spring type				Holder type		Lightweight	Low profile
		Mini	Standard	Mini	Standard	No cover	Low dust emission			Spring type	Direct mount
Code	Top port	MA	A	MC	C	OC	LFC	Code	Top port	HC	-
	Side port	MB	B	MD	D	OD	LFD		Side port	HD	HE
	Direct mount	-	E	-	F	-	-		Dual side port	HDW	HEW
Connection config. code		M4	M6	M4	M6	M4	M6	M4	M6	M4	M6

(3) Pad dia.

Code	10	15	20	25	30
Pad dia. (mm)	ø10	ø15	ø20	ø25	ø30
Connection config. code	M4			M6	

(4) Stroke (No code entry for Holder type: MA, A, MB, B, E, F, HE and HEW)

Code	-2	-4	-5	-6	-10	-15	-20	-25	-30	-40	-50
Stroke (mm)	2	4	5	6	10	15	20	25	30	40	50
Spring type holder code	VPMA										
	VPC										
	VPOC										
	VPLFC										
	VPMD										
	VPD										
	VPOD										
	VPLFD										
	VPHC										
	VPHD										
	VPHDW										

(5) Pad type

Code	F	FH
Pad type	Flat	Flat, Large Suction Flow

(6) Pad material

Code	N	S	U (*)	F	SE	NE
Rubber material	Nitrile	Silicone	Urethane	Fluoro	Conductive Silicone	Conductive NBR (Low resistance)

*1. The Conductive Silicone rubber (SE) is a silicon rubber capable of releasing static electricity. (Volume resistance: More than 200 Ω · cm and 10¹⁰ Ω · cm or less)
*2. Nitrile rubber (N) and Conductive NBR (Low resistance, Volume resistance: 200 Ω · cm or less) (NE) are not suitable for use with ozone environment.
*3. Large Suction Flow type is not available on Urethane rubber (U).

(7) Pad surface treatment for suction mark-free Optional

Code	No code	-DL	-ER	-FG
Surface treatment	None	DLC. coating	Reformed surface	Fluoro-coating
Applicable pad material	—	Silicone (S), Fluoro (F), Conductive Silicone (SE)	Nitrile (N), Conductive NBR (Low resistance) (NE)	Silicone (S), Conductive Silicone (SE)
Applicable pad dia.	—	All sizes	All sizes	All sizes

* Please refer to page 370 for the details of each pad surface type and treatment for Suction Mark-free.

(8) Vacuum port size and joint type (No code entry for Holder type: F) (○: Available)

Type	Push-in fitting						Barb fitting			Female thread	
	mm size (mm)						inch size (inch)			Metric thread	
Code	-180J	-2J	-3J	-4J	-6J	-1/8J	-5/32J	-1/4J	-3B	-4B*	-6B
Tube O.D.	ø1.8	ø2	ø3	ø4	ø6	ø1/8	ø5/32	ø1/4	ø2	ø2.5	ø4
Tube I.D.										Polyurethane tubes 0.163 Nylon tubes 0.180	
Thread size										M5×0.8 M6×1	
Holder type	VPMA										
	VPA										
	VPMB										
	VPB										
	VPMB										
	VPC										
	VPOC										
	VPLFC										
	VPMD										
	VPD										
	VPOD										
	VPLFD										
	VPHC										
	VPHD										
	VPHDW										
	VPHE										
	VPHEW										

* The barb fitting of 5/32" size is common with 4 mm size. Please order with the code: -4B.
* Available port size varies depending on pad dia. See model code lists on the following pages.

Type	Metric thread				Taper pipe thread				Parallel pipe thread				NPT thread				Female thread	
	-M8	-M10	-M12	-M14	-R1	-R2	-R3	-R4	-G1	-G2	-G3	-G4	-N1	-N2	-N3	-N4	Metric thread	
Thread size	M8×1.25	M10×1.5	M12×1.75	M14×2	R1/8	R1/4	R3/8	R1/2	G1/8	G1/4	G3/8	G1/2	NPT1/8	NPT1/4	NPT3/8	NPT1/2	M5×0.8	M8×1.25
Holder type VPE																		

* Configuration code: M4 is not available for R4 and G4 thread size.

(9) Dust Catcher (Holder type: C, D, and F only) Optional

Code	No code	-DC
Dust Catcher	None	Installed

* Note that the holder stroke becomes shorter when a dust catcher is installed. Please visit our website for details.

(9) Spring load (Holder type: LFC only)

Code	No code	-SF1/4
Load	Standard load	Low load (1/4 of standard load)

** -SF1/4 is not selectable when 2 mm stroke is selected.

(10) Fall Prevention Valve Optional

Code	No code	-ECV
Fall Prevention Valve	None	Installed

* -S3 spec. is not selectable when Fall Prevention Valve is selected.

(11) Swivel Joint for vacuum pad Optional

Code	No code	-FH	-FHH	-CFH
Option	None	Ball Swivel Joint (Swivel angle: 30°)	Ball Swivel Joint (Swivel angle: 15°)	Flexible Swing Joint (Swing angle: 8°)

* -S3 spec. is not selectable when Ball Swivel Joint is selected.

(12) Filter Optional

Code	No code	-F15	-F30
Filter	None	Installed (Filter area 1.7 cm ²)	Installed (Filter area 7 cm ²)
Applicable config. code	—	M4, M6	M6

*1. -S3 spec. is not selectable when Filter is selected.

*2. "-F30" is recommended when much dust is expected at sucking work pieces.

(13) -S3 spec. Optional

Code	No code	-S3
Metal material	Standard	No copper-based metallic materials used in flow paths.
Seal rubber material	Standard	HNBR or FKM
Release ring color	Black	Dark blue

*1. -S3 spec. is not available for the following fittings and holders:

- Push-in fitting with dia. size of 1.8, 2, 3 mm and inch sizes except dia. 1/8" (some) and 5/32".
- Barb fitting with dia. of 1/4".
- Pad holder with stroke length 10 mm or longer (except for VPHC holders).
- VPLFC and VPLFD holders.

*2. For inch size push-in fitting, the release ring color is white even for "-S3 spec."




Vacuum Pad Flat Type/Flat Large Suction Flow Type

Characteristics

Suitable for thin work-pieces such as sheets or vinyl.

Groove on a flat pad reduces deformation and wrinkle on a work-piece.



Thin work-piece such as sheet or plastic bag

Pad dia. 5 types
ø10 to ø30mm

Pad material 6 types

* Only 5 types for Large Suction Flow type


Surface treatment 3 types

Silicone (S) is Food Sanitation Act compliant. (Holder is not compliant. Vacuum pad complies only at work-piece contact area.) * See page 6 for the details of the Food Sanitation Act.

Wide variations of Pad holders.

The following combinations of holder and pad rubber are also available although they are not listed on the model code list from the next page onward. Contact us for the details.

- Lightweight VPHC holder that is made of resin and aluminum.
- Lightweight VPHD and VPHDW holders with spring type without cover.
- VPHE and VPHEW holders with reduced height.
- VPHDW and VPHEW holders with dual side vacuum ports, suitable for piping connection of multiple vacuum pads.



Low dust emission holders (VPLFC, VPLFD) with low noise and less wear from sliding are available to prevent dust generation.

VPLFC holder with top port has a separate shaft on the pad side and the vacuum port side, so there is no effect on the stroke caused by the tension of the tube. Low load type is also available to suppress impact when contacting the work-piece.


Wide variations of fixed type direct mount holder (VPE) for various thread sizes.

Metric male threads, metric female threads, taper pipe threads and parallel pipe threads are available.


* These are not shown in the model code list from the next page. Contact us for the details.

Large Suction Flow type

Increased flow holes dramatically improve suction flow and adsorption power.

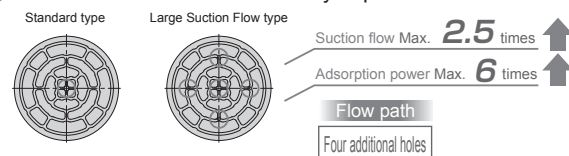

Smaller and lighter screw adapters. Reduced height makes the product more compact. Moreover, grooving on the screw adapter secures the flow path.

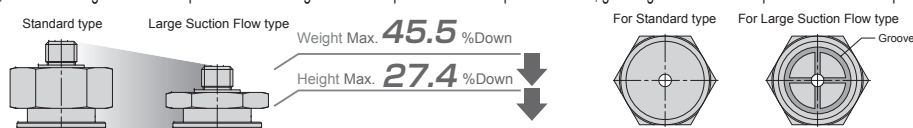

Pad surface treatment for suction mark-free (Optional)

Fluoro-coating type is added to the pad rubber surface treatment option to prevent tracing marks.

- DLC coating type: Slippery special coating. Effective for sticking prevention of lightweight or thin work-piece.
- Reformed surface type: Reduces tracing marks by surface reforming of nitrile rubber with chemicals.
- Fluoro-coating type: Surface reforming by special treatment prevents sticking to work-pieces. Improved pad durability and wear resistance.

Holder with dust catcher (Optional)

Collects wear debris generated by sliding spring type holders.

Low-cost, simple holder with receiver tray added.

Applicable to VPC, VPD and VPF holders.



Accessories (Optional)

Fall Prevention Valve, Swivel (Ball Swivel Joint, Flexible Swing Joint) and Filter options are available.

-S3 spec. (Optional)

No copper-based metallic materials used in flow paths.

The sealing rubber material of the fitting is HNBR or FKM, with good ozone resistance.

RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad dia. (mm)	Tube O.D. (mm)	Model code	 -S3 -S3 spec.	Connection config. code	Pad dia. (mm)	Tube O.D. (inch)	Model code	 -S3 -S3 spec.	Connection config. code	
Fixed type, Top port, Push-in fitting, Mini VPMA 	ø10	ø3	VPM1051617-3J	—	M4	ø10	ø5/32	VPM1051617-1/4J 	○	M4	
		ø4	VPM1051617-4J 	○			ø15	ø5/32	VPM1551617-1/4J 		○
	ø15	ø3	VPM1551617-3J	—	M6	ø20	ø5/32	VPM2051617-1/4J 	○	M6	
		ø4	VPM1551617-4J 	○			ø25	ø5/32	VPM2551617-1/4J 		○
		ø20	ø4	VPM2051617-4J 	○	M6	ø30	ø5/32	VPM3051617-1/4J 	○	
		ø25	ø4	VPM2551617-4J 	○						
	ø30	ø4	VPM3051617-4J 	○							
Holder type	Pad dia. (mm)	Tube O.D. (mm)	Model code	 -S3 -S3 spec.	Connection config. code	Pad dia. (mm)	Tube O.D. (inch)	Model code	 -S3 -S3 spec.	Connection config. code	
Fixed type, Top port, Push-in fitting, Standard VPA 	ø10	ø6	VPA1051617-6J 	○	M4	ø10	ø1/4	VPA1051617-1/4J	—	M4	
		ø15	ø6	VPA1551617-6J 			○	ø15	ø1/4		VPA1551617-1/4J
			ø3	VPA2051617-3J	—		ø20		ø1/8	VPA2051617-1/4J	—
		ø4	VPA2051617-4J 	○	ø5/32			VPA2051617-1/2J 	○		
	ø20	ø6	VPA2051617-6J 	○		ø1/4	VPA2051617-1/4J	—			
		ø3	VPA2551617-3J	—			ø25	ø1/8	VPA2551617-1/4J	—	
	ø25	ø4	VPA2551617-4J 	○	M6	ø5/32		VPA2551617-1/2J 	○		
		ø6	VPA2551617-6J 	○			ø1/4	VPA2551617-1/4J	—		
	ø30	ø3	VPA3051617-3J	—		ø30		ø1/8	VPA3051617-1/4J	—	
		ø4	VPA3051617-4J 	○			ø5/32	VPA3051617-1/2J 	○		
ø6		VPA3051617-6J 	○	ø1/4			VPA3051617-1/4J	—			
Holder type	Pad dia. (mm)	Male thread size	Model code	 -S3 -S3 spec.	Connection config. code						
Fixed type, Top port, Female thread, Standard VPA 	ø20	M6×1	VPA2051617-M6 	○	M6						
	ø25	M6×1	VPA2551617-M6 	○							
	ø30	M6×1	VPA3051617-M6 	○							



Notes

- *1 Barb fitting type holders are also selectable. Contact us for the details.
- *2 Large Suction Flow type is not available on Urethane rubber (U).



CAD data is available at PISCO website.



Packaging specifications 1 pc./bag



Options

17 : Surface treatment (DLC coating, Reformed surface, and Fluoro-coating)

13 : -S3 ⇒ -S3 spec. (○ in the lists: Available)

*1 For "-S3 spec.", the release ring color is dark blue, and the gasket material is FKM+SUS316.

*2. For inch size push-in fitting, the release ring color is white even for "-S3 spec."



Vacuum Pad Flat Type/Flat Large Suction Flow Type

RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad dia. (mm)	Tube O.D. (mm)	Model code	13 -S3 -S3 spec.	Connection config. code	Pad dia. (mm)	Tube O.D. (inch)	Model code	13 -S3 -S3 spec.	Connection config. code
Fixed type, Side port, Push-in fitting, Mini VPMB 	ø10	ø3	VPMB1051617-3J	—	M4	ø10	ø1/8	VPMB1051617-1/4J	—	M4
		ø4	VPMB1051617-4J13	○			ø5/32	VPMB1051617-1/2J13	○	
		ø6	VPMB1051617-6J13	○			ø1/4	VPMB1051617-1/4J	—	
	ø15	ø3	VPMB1551617-3J	—	M4	ø15	ø1/8	VPMB1551617-1/4J	—	M4
		ø4	VPMB1551617-4J13	○			ø5/32	VPMB1551617-1/2J13	○	
		ø6	VPMB1551617-6J13	○			ø1/4	VPMB1551617-1/4J	—	
	ø20	ø3	VPMB2051617-3J	—	M4	ø20	ø1/8	VPMB2051617-1/4J	—	M4
		ø4	VPMB2051617-4J13	○			ø5/32	VPMB2051617-1/2J13	○	
		ø6	VPMB2051617-6J13	○			ø1/4	VPMB2051617-1/4J	—	
	ø25	ø3	VPMB2551617-3J	—	M6	ø25	ø1/8	VPMB2551617-1/4J	—	M6
		ø4	VPMB2551617-4J13	○			ø5/32	VPMB2551617-1/2J13	○	
		ø6	VPMB2551617-6J13	○			ø1/4	VPMB2551617-1/4J	—	
	ø30	ø3	VPMB3051617-3J	—	M6	ø30	ø1/8	VPMB3051617-1/4J	—	M6
		ø4	VPMB3051617-4J13	○			ø5/32	VPMB3051617-1/2J13	○	
		ø6	VPMB3051617-6J13	○			ø1/4	VPMB3051617-1/4J	—	
Holder type	Pad dia. (mm)	Male thread size	Model code	13 -S3 -S3 spec.	Connection config. code					
Fixed type, Side port, Female thread, Mini VPMB 	ø10	M5×0.8	VPMB1051617-M513	○	M4					
	ø15	M5×0.8	VPMB1551617-M513	○						
	ø20	M5×0.8	VPMB2051617-M513	○	M6					
	ø25	M5×0.8	VPMB2551617-M513	○						
	ø30	M5×0.8	VPMB3051617-M513	○						

Notes
 *1 Holders are also available in Push-in fitting type for tube O.D. of 1.8 mm and 2 mm, and barb fitting type. Contact us for the details.
 *2 Large Suction Flow type is not available on Urethane rubber (U).

CAD data is available at PISCO website.

Packaging specifications
 1 pc./bag

Options
 17 : Surface treatment (DLC. coating, Reformed surface, and Fluoro-coating)
 13 : -S3 ⇒ -S3 spec. (○ in the lists: Available)
 *1 For "-S3 spec.", the release ring color is dark blue, and the gasket material is FKM+SUS316.
 *2 For inch size push-in fitting, the release ring color is white even for "-S3 spec."



RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad dia. (mm)	Tube O.D. (mm)	Model code	13 -S3 -S3 spec.	Connection config. code	Pad dia. (mm)	Tube O.D. (inch)	Model code	13 -S3 -S3 spec.	Connection config. code
Fixed type, Side port, Push-in fitting, Standard VPB 	ø10	ø3	VPB10-51617-3J	—	M4	ø10	ø1/8	VPB10-51617-1/4J	—	M4
		ø4	VPB10-51617-4J13	○			ø5/32	VPB10-51617-1/2J13	○	
		ø6	VPB10-51617-6J13	○			ø1/4	VPB10-51617-1/4J	—	
	ø15	ø3	VPB15-51617-3J	—	M4	ø15	ø1/8	VPB15-51617-1/4J	—	M4
		ø4	VPB15-51617-4J13	○			ø5/32	VPB15-51617-1/2J13	○	
		ø6	VPB15-51617-6J13	○			ø1/4	VPB15-51617-1/4J	—	
	ø20	ø3	VPB20-51617-3J	—	M6	ø20	ø1/8	VPB20-51617-1/4J	—	M6
		ø4	VPB20-51617-4J13	○			ø5/32	VPB20-51617-1/2J13	○	
		ø6	VPB20-51617-6J13	○			ø1/4	VPB20-51617-1/4J	—	
	ø25	ø3	VPB25-51617-3J	—	M6	ø25	ø1/8	VPB25-51617-1/4J	—	M6
		ø4	VPB25-51617-4J13	○			ø5/32	VPB25-51617-1/2J13	○	
		ø6	VPB25-51617-6J13	○			ø1/4	VPB25-51617-1/4J	—	
	ø30	ø3	VPB30-51617-3J	—	M6	ø30	ø1/8	VPB30-51617-1/4J	—	M6
		ø4	VPB30-51617-4J13	○			ø5/32	VPB30-51617-1/2J13	○	
		ø6	VPB30-51617-6J13	○			ø1/4	VPB30-51617-1/4J	—	
Holder type	Pad dia. (mm)	Male thread size	Model code	13 -S3 -S3 spec.	Connection config. code					
Fixed type, Side port, Female thread, Standard VPB 	ø10	M6×1	VPB10-51617-M613	○	M4					
	ø15	M6×1	VPB15-51617-M613	○						
	ø20	M6×1	VPB20-51617-M613	○	M6					
	ø25	M6×1	VPB25-51617-M613	○						
	ø30	M6×1	VPB30-51617-M613	○						
Holder type	Pad dia. (mm)	Tube O.D. (mm)	Model code	13 -S3 -S3 spec.	Connection config. code	Pad dia. (mm)	Tube O.D. (inch)	Model code	13 -S3 -S3 spec.	Connection config. code
Spring type, Top port, Push-in fitting, Mini VPMC 	ø10	ø3	VPMC10-451617-3J	—	M4	ø10	ø1/8	VPMC10-451617-1/4J	—	M4
		ø4	VPMC10-451617-4J13	○			ø5/32	VPMC10-451617-1/2J13	○	
		ø6	VPMC10-451617-6J13	○			ø1/4	VPMC10-451617-1/4J	—	
	ø15	ø3	VPMC15-451617-3J	—	M4	ø15	ø1/8	VPMC15-451617-1/4J	—	M4
		ø4	VPMC15-451617-4J13	○			ø5/32	VPMC15-451617-1/2J13	○	
		ø6	VPMC15-451617-6J13	○			ø1/4	VPMC15-451617-1/4J	—	
	ø20	ø3	VPMC20-451617-3J	—	M6	ø20	ø1/8	VPMC20-451617-1/4J	—	M6
		ø4	VPMC20-451617-4J13	○			ø5/32	VPMC20-451617-1/2J13	○	
		ø6	VPMC20-451617-6J13	○			ø1/4	VPMC20-451617-1/4J	—	
	ø25	ø3	VPMC25-451617-3J	—	M6	ø25	ø1/8	VPMC25-451617-1/4J	—	M6
		ø4	VPMC25-451617-4J13	○			ø5/32	VPMC25-451617-1/2J13	○	
		ø6	VPMC25-451617-6J13	○			ø1/4	VPMC25-451617-1/4J	—	
	ø30	ø3	VPMC30-451617-3J	—	M6	ø30	ø1/8	VPMC30-451617-1/4J	—	M6
		ø4	VPMC30-451617-4J13	○			ø5/32	VPMC30-451617-1/2J13	○	
		ø6	VPMC30-451617-6J13	○			ø1/4	VPMC30-451617-1/4J	—	
Stroke 4mm										

Notes
 *1 Barb fitting type holders are also selectable. VPMC holders are also available in Push-in fitting type for tube O.D. of 1.8 mm and 2 mm. Contact us for the details.
 *2 Large Suction Flow type is not available on Urethane rubber (U).

CAD data is available at PISCO website.

Packaging specifications
 1 pc./bag

Options
 17 : Surface treatment (DLC. coating, Reformed surface, and Fluoro-coating)
 13 : -S3 ⇒ -S3 spec. (○ in the lists: Available)
 *1 For "-S3 spec.", the release ring color is dark blue, and the gasket material is FKM+SUS316.
 *2 For inch size push-in fitting, the release ring color is white even for "-S3 spec."



Vacuum Pad Flat Type/Flat Large Suction Flow Type

RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad dia. (mm)	Stroke (mm)	Tube O.D. (mm)	Model code	⑬ -S3 -S3 spec.	Connection config. code	Pad dia. (mm)	Stroke (mm)	Tube O.D. (inch)	Model code	⑬ -S3 -S3 spec.	Connection config. code
Spring type, Top port, Push-in fitting, Standard VPC	ø10	6	ø3	VPC10-6⑤⑥⑦-3J⑨	—	M4	ø10	6	ø1/8	VPC10-6⑤⑥⑦-④J⑨	—	M4
			ø4	VPC10-6⑤⑥⑦-4J⑨	○				ø5/32	VPC10-6⑤⑥⑦-④J⑨	○	
			ø6	VPC10-6⑤⑥⑦-6J⑨	—				ø1/4	VPC10-6⑤⑥⑦-④J⑨	—	
		10	ø3	VPC10-10⑤⑥⑦-3J⑨	—			10	ø1/8	VPC10-10⑤⑥⑦-④J⑨	—	
			ø4	VPC10-10⑤⑥⑦-4J⑨	—				ø5/32	VPC10-10⑤⑥⑦-④J⑨	—	
			ø6	VPC10-10⑤⑥⑦-6J⑨	—				ø1/4	VPC10-10⑤⑥⑦-④J⑨	—	
		15	ø3	VPC10-15⑤⑥⑦-3J⑨	—			15	ø1/8	VPC10-15⑤⑥⑦-④J⑨	—	
			ø4	VPC10-15⑤⑥⑦-4J⑨	—				ø5/32	VPC10-15⑤⑥⑦-④J⑨	—	
			ø6	VPC10-15⑤⑥⑦-6J⑨	—				ø1/4	VPC10-15⑤⑥⑦-④J⑨	—	
		20	ø3	VPC10-20⑤⑥⑦-3J⑨	—			20	ø1/8	VPC10-20⑤⑥⑦-④J⑨	—	
			ø4	VPC10-20⑤⑥⑦-4J⑨	—				ø5/32	VPC10-20⑤⑥⑦-④J⑨	—	
			ø6	VPC10-20⑤⑥⑦-6J⑨	—				ø1/4	VPC10-20⑤⑥⑦-④J⑨	—	
	ø15	6	ø3	VPC15-6⑤⑥⑦-3J⑨	—	M4	ø15	6	ø1/8	VPC15-6⑤⑥⑦-④J⑨	—	M4
			ø4	VPC15-6⑤⑥⑦-4J⑨	○				ø5/32	VPC15-6⑤⑥⑦-④J⑨	○	
			ø6	VPC15-6⑤⑥⑦-6J⑨	—				ø1/4	VPC15-6⑤⑥⑦-④J⑨	—	
		10	ø3	VPC15-10⑤⑥⑦-3J⑨	—			10	ø1/8	VPC15-10⑤⑥⑦-④J⑨	—	
			ø4	VPC15-10⑤⑥⑦-4J⑨	—				ø5/32	VPC15-10⑤⑥⑦-④J⑨	—	
			ø6	VPC15-10⑤⑥⑦-6J⑨	—				ø1/4	VPC15-10⑤⑥⑦-④J⑨	—	
		15	ø3	VPC15-15⑤⑥⑦-3J⑨	—			15	ø1/8	VPC15-15⑤⑥⑦-④J⑨	—	
			ø4	VPC15-15⑤⑥⑦-4J⑨	—				ø5/32	VPC15-15⑤⑥⑦-④J⑨	—	
			ø6	VPC15-15⑤⑥⑦-6J⑨	—				ø1/4	VPC15-15⑤⑥⑦-④J⑨	—	
		20	ø3	VPC15-20⑤⑥⑦-3J⑨	—			20	ø1/8	VPC15-20⑤⑥⑦-④J⑨	—	
			ø4	VPC15-20⑤⑥⑦-4J⑨	—				ø5/32	VPC15-20⑤⑥⑦-④J⑨	—	
			ø6	VPC15-20⑤⑥⑦-6J⑨	—				ø1/4	VPC15-20⑤⑥⑦-④J⑨	—	
	ø20	6	ø3	VPC20-6⑤⑥⑦-3J⑨	—	M4	ø20	6	ø1/8	VPC20-6⑤⑥⑦-④J⑨	—	M4
			ø4	VPC20-6⑤⑥⑦-4J⑨	○				ø5/32	VPC20-6⑤⑥⑦-④J⑨	○	
			ø6	VPC20-6⑤⑥⑦-6J⑨	—				ø1/4	VPC20-6⑤⑥⑦-④J⑨	—	
		10	ø3	VPC20-10⑤⑥⑦-3J⑨	—			10	ø1/8	VPC20-10⑤⑥⑦-④J⑨	—	
			ø4	VPC20-10⑤⑥⑦-4J⑨	—				ø5/32	VPC20-10⑤⑥⑦-④J⑨	—	
			ø6	VPC20-10⑤⑥⑦-6J⑨	—				ø1/4	VPC20-10⑤⑥⑦-④J⑨	—	
		15	ø3	VPC20-15⑤⑥⑦-3J⑨	—			15	ø1/8	VPC20-15⑤⑥⑦-④J⑨	—	
			ø4	VPC20-15⑤⑥⑦-4J⑨	—				ø5/32	VPC20-15⑤⑥⑦-④J⑨	—	
			ø6	VPC20-15⑤⑥⑦-6J⑨	—				ø1/4	VPC20-15⑤⑥⑦-④J⑨	—	
		20	ø3	VPC20-20⑤⑥⑦-3J⑨	—			20	ø1/8	VPC20-20⑤⑥⑦-④J⑨	—	
			ø4	VPC20-20⑤⑥⑦-4J⑨	—				ø5/32	VPC20-20⑤⑥⑦-④J⑨	—	
			ø6	VPC20-20⑤⑥⑦-6J⑨	—				ø1/4	VPC20-20⑤⑥⑦-④J⑨	—	
	ø25	6	ø3	VPC25-6⑤⑥⑦-3J⑨	—	M6	ø25	6	ø1/8	VPC25-6⑤⑥⑦-④J⑨	—	M6
			ø4	VPC25-6⑤⑥⑦-4J⑨	○				ø5/32	VPC25-6⑤⑥⑦-④J⑨	○	
			ø6	VPC25-6⑤⑥⑦-6J⑨	—				ø1/4	VPC25-6⑤⑥⑦-④J⑨	—	
		10	ø3	VPC25-10⑤⑥⑦-3J⑨	—			10	ø1/8	VPC25-10⑤⑥⑦-④J⑨	—	
			ø4	VPC25-10⑤⑥⑦-4J⑨	—				ø5/32	VPC25-10⑤⑥⑦-④J⑨	—	
			ø6	VPC25-10⑤⑥⑦-6J⑨	—				ø1/4	VPC25-10⑤⑥⑦-④J⑨	—	
		15	ø3	VPC25-15⑤⑥⑦-3J⑨	—			15	ø1/8	VPC25-15⑤⑥⑦-④J⑨	—	
			ø4	VPC25-15⑤⑥⑦-4J⑨	—				ø5/32	VPC25-15⑤⑥⑦-④J⑨	—	
			ø6	VPC25-15⑤⑥⑦-6J⑨	—				ø1/4	VPC25-15⑤⑥⑦-④J⑨	—	
		20	ø3	VPC25-20⑤⑥⑦-3J⑨	—			20	ø1/8	VPC25-20⑤⑥⑦-④J⑨	—	
			ø4	VPC25-20⑤⑥⑦-4J⑨	—				ø5/32	VPC25-20⑤⑥⑦-④J⑨	—	
			ø6	VPC25-20⑤⑥⑦-6J⑨	—				ø1/4	VPC25-20⑤⑥⑦-④J⑨	—	
ø30	ø30	6	ø3	VPC30-6⑤⑥⑦-3J⑨	—		ø30	6	ø1/8	VPC30-6⑤⑥⑦-④J⑨	—	
			ø4	VPC30-6⑤⑥⑦-4J⑨	○				ø5/32	VPC30-6⑤⑥⑦-④J⑨	○	
			ø6	VPC30-6⑤⑥⑦-6J⑨	—				ø1/4	VPC30-6⑤⑥⑦-④J⑨	—	
		10	ø3	VPC30-10⑤⑥⑦-3J⑨	—			10	ø1/8	VPC30-10⑤⑥⑦-④J⑨	—	
			ø4	VPC30-10⑤⑥⑦-4J⑨	—				ø5/32	VPC30-10⑤⑥⑦-④J⑨	—	
			ø6	VPC30-10⑤⑥⑦-6J⑨	—				ø1/4	VPC30-10⑤⑥⑦-④J⑨	—	
		15	ø3	VPC30-15⑤⑥⑦-3J⑨	—			15	ø1/8	VPC30-15⑤⑥⑦-④J⑨	—	
			ø4	VPC30-15⑤⑥⑦-4J⑨	—				ø5/32	VPC30-15⑤⑥⑦-④J⑨	—	
			ø6	VPC30-15⑤⑥⑦-6J⑨	—				ø1/4	VPC30-15⑤⑥⑦-④J⑨	—	
		20	ø3	VPC30-20⑤⑥⑦-3J⑨	—			20	ø1/8	VPC30-20⑤⑥⑦-④J⑨	—	
			ø4	VPC30-20⑤⑥⑦-4J⑨	—				ø5/32	VPC30-20⑤⑥⑦-④J⑨	—	
			ø6	VPC30-20⑤⑥⑦-6J⑨	—				ø1/4	VPC30-20⑤⑥⑦-④J⑨	—	

RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad dia. (mm)	Stroke (mm)	Male thread size	Model code	⑬ -S3 -S3 spec.	Connection config. code
Spring type, Top port, Female thread, Standard VPC	ø10	6	M6×1	VPC10-6⑤⑥⑦-④J⑨	○	M4
		10		VPC10-10⑤⑥⑦-④J⑨	—	
		15		VPC10-15⑤⑥⑦-④J⑨	—	
		20		VPC10-20⑤⑥⑦-④J⑨	—	
	ø15	6	M6×1	VPC15-6⑤⑥⑦-④J⑨	○	M4
		10		VPC15-10⑤⑥⑦-④J⑨	—	
		15		VPC15-15⑤⑥⑦-④J⑨	—	
		20		VPC15-20⑤⑥⑦-④J⑨	—	
	ø20	6	M6×1	VPC20-6⑤⑥⑦-④J⑨	○	M6
		10		VPC20-10⑤⑥⑦-④J⑨	—	
		15		VPC20-15⑤⑥⑦-④J⑨	—	
		20		VPC20-20⑤⑥⑦-④J⑨	—	
	ø25	6	M6×1	VPC25-6⑤⑥⑦-④J⑨	○	M6
		10		VPC25-10⑤⑥⑦-④J⑨	—	
		15		VPC25-15⑤⑥⑦-④J⑨	—	
		20		VPC25-20⑤⑥⑦-④J⑨	—	
	ø30	6	M6×1	VPC30-6⑤⑥⑦-④J⑨	○	M6
		10		VPC30-10⑤⑥⑦-④J⑨	—	
		15		VPC30-15⑤⑥⑦-④J⑨	—	
		20		VPC30-20⑤⑥⑦-④J⑨	—	



Notes

- *1 Barb fitting type holders are also selectable. Contact us for the details.
- *2 Large Suction Flow type is not available on Urethane rubber (U).



CAD

CAD data is available at PISCO website.



Packaging

specifications 1 pc./bag



Options

⑦ : Surface treatment (DLC. coating, Reformed surface, and Fluoro-coating)

⑨ : -DC ⇒ Holder with dust catcher

⑬ : -S3 ⇒ -S3 spec. (○ in the lists: Available)

*1 For "-S3 spec.", the release ring color is dark blue, and the gasket material is FKM+SUS316.

*2 For inch size push-in fitting, the release ring color is white even for "-S3 spec."

Optional items ⇒ P.640	Pad surface treatment for suction mark-free	Dust Catcher (VPC)	Fall Prevention Valve	Swivel Joint for vacuum pad	Filter
------------------------	---	--------------------	-----------------------	-----------------------------	--------

Vacuum Pad Flat Type/Flat Large Suction Flow Type

RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad dia. (mm)	Stroke (mm)	Tube O.D. (mm)	Model code	Connection config. code	Pad dia. (mm)	Stroke (mm)	Tube O.D. (inch)	Model code	Connection config. code
Spring type, Top port, Push-in fitting, No cover VPOC 	ø10	20	ø3	VPOC10-2051617-3J	M4	ø10	20	ø1/8	VPOC10-2051617-1/4J	M4
			ø4	VPOC10-2051617-4J				ø5/32	VPOC10-2051617-5/32J	
			ø6	VPOC10-2051617-6J				ø1/4	VPOC10-2051617-1/4J	
		30	ø3	VPOC10-3051617-3J			30	ø1/8	VPOC10-3051617-1/4J	
			ø4	VPOC10-3051617-4J				ø5/32	VPOC10-3051617-5/32J	
			ø6	VPOC10-3051617-6J				ø1/4	VPOC10-3051617-1/4J	
		40	ø3	VPOC10-4051617-3J			40	ø1/8	VPOC10-4051617-1/4J	
			ø4	VPOC10-4051617-4J				ø5/32	VPOC10-4051617-5/32J	
			ø6	VPOC10-4051617-6J				ø1/4	VPOC10-4051617-1/4J	
		50	ø3	VPOC10-5051617-3J			50	ø1/8	VPOC10-5051617-1/4J	
			ø4	VPOC10-5051617-4J				ø5/32	VPOC10-5051617-5/32J	
			ø6	VPOC10-5051617-6J				ø1/4	VPOC10-5051617-1/4J	
	ø15	20	ø3	VPOC15-2051617-3J	M4	ø15	20	ø1/8	VPOC15-2051617-1/4J	M4
			ø4	VPOC15-2051617-4J				ø5/32	VPOC15-2051617-5/32J	
			ø6	VPOC15-2051617-6J				ø1/4	VPOC15-2051617-1/4J	
		30	ø3	VPOC15-3051617-3J			30	ø1/8	VPOC15-3051617-1/4J	
			ø4	VPOC15-3051617-4J				ø5/32	VPOC15-3051617-5/32J	
			ø6	VPOC15-3051617-6J				ø1/4	VPOC15-3051617-1/4J	
		40	ø3	VPOC15-4051617-3J			40	ø1/8	VPOC15-4051617-1/4J	
			ø4	VPOC15-4051617-4J				ø5/32	VPOC15-4051617-5/32J	
			ø6	VPOC15-4051617-6J				ø1/4	VPOC15-4051617-1/4J	
		50	ø3	VPOC15-5051617-3J			50	ø1/8	VPOC15-5051617-1/4J	
			ø4	VPOC15-5051617-4J				ø5/32	VPOC15-5051617-5/32J	
			ø6	VPOC15-5051617-6J				ø1/4	VPOC15-5051617-1/4J	
	ø20	20	ø3	VPOC20-2051617-3J	M4	ø20	20	ø1/8	VPOC20-2051617-1/4J	M4
			ø4	VPOC20-2051617-4J				ø5/32	VPOC20-2051617-5/32J	
			ø6	VPOC20-2051617-6J				ø1/4	VPOC20-2051617-1/4J	
		30	ø3	VPOC20-3051617-3J			30	ø1/8	VPOC20-3051617-1/4J	
			ø4	VPOC20-3051617-4J				ø5/32	VPOC20-3051617-5/32J	
			ø6	VPOC20-3051617-6J				ø1/4	VPOC20-3051617-1/4J	
		40	ø3	VPOC20-4051617-3J			40	ø1/8	VPOC20-4051617-1/4J	
			ø4	VPOC20-4051617-4J				ø5/32	VPOC20-4051617-5/32J	
			ø6	VPOC20-4051617-6J				ø1/4	VPOC20-4051617-1/4J	
		50	ø3	VPOC20-5051617-3J			50	ø1/8	VPOC20-5051617-1/4J	
			ø4	VPOC20-5051617-4J				ø5/32	VPOC20-5051617-5/32J	
			ø6	VPOC20-5051617-6J				ø1/4	VPOC20-5051617-1/4J	
	ø25	20	ø3	VPOC25-2051617-3J	M6	ø25	20	ø1/8	VPOC25-2051617-1/4J	M6
			ø4	VPOC25-2051617-4J				ø5/32	VPOC25-2051617-5/32J	
			ø6	VPOC25-2051617-6J				ø1/4	VPOC25-2051617-1/4J	
		30	ø3	VPOC25-3051617-3J			30	ø1/8	VPOC25-3051617-1/4J	
			ø4	VPOC25-3051617-4J				ø5/32	VPOC25-3051617-5/32J	
			ø6	VPOC25-3051617-6J				ø1/4	VPOC25-3051617-1/4J	
		40	ø3	VPOC25-4051617-3J			40	ø1/8	VPOC25-4051617-1/4J	
			ø4	VPOC25-4051617-4J				ø5/32	VPOC25-4051617-5/32J	
			ø6	VPOC25-4051617-6J				ø1/4	VPOC25-4051617-1/4J	
		50	ø3	VPOC25-5051617-3J			50	ø1/8	VPOC25-5051617-1/4J	
			ø4	VPOC25-5051617-4J				ø5/32	VPOC25-5051617-5/32J	
			ø6	VPOC25-5051617-6J				ø1/4	VPOC25-5051617-1/4J	
	ø30	20	ø3	VPOC30-2051617-3J	M6	ø30	20	ø1/8	VPOC30-2051617-1/4J	M6
			ø4	VPOC30-2051617-4J				ø5/32	VPOC30-2051617-5/32J	
			ø6	VPOC30-2051617-6J				ø1/4	VPOC30-2051617-1/4J	
		30	ø3	VPOC30-3051617-3J			30	ø1/8	VPOC30-3051617-1/4J	
			ø4	VPOC30-3051617-4J				ø5/32	VPOC30-3051617-5/32J	
			ø6	VPOC30-3051617-6J				ø1/4	VPOC30-3051617-1/4J	
		40	ø3	VPOC30-4051617-3J			40	ø1/8	VPOC30-4051617-1/4J	
			ø4	VPOC30-4051617-4J				ø5/32	VPOC30-4051617-5/32J	
			ø6	VPOC30-4051617-6J				ø1/4	VPOC30-4051617-1/4J	
		50	ø3	VPOC30-5051617-3J			50	ø1/8	VPOC30-5051617-1/4J	
			ø4	VPOC30-5051617-4J				ø5/32	VPOC30-5051617-5/32J	
			ø6	VPOC30-5051617-6J				ø1/4	VPOC30-5051617-1/4J	

RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad dia. (mm)	Stroke (mm)	Male thread size	Model code	Connection config. code
Spring type, Top port, Female thread, No cover VPOC 	ø10	20	M6×1	VPOC10-2051617-M6	M4
		30		VPOC10-3051617-M6	
		40		VPOC10-4051617-M6	
		50		VPOC10-5051617-M6	
	ø15	20	M6×1	VPOC15-2051617-M6	M4
		30		VPOC15-3051617-M6	
		40		VPOC15-4051617-M6	
		50		VPOC15-5051617-M6	
	ø20	20	M6×1	VPOC20-2051617-M6	M6
		30		VPOC20-3051617-M6	
		40		VPOC20-4051617-M6	
		50		VPOC20-5051617-M6	
	ø25	20	M6×1	VPOC25-2051617-M6	M6
		30		VPOC25-3051617-M6	
		40		VPOC25-4051617-M6	
		50		VPOC25-5051617-M6	
	ø30	20	M6×1	VPOC30-2051617-M6	M6
		30		VPOC30-3051617-M6	
		40		VPOC30-4051617-M6	
		50		VPOC30-5051617-M6	



Notes

- *1 Barb fitting type holders are also selectable. Contact us for the details.
- *2 Large Suction Flow type is not available on Urethane rubber (U).



CAD data is available
at PISCO website.



Packaging specifications
1 pc./bag



Options

[7] : Surface treatment (DLC. coating, Reformed surface, and Fluoro-coating)

Optional items ⇒ P.640	Pad surface treatment for suction mark-free	Fall Prevention Valve	Swivel Joint for vacuum pad	Filter
---------------------------	---	-----------------------------	-----------------------------------	--------



Vacuum Pad Flat Type/Flat Large Suction Flow Type

RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad dia. (mm)	Stroke (mm)	Tube O.D. (mm)	Model code	Connection config. code	Pad dia. (mm)	Stroke (mm)	Tube O.D. (mm)	Model code	Connection config. code
Spring type, Top port, Push-in fitting, Low dust emission VPLFC	ø10	2	ø3	VPLFC10-25167-3J	M4	ø10	2	ø1/8	VPLFC10-25167-1/4J	M4
			ø4	VPLFC10-25167-4J				ø5/32	VPLFC10-25167-1/4J	
		5	ø3	VPLFC10-55167-3J			5	ø1/8	VPLFC10-55167-1/4J	
			ø4	VPLFC10-55167-4J				ø5/32	VPLFC10-55167-1/4J	
		10	ø3	VPLFC10-105167-3J			10	ø1/8	VPLFC10-105167-1/4J	
			ø4	VPLFC10-105167-4J				ø5/32	VPLFC10-105167-1/4J	
		15	ø3	VPLFC10-155167-3J			15	ø1/8	VPLFC10-155167-1/4J	
			ø4	VPLFC10-155167-4J				ø5/32	VPLFC10-155167-1/4J	
		20	ø3	VPLFC10-205167-3J			20	ø1/8	VPLFC10-205167-1/4J	
			ø4	VPLFC10-205167-4J				ø5/32	VPLFC10-205167-1/4J	
	ø15	2	ø3	VPLFC15-25167-3J		ø15	2	ø1/8	VPLFC15-25167-1/4J	
			ø4	VPLFC15-25167-4J				ø5/32	VPLFC15-25167-1/4J	
		5	ø3	VPLFC15-55167-3J			5	ø1/8	VPLFC15-55167-1/4J	
			ø4	VPLFC15-55167-4J				ø5/32	VPLFC15-55167-1/4J	
		10	ø3	VPLFC15-105167-3J			10	ø1/8	VPLFC15-105167-1/4J	
			ø4	VPLFC15-105167-4J				ø5/32	VPLFC15-105167-1/4J	
		15	ø3	VPLFC15-155167-3J			15	ø1/8	VPLFC15-155167-1/4J	
			ø4	VPLFC15-155167-4J				ø5/32	VPLFC15-155167-1/4J	
		20	ø3	VPLFC15-205167-3J			20	ø1/8	VPLFC15-205167-1/4J	
			ø4	VPLFC15-205167-4J				ø5/32	VPLFC15-205167-1/4J	
	ø20	5	ø3	VPLFC20-55167-3J		ø20	5	ø1/8	VPLFC20-55167-1/4J	
			ø4	VPLFC20-55167-4J				ø5/32	VPLFC20-55167-1/4J	
		10	ø3	VPLFC20-105167-3J			10	ø1/8	VPLFC20-105167-1/4J	
			ø4	VPLFC20-105167-4J				ø5/32	VPLFC20-105167-1/4J	
		15	ø3	VPLFC20-155167-3J			15	ø1/8	VPLFC20-155167-1/4J	
			ø4	VPLFC20-155167-4J				ø5/32	VPLFC20-155167-1/4J	
		20	ø3	VPLFC20-205167-3J			20	ø1/8	VPLFC20-205167-1/4J	
			ø4	VPLFC20-205167-4J				ø5/32	VPLFC20-205167-1/4J	
	ø25	5	ø3	VPLFC25-55167-3J		ø25	5	ø1/8	VPLFC25-55167-1/4J	
			ø4	VPLFC25-55167-4J				ø5/32	VPLFC25-55167-1/4J	
		10	ø3	VPLFC25-105167-3J			10	ø1/8	VPLFC25-105167-1/4J	
			ø4	VPLFC25-105167-4J				ø5/32	VPLFC25-105167-1/4J	
		15	ø3	VPLFC25-155167-3J			15	ø1/8	VPLFC25-155167-1/4J	
			ø4	VPLFC25-155167-4J				ø5/32	VPLFC25-155167-1/4J	
		20	ø3	VPLFC25-205167-3J			20	ø1/8	VPLFC25-205167-1/4J	
			ø4	VPLFC25-205167-4J				ø5/32	VPLFC25-205167-1/4J	
	ø30	5	ø3	VPLFC30-55167-3J		ø30	5	ø1/8	VPLFC30-55167-1/4J	
			ø4	VPLFC30-55167-4J				ø5/32	VPLFC30-55167-1/4J	
		10	ø3	VPLFC30-105167-3J			10	ø1/8	VPLFC30-105167-1/4J	
			ø4	VPLFC30-105167-4J				ø5/32	VPLFC30-105167-1/4J	
		15	ø3	VPLFC30-155167-3J			15	ø1/8	VPLFC30-155167-1/4J	
			ø4	VPLFC30-155167-4J				ø5/32	VPLFC30-155167-1/4J	
		20	ø3	VPLFC30-205167-3J			20	ø1/8	VPLFC30-205167-1/4J	
			ø4	VPLFC30-205167-4J				ø5/32	VPLFC30-205167-1/4J	
		20	ø6	VPLFC30-205167-6J			20	ø1/4	VPLFC30-205167-1/4J	
			ø6	VPLFC30-205167-6J				ø1/4	VPLFC30-205167-1/4J	

- Notes**
- *1 Barb fitting type holders are also selectable. Contact us for the details.
 - *2 Large Suction Flow type is not available on Urethane rubber (U).

Packaging specifications

1 pc./bag

Options

[7] : Surface treatment (DLC. coating, Reformed surface, and Fluoro-coating)

[9] : -SF1/4 ⇒ Spring load 1/4



RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad dia. (mm)	Stroke (mm)	Male thread size	Model code	Connec- tion config. code				
Spring type, Top port, Female thread, Low dust emission VPLFC 	ø10	2	M5×0.8	VPLFC10-25167-M5	M4				
		5	M5×0.8	VPLFC10-55167-M5					
		10	M5×0.8	VPLFC10-105167-M5					
		15	M5×0.8	VPLFC10-155167-M5					
		20	M5×0.8	VPLFC10-205167-M5					
		25	M5×0.8	VPLFC10-25167-M5					
	ø15	2	M5×0.8	VPLFC15-25167-M5		M5			
		5	M5×0.8	VPLFC15-55167-M5					
		10	M5×0.8	VPLFC15-105167-M5					
		15	M5×0.8	VPLFC15-155167-M5					
		20	M5×0.8	VPLFC15-205167-M5					
		25	M5×0.8	VPLFC15-25167-M5					
	ø20	5	M6×1	VPLFC20-55167-M6		M6			
		10	M6×1	VPLFC20-105167-M6					
		15	M6×1	VPLFC20-155167-M6					
		20	M6×1	VPLFC20-205167-M6					
ø25		5	M6×1	VPLFC25-55167-M6	M6				
		10	M6×1	VPLFC25-105167-M6					
	15	M6×1	VPLFC25-155167-M6						
	20	M6×1	VPLFC25-205167-M6						
	ø30	5	M6×1	VPLFC30-55167-M6		M6			
		10	M6×1	VPLFC30-105167-M6					
15		M6×1	VPLFC30-155167-M6						
20		M6×1	VPLFC30-205167-M6						
Holder type		Pad dia. (mm)	Tube O.D. (mm)	Model code	13 -S3 -S3 spec.		Connec- tion config. code		
Spring type, Side port, Push-in fitting, Mini VPMD  Stroke 4mm		ø10	ø3	VPMD10-45167-J-SJ	—		M4		
	ø4		VPMD10-45167-J-1/16	○					
	ø6		VPMD10-45167-J-6/16	○					
	ø15	ø3	VPMD10-45167-J-SJ	—	M5				
		ø4	VPMD15-45167-J-1/16	○					
		ø6	VPMD15-45167-J-6/16	○					
	ø20	ø3	VPMD20-45167-J-SJ	—		M6			
		ø4	VPMD20-45167-J-1/16	○					
		ø6	VPMD20-45167-J-6/16	○					
	ø25	ø3	VPMD25-45167-J-SJ	—				M6	
		ø4	VPMD25-45167-J-1/16	○					
		ø6	VPMD25-45167-J-6/16	○					
	ø30	ø3	VPMD30-45167-J-SJ	—					M6
		ø4	VPMD30-45167-J-1/16	○					
		ø6	VPMD30-45167-J-6/16	○					
	Holder type	Pad dia. (mm)	Male thread size	Model code					
Spring type, Side port, Female thread, Mini VPMD  Stroke 4mm	ø10	M5×0.8	VPMD10-45167-J-M51/3	○			M4		
	ø15	M5×0.8	VPMD15-45167-J-M51/3	○					
	ø20	M5×0.8	VPMD20-45167-J-M51/3	○					
	ø25	M5×0.8	VPMD25-45167-J-M51/3	○	M6				
	ø30	M5×0.8	VPMD30-45167-J-M51/3	○					

Vacuum Pad Flat Type/Flat Large Suction Flow Type

RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad dia. (mm)	Stroke (mm)	Tube O.D. (mm)	Model code	⑬ -S3 spec.	Connection config. code	Pad dia. (mm)	Stroke (mm)	Tube O.D. (mm)	Model code	⑬ -S3 spec.	Connection config. code
Spring type, Side port, Push-in fitting, Standard VPD	ø10	6	ø3	VPD10-6⑤⑥⑦-③④⑤	—	M4	ø10	6	ø1/8	VPD10-6⑤⑥⑦-④⑤⑥	—	M4
			ø4	VPD10-6⑤⑥⑦-④⑤⑥	○				ø5/32	VPD10-6⑤⑥⑦-④⑤⑥	○	
			ø6	VPD10-6⑤⑥⑦-④⑤⑥	○				ø1/4	VPD10-6⑤⑥⑦-④⑤⑥	—	
		10	ø3	VPD10-10⑤⑥⑦-③④⑤	—			10	ø1/8	VPD10-10⑤⑥⑦-④⑤⑥	—	
			ø4	VPD10-10⑤⑥⑦-④⑤⑥	—				ø5/32	VPD10-10⑤⑥⑦-④⑤⑥	—	
			ø6	VPD10-10⑤⑥⑦-④⑤⑥	—				ø1/4	VPD10-10⑤⑥⑦-④⑤⑥	—	
		15	ø3	VPD10-15⑤⑥⑦-③④⑤	—			15	ø1/8	VPD10-15⑤⑥⑦-④⑤⑥	—	
			ø4	VPD10-15⑤⑥⑦-④⑤⑥	—				ø5/32	VPD10-15⑤⑥⑦-④⑤⑥	—	
			ø6	VPD10-15⑤⑥⑦-④⑤⑥	—				ø1/4	VPD10-15⑤⑥⑦-④⑤⑥	—	
		20	ø3	VPD10-20⑤⑥⑦-③④⑤	—			20	ø1/8	VPD10-20⑤⑥⑦-④⑤⑥	—	
			ø4	VPD10-20⑤⑥⑦-④⑤⑥	—				ø5/32	VPD10-20⑤⑥⑦-④⑤⑥	—	
			ø6	VPD10-20⑤⑥⑦-④⑤⑥	—				ø1/4	VPD10-20⑤⑥⑦-④⑤⑥	—	
	ø15	6	ø3	VPD15-6⑤⑥⑦-③④⑤	—	M4	ø15	6	ø1/8	VPD15-6⑤⑥⑦-④⑤⑥	—	M4
			ø4	VPD15-6⑤⑥⑦-④⑤⑥	○				ø5/32	VPD15-6⑤⑥⑦-④⑤⑥	○	
			ø6	VPD15-6⑤⑥⑦-④⑤⑥	○				ø1/4	VPD15-6⑤⑥⑦-④⑤⑥	—	
		10	ø3	VPD15-10⑤⑥⑦-③④⑤	—			10	ø1/8	VPD15-10⑤⑥⑦-④⑤⑥	—	
			ø4	VPD15-10⑤⑥⑦-④⑤⑥	—				ø5/32	VPD15-10⑤⑥⑦-④⑤⑥	—	
			ø6	VPD15-10⑤⑥⑦-④⑤⑥	—				ø1/4	VPD15-10⑤⑥⑦-④⑤⑥	—	
		15	ø3	VPD15-15⑤⑥⑦-③④⑤	—			15	ø1/8	VPD15-15⑤⑥⑦-④⑤⑥	—	
			ø4	VPD15-15⑤⑥⑦-④⑤⑥	—				ø5/32	VPD15-15⑤⑥⑦-④⑤⑥	—	
			ø6	VPD15-15⑤⑥⑦-④⑤⑥	—				ø1/4	VPD15-15⑤⑥⑦-④⑤⑥	—	
		20	ø3	VPD15-20⑤⑥⑦-③④⑤	—			20	ø1/8	VPD15-20⑤⑥⑦-④⑤⑥	—	
			ø4	VPD15-20⑤⑥⑦-④⑤⑥	—				ø5/32	VPD15-20⑤⑥⑦-④⑤⑥	—	
			ø6	VPD15-20⑤⑥⑦-④⑤⑥	—				ø1/4	VPD15-20⑤⑥⑦-④⑤⑥	—	
	ø20	6	ø3	VPD20-6⑤⑥⑦-③④⑤	—	M4	ø20	6	ø1/8	VPD20-6⑤⑥⑦-④⑤⑥	—	M4
			ø4	VPD20-6⑤⑥⑦-④⑤⑥	○				ø5/32	VPD20-6⑤⑥⑦-④⑤⑥	○	
			ø6	VPD20-6⑤⑥⑦-④⑤⑥	○				ø1/4	VPD20-6⑤⑥⑦-④⑤⑥	—	
		10	ø3	VPD20-10⑤⑥⑦-③④⑤	—			10	ø1/8	VPD20-10⑤⑥⑦-④⑤⑥	—	
			ø4	VPD20-10⑤⑥⑦-④⑤⑥	—				ø5/32	VPD20-10⑤⑥⑦-④⑤⑥	—	
			ø6	VPD20-10⑤⑥⑦-④⑤⑥	—				ø1/4	VPD20-10⑤⑥⑦-④⑤⑥	—	
		15	ø3	VPD20-15⑤⑥⑦-③④⑤	—			15	ø1/8	VPD20-15⑤⑥⑦-④⑤⑥	—	
			ø4	VPD20-15⑤⑥⑦-④⑤⑥	—				ø5/32	VPD20-15⑤⑥⑦-④⑤⑥	—	
			ø6	VPD20-15⑤⑥⑦-④⑤⑥	—				ø1/4	VPD20-15⑤⑥⑦-④⑤⑥	—	
		20	ø3	VPD20-20⑤⑥⑦-③④⑤	—			20	ø1/8	VPD20-20⑤⑥⑦-④⑤⑥	—	
			ø4	VPD20-20⑤⑥⑦-④⑤⑥	—				ø5/32	VPD20-20⑤⑥⑦-④⑤⑥	—	
			ø6	VPD20-20⑤⑥⑦-④⑤⑥	—				ø1/4	VPD20-20⑤⑥⑦-④⑤⑥	—	
	ø25	6	ø3	VPD25-6⑤⑥⑦-③④⑤	—	M6	ø25	6	ø1/8	VPD25-6⑤⑥⑦-④⑤⑥	—	M6
			ø4	VPD25-6⑤⑥⑦-④⑤⑥	○				ø5/32	VPD25-6⑤⑥⑦-④⑤⑥	○	
			ø6	VPD25-6⑤⑥⑦-④⑤⑥	○				ø1/4	VPD25-6⑤⑥⑦-④⑤⑥	—	
		10	ø3	VPD25-10⑤⑥⑦-③④⑤	—			10	ø1/8	VPD25-10⑤⑥⑦-④⑤⑥	—	
			ø4	VPD25-10⑤⑥⑦-④⑤⑥	—				ø5/32	VPD25-10⑤⑥⑦-④⑤⑥	—	
			ø6	VPD25-10⑤⑥⑦-④⑤⑥	—				ø1/4	VPD25-10⑤⑥⑦-④⑤⑥	—	
		15	ø3	VPD25-15⑤⑥⑦-③④⑤	—			15	ø1/8	VPD25-15⑤⑥⑦-④⑤⑥	—	
			ø4	VPD25-15⑤⑥⑦-④⑤⑥	—				ø5/32	VPD25-15⑤⑥⑦-④⑤⑥	—	
			ø6	VPD25-15⑤⑥⑦-④⑤⑥	—				ø1/4	VPD25-15⑤⑥⑦-④⑤⑥	—	
		20	ø3	VPD25-20⑤⑥⑦-③④⑤	—			20	ø1/8	VPD25-20⑤⑥⑦-④⑤⑥	—	
			ø4	VPD25-20⑤⑥⑦-④⑤⑥	—				ø5/32	VPD25-20⑤⑥⑦-④⑤⑥	—	
			ø6	VPD25-20⑤⑥⑦-④⑤⑥	—				ø1/4	VPD25-20⑤⑥⑦-④⑤⑥	—	
	ø30	6	ø3	VPD30-6⑤⑥⑦-③④⑤	—	M6	ø30	6	ø1/8	VPD30-6⑤⑥⑦-④⑤⑥	—	M6
			ø4	VPD30-6⑤⑥⑦-④⑤⑥	○				ø5/32	VPD30-6⑤⑥⑦-④⑤⑥	○	
			ø6	VPD30-6⑤⑥⑦-④⑤⑥	○				ø1/4	VPD30-6⑤⑥⑦-④⑤⑥	—	
		10	ø3	VPD30-10⑤⑥⑦-③④⑤	—			10	ø1/8	VPD30-10⑤⑥⑦-④⑤⑥	—	
			ø4	VPD30-10⑤⑥⑦-④⑤⑥	—				ø5/32	VPD30-10⑤⑥⑦-④⑤⑥	—	
			ø6	VPD30-10⑤⑥⑦-④⑤⑥	—				ø1/4	VPD30-10⑤⑥⑦-④⑤⑥	—	
		15	ø3	VPD30-15⑤⑥⑦-③④⑤	—			15	ø1/8	VPD30-15⑤⑥⑦-④⑤⑥	—	
			ø4	VPD30-15⑤⑥⑦-④⑤⑥	—				ø5/32	VPD30-15⑤⑥⑦-④⑤⑥	—	
			ø6	VPD30-15⑤⑥⑦-④⑤⑥	—				ø1/4	VPD30-15⑤⑥⑦-④⑤⑥	—	
		20	ø3	VPD30-20⑤⑥⑦-③④⑤	—			20	ø1/8	VPD30-20⑤⑥⑦-④⑤⑥	—	
			ø4	VPD30-20⑤⑥⑦-④⑤⑥	—				ø5/32	VPD30-20⑤⑥⑦-④⑤⑥	—	
			ø6	VPD30-20⑤⑥⑦-④⑤⑥	—				ø1/4	VPD30-20⑤⑥⑦-④⑤⑥	—	

RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad dia. (mm)	Stroke (mm)	Male thread size	Model code	⑬ -S3 spec.	Connection config. code
Spring type, Side port, Female thread, Standard VPD	ø10	6	M6×1	VPD10-6⑤⑥⑦-④⑤⑥	○	M4
				VPD10-10⑤⑥⑦-④⑤⑥	—	
				VPD10-15⑤⑥⑦-④⑤⑥	—	
				VPD10-20⑤⑥⑦-④⑤⑥	—	
		10	M6×1	VPD10-10⑤⑥⑦-④⑤⑥	—	
				VPD10-15⑤⑥⑦-④⑤⑥	—	
	ø15	6	M6×1	VPD15-6⑤⑥⑦-④⑤⑥	○	M4
				VPD15-10⑤⑥⑦-④⑤⑥	—	
				VPD15-15⑤⑥⑦-④⑤⑥	—	
				VPD15-20⑤⑥⑦-④⑤⑥	—	
		10	M6×1	VPD15-10⑤⑥⑦-④⑤⑥	—	
				VPD15-15⑤⑥⑦-④⑤⑥	—	
	ø20	6	M6×1	VPD20-6⑤⑥⑦-④⑤⑥	○	M6
				VPD20-10⑤⑥⑦-④⑤⑥	—	
				VPD20-15⑤⑥⑦-④⑤⑥	—	
				VPD20-20⑤⑥⑦-④⑤⑥	—	
		10	M6×1	VPD20-10⑤⑥⑦-④⑤⑥	—	
				VPD20-15⑤⑥⑦-④⑤⑥	—	
	ø25	6	M6×1	VPD25-6⑤⑥⑦-④⑤⑥	○	M6
				VPD25-10⑤⑥⑦-④⑤⑥	—	
				VPD25-15⑤⑥⑦-④⑤⑥	—	
				VPD25-20⑤⑥⑦-④⑤⑥	—	
		10	M6×1	VPD25-10⑤⑥⑦-④⑤⑥	—	
				VPD25-15⑤⑥⑦-④⑤⑥	—	
	ø30	6	M6×1	VPD30-6⑤⑥⑦-④⑤⑥	○	M6
				VPD30-10⑤⑥⑦-④⑤⑥	—	
				VPD30-15⑤⑥⑦-④⑤⑥	—	
				VPD30-20⑤⑥⑦-④⑤⑥	—	
		10	M6×1	VPD30-10⑤⑥⑦-④⑤⑥	—	
				VPD30-15⑤⑥⑦-④⑤⑥	—	



Notes

- *1 Barb fitting type holders are also selectable. Contact us for the details.
- *2 Large Suction Flow type is not available on Urethane rubber (U).



Vacuum Pad Flat Type/Flat Large Suction Flow Type

RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad dia. (mm)	Stroke (mm)	Tube O.D. (mm)	Model code	Connection config. code	Pad dia. (mm)	Stroke (mm)	Tube O.D. (inch)	Model code	Connection config. code
Spring type, Side port, Push-in fitting, No cover VPOD 	ø10	20	ø3	VPOD10-2051617-3J	M4	ø10	20	ø1/8	VPOD10-2051617-1/4J	M4
			ø4	VPOD10-2051617-4J				ø5/32	VPOD10-2051617-1/2J	
			ø6	VPOD10-2051617-6J				ø1/4	VPOD10-2051617-1/2J	
		30	ø3	VPOD10-3051617-3J			30	ø1/8	VPOD10-3051617-1/4J	
			ø4	VPOD10-3051617-4J				ø5/32	VPOD10-3051617-1/2J	
			ø6	VPOD10-3051617-6J				ø1/4	VPOD10-3051617-1/2J	
		40	ø3	VPOD10-4051617-3J			40	ø1/8	VPOD10-4051617-1/4J	
			ø4	VPOD10-4051617-4J				ø5/32	VPOD10-4051617-1/2J	
			ø6	VPOD10-4051617-6J				ø1/4	VPOD10-4051617-1/2J	
		50	ø3	VPOD10-5051617-3J			50	ø1/8	VPOD10-5051617-1/4J	
			ø4	VPOD10-5051617-4J				ø5/32	VPOD10-5051617-1/2J	
			ø6	VPOD10-5051617-6J				ø1/4	VPOD10-5051617-1/2J	
	ø15	20	ø3	VPOD15-2051617-3J	M4	ø15	20	ø1/8	VPOD15-2051617-1/4J	M4
			ø4	VPOD15-2051617-4J				ø5/32	VPOD15-2051617-1/2J	
			ø6	VPOD15-2051617-6J				ø1/4	VPOD15-2051617-1/2J	
		30	ø3	VPOD15-3051617-3J			30	ø1/8	VPOD15-3051617-1/4J	
			ø4	VPOD15-3051617-4J				ø5/32	VPOD15-3051617-1/2J	
			ø6	VPOD15-3051617-6J				ø1/4	VPOD15-3051617-1/2J	
		40	ø3	VPOD15-4051617-3J			40	ø1/8	VPOD15-4051617-1/4J	
			ø4	VPOD15-4051617-4J				ø5/32	VPOD15-4051617-1/2J	
			ø6	VPOD15-4051617-6J				ø1/4	VPOD15-4051617-1/2J	
		50	ø3	VPOD15-5051617-3J			50	ø1/8	VPOD15-5051617-1/4J	
			ø4	VPOD15-5051617-4J				ø5/32	VPOD15-5051617-1/2J	
			ø6	VPOD15-5051617-6J				ø1/4	VPOD15-5051617-1/2J	
	ø20	20	ø3	VPOD20-2051617-3J	M4	ø20	20	ø1/8	VPOD20-2051617-1/4J	M4
			ø4	VPOD20-2051617-4J				ø5/32	VPOD20-2051617-1/2J	
			ø6	VPOD20-2051617-6J				ø1/4	VPOD20-2051617-1/2J	
		30	ø3	VPOD20-3051617-3J			30	ø1/8	VPOD20-3051617-1/4J	
			ø4	VPOD20-3051617-4J				ø5/32	VPOD20-3051617-1/2J	
			ø6	VPOD20-3051617-6J				ø1/4	VPOD20-3051617-1/2J	
		40	ø3	VPOD20-4051617-3J			40	ø1/8	VPOD20-4051617-1/4J	
			ø4	VPOD20-4051617-4J				ø5/32	VPOD20-4051617-1/2J	
			ø6	VPOD20-4051617-6J				ø1/4	VPOD20-4051617-1/2J	
		50	ø3	VPOD20-5051617-3J			50	ø1/8	VPOD20-5051617-1/4J	
			ø4	VPOD20-5051617-4J				ø5/32	VPOD20-5051617-1/2J	
			ø6	VPOD20-5051617-6J				ø1/4	VPOD20-5051617-1/2J	
	ø25	20	ø3	VPOD25-2051617-3J	M6	ø25	20	ø1/8	VPOD25-2051617-1/4J	M6
			ø4	VPOD25-2051617-4J				ø5/32	VPOD25-2051617-1/2J	
			ø6	VPOD25-2051617-6J				ø1/4	VPOD25-2051617-1/2J	
		30	ø3	VPOD25-3051617-3J			30	ø1/8	VPOD25-3051617-1/4J	
			ø4	VPOD25-3051617-4J				ø5/32	VPOD25-3051617-1/2J	
			ø6	VPOD25-3051617-6J				ø1/4	VPOD25-3051617-1/2J	
		40	ø3	VPOD25-4051617-3J			40	ø1/8	VPOD25-4051617-1/4J	
			ø4	VPOD25-4051617-4J				ø5/32	VPOD25-4051617-1/2J	
			ø6	VPOD25-4051617-6J				ø1/4	VPOD25-4051617-1/2J	
		50	ø3	VPOD25-5051617-3J			50	ø1/8	VPOD25-5051617-1/4J	
			ø4	VPOD25-5051617-4J				ø5/32	VPOD25-5051617-1/2J	
			ø6	VPOD25-5051617-6J				ø1/4	VPOD25-5051617-1/2J	
	ø30	20	ø3	VPOD30-2051617-3J	M6	ø30	20	ø1/8	VPOD30-2051617-1/4J	M6
			ø4	VPOD30-2051617-4J				ø5/32	VPOD30-2051617-1/2J	
			ø6	VPOD30-2051617-6J				ø1/4	VPOD30-2051617-1/2J	
		30	ø3	VPOD30-3051617-3J			30	ø1/8	VPOD30-3051617-1/4J	
			ø4	VPOD30-3051617-4J				ø5/32	VPOD30-3051617-1/2J	
			ø6	VPOD30-3051617-6J				ø1/4	VPOD30-3051617-1/2J	
		40	ø3	VPOD30-4051617-3J			40	ø1/8	VPOD30-4051617-1/4J	
			ø4	VPOD30-4051617-4J				ø5/32	VPOD30-4051617-1/2J	
			ø6	VPOD30-4051617-6J				ø1/4	VPOD30-4051617-1/2J	
		50	ø3	VPOD30-5051617-3J			50	ø1/8	VPOD30-5051617-1/4J	
			ø4	VPOD30-5051617-4J				ø5/32	VPOD30-5051617-1/2J	
			ø6	VPOD30-5051617-6J				ø1/4	VPOD30-5051617-1/2J	

RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad dia. (mm)	Stroke (mm)	Male thread size	Model code	Connection config. code
Spring type, Side port, Female thread, No cover VPOD 	ø10	20	M6×1	VPOD10-2051617-M6	M4
		30		VPOD10-3051617-M6	
		40		VPOD10-4051617-M6	
		50		VPOD10-5051617-M6	
	ø15	20	M6×1	VPOD15-2051617-M6	M4
		30		VPOD15-3051617-M6	
		40		VPOD15-4051617-M6	
		50		VPOD15-5051617-M6	
	ø20	20	M6×1	VPOD20-2051617-M6	M6
		30		VPOD20-3051617-M6	
		40		VPOD20-4051617-M6	
		50		VPOD20-5051617-M6	
	ø25	20	M6×1	VPOD25-2051617-M6	M6
		30		VPOD25-3051617-M6	
		40		VPOD25-4051617-M6	
		50		VPOD25-5051617-M6	
	ø30	20	M6×1	VPOD30-2051617-M6	M6
		30		VPOD30-3051617-M6	
		40		VPOD30-4051617-M6	
		50		VPOD30-5051617-M6	



Notes

- *1 Barb fitting type holders are also selectable. Contact us for the details.
- *2 Large Suction Flow type is not available on Urethane rubber (U).



CAD data is available
at PISCO website.



Packaging specifications
1 pc. /bag



Options

□ : Surface treatment (DLC. coating, Reformed surface, and Fluoro-coating)

Optional items ⇒ P.640	Pad surface treatment for suction mark-free	Fall Prevention Valve	Swivel Joint for vacuum pad	Filter
				



Vacuum Pad Flat Type/Flat Large Suction Flow Type

RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad dia. (mm)	Stroke (mm)	Tube O.D. (mm)	Model code	Connection config. code	Pad dia. (mm)	Stroke (mm)	Tube O.D. (inch)	Model code	Connection config. code
Spring type, Side port, Push-in fitting, Low dust emission VPLFD 	ø10	5	ø3	VPLFD10-5 ^① ⑤①⑦⑦-3J	M4	ø10	5	ø1/8	VPLFD10-5 ^① ⑤①⑦⑦-1J	M4
			ø4	VPLFD10-5 ^① ⑤①⑦⑦-4J				ø5/32	VPLFD10-5 ^① ⑤①⑦⑦-1J	
		10	ø3	VPLFD10-10 ^① ⑤①⑦⑦-3J			10	ø1/8	VPLFD10-10 ^① ⑤①⑦⑦-1J	
			ø4	VPLFD10-10 ^① ⑤①⑦⑦-4J				ø5/32	VPLFD10-10 ^① ⑤①⑦⑦-1J	
		15	ø3	VPLFD10-15 ^① ⑤①⑦⑦-3J			15	ø1/8	VPLFD10-15 ^① ⑤①⑦⑦-1J	
			ø4	VPLFD10-15 ^① ⑤①⑦⑦-4J				ø5/32	VPLFD10-15 ^① ⑤①⑦⑦-1J	
		20	ø3	VPLFD10-20 ^① ⑤①⑦⑦-3J			20	ø1/8	VPLFD10-20 ^① ⑤①⑦⑦-1J	
			ø4	VPLFD10-20 ^① ⑤①⑦⑦-4J				ø5/32	VPLFD10-20 ^① ⑤①⑦⑦-1J	
	ø15	5	ø3	VPLFD15-5 ^① ⑤①⑦⑦-3J	M4	ø15	5	ø1/8	VPLFD15-5 ^① ⑤①⑦⑦-1J	M4
			ø4	VPLFD15-5 ^① ⑤①⑦⑦-4J				ø5/32	VPLFD15-5 ^① ⑤①⑦⑦-1J	
		10	ø3	VPLFD15-10 ^① ⑤①⑦⑦-3J			10	ø1/8	VPLFD15-10 ^① ⑤①⑦⑦-1J	
			ø4	VPLFD15-10 ^① ⑤①⑦⑦-4J				ø5/32	VPLFD15-10 ^① ⑤①⑦⑦-1J	
		15	ø3	VPLFD15-15 ^① ⑤①⑦⑦-3J			15	ø1/8	VPLFD15-15 ^① ⑤①⑦⑦-1J	
			ø4	VPLFD15-15 ^① ⑤①⑦⑦-4J				ø5/32	VPLFD15-15 ^① ⑤①⑦⑦-1J	
		20	ø3	VPLFD15-20 ^① ⑤①⑦⑦-3J			20	ø1/8	VPLFD15-20 ^① ⑤①⑦⑦-1J	
			ø4	VPLFD15-20 ^① ⑤①⑦⑦-4J				ø5/32	VPLFD15-20 ^① ⑤①⑦⑦-1J	
	ø20	5	ø3	VPLFD20-5 ^① ⑤①⑦⑦-3J	M4	ø20	5	ø1/8	VPLFD20-5 ^① ⑤①⑦⑦-1J	M4
			ø4	VPLFD20-5 ^① ⑤①⑦⑦-4J				ø5/32	VPLFD20-5 ^① ⑤①⑦⑦-1J	
		10	ø6	VPLFD20-10 ^① ⑤①⑦⑦-6J			10	ø1/4	VPLFD20-10 ^① ⑤①⑦⑦-1J	
			ø3	VPLFD20-10 ^① ⑤①⑦⑦-3J				ø1/8	VPLFD20-10 ^① ⑤①⑦⑦-1J	
		15	ø4	VPLFD20-15 ^① ⑤①⑦⑦-4J			15	ø5/32	VPLFD20-15 ^① ⑤①⑦⑦-1J	
			ø6	VPLFD20-15 ^① ⑤①⑦⑦-6J				ø1/4	VPLFD20-15 ^① ⑤①⑦⑦-1J	
		20	ø3	VPLFD20-20 ^① ⑤①⑦⑦-3J			20	ø1/8	VPLFD20-20 ^① ⑤①⑦⑦-1J	
			ø4	VPLFD20-20 ^① ⑤①⑦⑦-4J				ø5/32	VPLFD20-20 ^① ⑤①⑦⑦-1J	
			ø6	VPLFD20-20 ^① ⑤①⑦⑦-6J				ø1/4	VPLFD20-20 ^① ⑤①⑦⑦-1J	
			ø3	VPLFD25-5 ^① ⑤①⑦⑦-3J			M6	ø1/8	VPLFD25-5 ^① ⑤①⑦⑦-1J	
		5	ø4	VPLFD25-5 ^① ⑤①⑦⑦-4J			5	ø5/32	VPLFD25-5 ^① ⑤①⑦⑦-1J	
			ø6	VPLFD25-5 ^① ⑤①⑦⑦-6J				ø1/4	VPLFD25-5 ^① ⑤①⑦⑦-1J	
		10	ø3	VPLFD25-10 ^① ⑤①⑦⑦-3J			10	ø1/8	VPLFD25-10 ^① ⑤①⑦⑦-1J	
			ø4	VPLFD25-10 ^① ⑤①⑦⑦-4J				ø5/32	VPLFD25-10 ^① ⑤①⑦⑦-1J	
			ø6	VPLFD25-10 ^① ⑤①⑦⑦-6J				ø1/4	VPLFD25-10 ^① ⑤①⑦⑦-1J	
		15	ø3	VPLFD25-15 ^① ⑤①⑦⑦-3J			15	ø1/8	VPLFD25-15 ^① ⑤①⑦⑦-1J	
			ø4	VPLFD25-15 ^① ⑤①⑦⑦-4J				ø5/32	VPLFD25-15 ^① ⑤①⑦⑦-1J	
		20	ø6	VPLFD25-15 ^① ⑤①⑦⑦-6J			20	ø1/4	VPLFD25-15 ^① ⑤①⑦⑦-1J	
			ø3	VPLFD25-20 ^① ⑤①⑦⑦-3J			M6	ø1/8	VPLFD30-5 ^① ⑤①⑦⑦-1J	
		5	ø4	VPLFD30-5 ^① ⑤①⑦⑦-4J			5	ø5/32	VPLFD30-5 ^① ⑤①⑦⑦-1J	
			ø6	VPLFD30-5 ^① ⑤①⑦⑦-6J				ø1/4	VPLFD30-5 ^① ⑤①⑦⑦-1J	
		10	ø3	VPLFD30-10 ^① ⑤①⑦⑦-3J			10	ø1/8	VPLFD30-10 ^① ⑤①⑦⑦-1J	
			ø4	VPLFD30-10 ^① ⑤①⑦⑦-4J				ø5/32	VPLFD30-10 ^① ⑤①⑦⑦-1J	
			ø6	VPLFD30-10 ^① ⑤①⑦⑦-6J				ø1/4	VPLFD30-10 ^① ⑤①⑦⑦-1J	
		15	ø3	VPLFD30-15 ^① ⑤①⑦⑦-3J			15	ø1/8	VPLFD30-15 ^① ⑤①⑦⑦-1J	
			ø4	VPLFD30-15 ^① ⑤①⑦⑦-4J				ø5/32	VPLFD30-15 ^① ⑤①⑦⑦-1J	
		20	ø6	VPLFD30-15 ^① ⑤①⑦⑦-6J			20	ø1/4	VPLFD30-15 ^① ⑤①⑦⑦-1J	
			ø3	VPLFD30-20 ^① ⑤①⑦⑦-3J				ø1/8	VPLFD30-20 ^① ⑤①⑦⑦-1J	
			ø4	VPLFD30-20 ^① ⑤①⑦⑦-4J				ø5/32	VPLFD30-20 ^① ⑤①⑦⑦-1J	
			ø6	VPLFD30-20 ^① ⑤①⑦⑦-6J				ø1/4	VPLFD30-20 ^① ⑤①⑦⑦-1J	

- Notes**
- *1 Barb fitting type holders are also selectable. Contact us for the details.
 - *2 Large Suction Flow type is not available on Urethane rubber (U).

Packaging specifications
1 pc. /bag

Options
⑦ : Surface treatment (DLC. coating, Reformed surface, and Fluoro-coating)

Optional items
⇒ P.640

Pad surface treatment for suction mark-free

Fall Prevention Valve

Swivel Joint for vacuum pad

Filter

RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad dia. (mm)	Stroke (mm)	Male thread size	Model code	Connec- tion config. code	
Spring type, Side port, Female thread, Low dust emission VPLFD 	ø10	5	M5×0.8	VPLFD10-5[5][6][7][7]-M5	M4	
		10	M5×0.8	VPLFD10-10[5][6][7][7]-M5		
		15	M5×0.8	VPLFD10-15[5][6][7][7]-M5		
	ø15	5	M5×0.8	VPLFD15-5[5][6][7][7]-M5	M4	
		10	M5×0.8	VPLFD15-10[5][6][7][7]-M5		
		15	M5×0.8	VPLFD15-15[5][6][7][7]-M5		
	ø20	5	M6×1	VPLFD20-5[5][6][7][7]-M6	M6	
		10	M6×1	VPLFD20-10[5][6][7][7]-M6		
		15	M6×1	VPLFD20-15[5][6][7][7]-M6		
	ø25	5	M6×1	VPLFD25-5[5][6][7][7]-M6	M6	
		10	M6×1	VPLFD25-10[5][6][7][7]-M6		
		15	M6×1	VPLFD25-15[5][6][7][7]-M6		
	ø30	5	M6×1	VPLFD30-5[5][6][7][7]-M6	M6	
		10	M6×1	VPLFD30-10[5][6][7][7]-M6		
		15	M6×1	VPLFD30-15[5][6][7][7]-M6		
	Holder type	VPE holders are available with metric male/female threads, taper pipe threads, parallel pipe thread and NPT threads. See Pad holder only (page 399) for variations. * Pads with the same configuration code as the holder can be connected. [See Pad rubber only (page 382)]. Applicable Screws Metric male thread : M8, M10, M12, M14 Metric female thread : M5, M8 Taper pipe thread : R1/8, R1/4, R3/8, R1/2 Parallel pipe thread : G1/8, G1/4, G3/8, G1/2 NPT thread : NPT1/8, NPT1/4, NPT3/8, NPT1/2				
	Fixed type, Direct mount, Standard VPE 					
Holder type	Pad dia. (mm)	Female thread size	Model code	13 -S3 -S3 spec.	Connec- tion config. code	
Spring type, Direct mount VPF 	ø10	M14×1	VPF10[5][6][7][9][13]	○	M4	
	ø15	M14×1	VPF15[5][6][7][9][13]	○		
	ø20	M14×1	VPF20[5][6][7][9][13]	○		
	ø25	M14×1	VPF25[5][6][7][9][13]	○	M6	
	ø30	M14×1	VPF30[5][6][7][9][13]	○		
Stroke 5.8mm						

CAD CAD data is available at PISCO website.

Packaging specifications
1 pc. /bag

Options

⑦ : Surface treatment (DLC. coating, Reformed surface, and Fluoro-coating)

⑩ : -DC ⇒ Holder with dust catcher

⑩ : -S3 ⇒ -S3 spec. (○ in the lists: Available)

*1 For "-S3 spec.", the release ring color is dark blue, and the gasket material is FKM+SUS316.

*2 For inch size push-in fitting, the release ring color is white even for "-S3 spec."

Optional items
⇒ P.640

Pad surface treatment for suction mark-free

Dust Catcher (VPF)

Fall Prevention Valve

Swivel Joint for vacuum pad

Filter

Vacuum Pad Flat Type/Flat Large Suction Flow Type —

Optional items (○: Available)

7 Pad surface treatment (Suction mark-free)

Pad dia. (mm)	7 Surface treatment code			Connection config. code
	-DL DLC coating	-ER Reformed surface	-FG Fluoro- coating	
ø10	○	○	○	M4
ø15	○	○	○	
ø20	○	○	○	M6
ø25	○	○	○	
ø30	○	○	○	
Material	S, F, SE	N, NE	S, SE	

Characteristics of surface treatment ▶ P.370

9 Dust Catcher : -DC

Optional	Connection config. code	-S3 spec.
Dust Catcher (-DC)	M4	○
	M6	○
Holder type		
VPC	VPD	VPF

Characteristics of Dust Catcher ▶ P.371

10 Fall Prevention Valve : -ECV

Optional	Connection config. code	Model code
Fall Prevention Valve (-ECV)	M4	ECVM4-FM4
	M6	ECVM6-FM6

Characteristics of Fall Prevention Valve ▶ P.722

11 Swivel Joint for vacuum pad : -FH, -FHH, -CFH

Optional	Swivel angle	Connection config. code	Model code
Ball Swivel Joint (-FH)(-FHH)	30° (-FH)	M4	FH10
		M6	FH20
	15° (-FHH)	M4	FH10-15
		M6	FH20-15

Characteristics of Ball Swivel Joint ▶ P.724

Characteristics of Flexible Swing Joint ▶ P.725

12 Filter : -F15, -F30

Optional	Filter area	Connection config. code	Model code
Pad Direct Mounting Filter (-F15)(-F30)	1.7 c㎡ (-F15)	M4	VFF15-M4
		M6	VFF15-M6
	7 c㎡ (-F30)	M6	VFF30-M6

Characteristics of Filter ▶ P.726

See the page 622 for the model designation including optional items.

Replacement parts (○: -S3 spec. is available)

Adapter for Flat pad Model code	13 : -S3 -S3 spec.	Applicable pad dia. (mm)	Connection config. code
FVPLF15-M4	○	ø10, ø15	M4
FVPLFH15-M4	○		
FVPLF30-M6	○	ø20 to ø30	M6
FVPLFH30-M6	○		

* Use FVPLFH for Large Suction Flow type.

Gasket for adapter (*) Model code	Applicable adapter	Connection config. code
GAS-M4	FVPLF15-M4, FVPLFH15-M4	M4
GAS-M6 (Fall prevention)	FVPLF30-M6, FVPLFH30-M6	M6
	-S3 spec.	
GAS-M5-SUS	FVPLF15-M4-S3, FVPLFH15-M4-S3	M4
GAS-M6-SUS	FVPLF30-M6-S3, FVPLFH30-M6-S3	M6

* Gasket for adapter is equipped with an Adapter. The model code above is for Gasket alone.

Gasket Model code	Applicable pad dia.(mm)	Connection config. code
VPG10	ø10 to ø30	M4
		M6

Rearrangement parts (○: -S3 spec. is available)

Model code of Adapter for pad connection type conversion	13 : -S3 -S3 spec.	Applicable pad dia. (mm)	Connection config. code Before → After
FVPL-FM4-M6	○	ø10, ø15	M4 → M6



*1. This adapter is used to mount a pad & screw set with M4 configuration code on a pad holder with M6 configuration code.

*2. Gasket for adapter is equipped with an Adapter.


Adapter for Flat pad Model code	13 : -S3 -S3 spec.	Applicable pad dia. (mm)
FVPLF15-M5	○	ø10, ø15
FVPLFH15-M5	○	
FVPLF30-M5	○	ø20 to ø30
FVPLFH30-M5	○	

*1 Use FVPLFH for Large Suction Flow type.

*2. Gasket for adapter is equipped with an Adapter.



1. PISCO's Vacuum pad series consists of the combination of vacuum pads and holders.

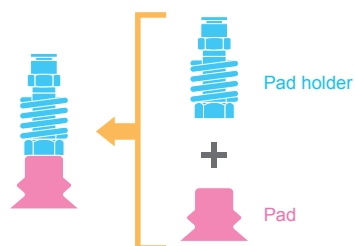


2. Vacuum pad and pad holder have a specific connection type depending on the size and shape.

Pad connection type	Insert type (Direct connection)		Mount type (Direct connection)		Screw type (Connection with screw)	
Connection configuration code	H3		T4 T8			
			T15 T40 (Exclusive to soft type & soft bellows type vacuum pads)		M4 M6 M10 M20	
			PB8 PB15 (Exclusive to Vacuum pad for packaging bag)		G1 G2 G3 G4	
			E10 E20 (Exclusive to Oval type vacuum pad)			

*As shown in above drawings, Vacuum pad and pad holder are connected with a screw or a rim.

3. Any Vacuum pad and pad holder can be connected, as long as their connection configuration codes are same.

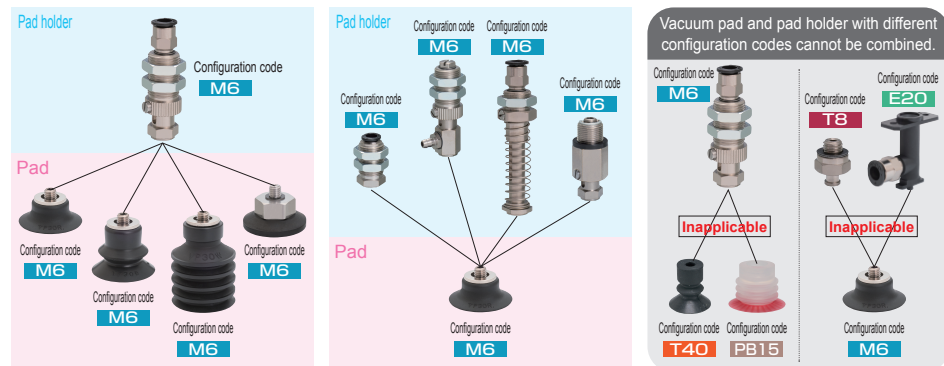

If you have purchased a pad and holder set but want to install a different pad or replace the holder with a different one...
→ Please check the connection configuration code of your pad or pad holder and select the one that matches the configuration code.

4. Please refer to the below chart for the "Connection Configuration Code". *Configuration codes are also listed on the page of model code list for each product.

Connection configuration code list (Holder)

Common holder

		Fixed type				Spring type			
		Mini	Standard	Mini	Slim	Standard	No cover	Low dust emission	
Top port		Code	VPMA	VPA	VPMC	VPSC	VPC	VPOC	VPLFC
Type									
Configuration code			T4 T8 M4 M6 H3 T8 M4 M6 M10 M20 G1 G2 G3 G4	T4 T8 M4 M6	H3 T8	H3 T8 M4 M6 M10 M20 G1 G2 G3 G4	T8 M4 M6	T4 T8 M4 M6	
Side port		Code	VPMB	VPB	VPMD	—	VPD	VPOD	VPLFD
Type						—			
Configuration code			T4 T8 M4 M6 H3 T8 M4 M6 M10 M20 G1 G2 G3 G4	T4 T8 M4 M6	—	H3 T8 M4 M6 M10 M20 G1 G2 G3 G4	T8 M4 M6	T4 T8 M4 M6	
Direct mount		Code	VPME	VPE	—	—	VPF	*Holders with configuration code: G1 to G4 can be connected to VPE holders.	
Type					—	—			Holder with configuration code: G1, G2, G3 and G4
Configuration code			T4 T8	H3 T8 M4 M6 M10 M20 T15 T40	—	—	H3 T8 M4 M6	 VPE holder (Male thread: G1, G2, G3, and G4)	

Common holder (Lightweight/Low profile)

	Top port		Side port	Dual side port
	Code	Code		
Code	VPHC	VPHD	VPHE	VPHEW
Type				
Configuration code	T15 T40 M4 M6	T15 T40 M4 M6	T15 T40 M4 M6	T15 T40 M4 M6

Special holder *Pads of other shapes cannot be installed.

	Top port		Side port
	Code	Code	
Code	VPA	VPB	
Type			
Configuration code	E10 E20	E10 E20	
Code	VPA	VPE	
Type			
Configuration code	PB8 PB15	PB8 PB15	

Connection configuration code list (Pad) (○: Available)

Pad type or application	Standard														Pad type or application
	Small	General	Deep	Bellows	Multi-bellows	Metal detectable	Skidproof	Pat Large suction flow type	Mark-free	Soft	Soft bellows	Sponge	Ultrathin	For packaging bag	
Code	R	R	A	B	W	BE,BD	K	F,FH	Q	L	LB	S	P	PB	Code
0.7	○	○	○	○	○	○	○	○	○	○	○	○	○	○	2x4
1	○	○	○	○	○	○	○	○	○	○	○	○	○	○	3.5x7
1.5	○	○	○	○	○	○	○	○	○	○	○	○	○	○	4x10
2	○	○	○	○	○	○	○	○	○	○	○	○	○	○	5x10
3	○	○	○	○	○	○	○	○	○	○	○	○	○	○	6x10
4	○	○	○	○	○	○	○	○	○	○	○	○	○	○	8x10
6	○	○	○	○	○	○	○	○	○	○	○	○	○	○	4x30
8	○	○	○	○	○	○	○	○	○	○	○	○	○	○	5x30
10	○	○	○	○	○	○	○	○	○	○	○	○	○	○	6x30
15	○	○	○	○	○	○	○	○	○	○	○	○	○	○	8x30
20	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
25	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
30	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
35	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
40	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
50	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
60	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
70	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
80	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
100	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
150	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
200	○	○	○	○	○	○	○	○	○	○	○	○	○	○	

Some combinations are possible by using a conversion screw adapter.

H3, T4 and T8 can be converted to M4 or M6. M4 to M6 conversion is also available. For details, please see "Rearrangement parts" of each pad type.

Model Designation (Example)



(1) Vacuum Pad

(2) Pad size (3) Pad type (6) Connection configuration code *Required for Pad & screw set only. (○: Available)

Pad type or application	Small	General	Deep	Bellows	Multi-bellows	Metal detectable	Skidproof	Flat (Large suction flow type)	Mark-free	Soft	Soft bellows	Sponge	Ultrathin	For packaging bag	Pad type or application
Code	RM	R	A	B	W	BE, BD	K	F, FH	Q	L	LB	S	P	PB	Code
0.7	○	○	○	○	○	○	○	○	○	○	○	○	○	○	2x4
1	○	○	○	○	○	○	○	○	○	○	○	○	○	○	3.5x7
1.5	○	○	○	○	○	○	○	○	○	○	○	○	○	○	4x10
2	○	○	○	○	○	○	○	○	○	○	○	○	○	○	5x10
3	○	○	○	○	○	○	○	○	○	○	○	○	○	○	6x10
4	○	○	○	○	○	○	○	○	○	○	○	○	○	○	4x20
6	○	○	○	○	○	○	○	○	○	○	○	○	○	○	4x30
8	○	○	○	○	○	○	○	○	○	○	○	○	○	○	5x30
10	○	○	○	○	○	○	○	○	○	○	○	○	○	○	6x30
15	○	○	○	○	○	○	○	○	○	○	○	○	○	○	8x20
20	○	○	○	○	○	○	○	○	○	○	○	○	○	○	8x30
25	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
30	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
35	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
40	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
50	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
60	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
70	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
80	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
100	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
150	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
200	○	○	○	○	○	○	○	○	○	○	○	○	○	○	

(4) Pad material (○: Available)

Code	N	S	U	F	SE	NE	G	HN	EP	FS	NH	YS2	YS4	MSF3	MSF5	MSS3	MSS5
Rubber material	Nitrile	Silicone	Urethane	Fluoro	Conductive silicone	Conductive NBR (Low resistance)	Food Sanit. Act compliant NBR	HNBR	EPDM	Fluoro-silicone	Oil proof NBR	Extra soft silicone	Iron powder type	SUS powder type	Metal detectable silicone		
Pad color	Black	Clear white	Dark blue	Gray	Black	Black	Light gray	Black	Black	Red-orange	Black	Pink	Blue	Reddish-brown	Dark-green	Brown	Green
Material code marking ¹⁾	None	None	None	None	SE	NE	None	HN	EP	None	None	None	None	SF	SF	SS	SS
Standard	General	Deep	Small														
Soft	L																
Soft bellows	LB																
Skidproof	K																
Bellows	B																
Multi-bellows	W																
For packaging bag	PB																
Metal Detectable	BE																
Ultrathin	P																
Flat	F																
Flat large suction flow	FH																
Oval	E																

● Mark-free type (Pad type code: Q)

Code	K	M	KE
Resin material	PEEK	POM	Conductive PEEK
Pad color	Beige	White	Black

● Sponge type (Pad type code: S)

Code	S	C
Rubber material	Silicone	Chloroprene
Pad color	Dark-orange	Black

¹⁾ For vacuum pads in black color (SE: Conductive silicone, NE: Conductive NBR (low resistance), HN: HNBR and EP: EPDM) and Vacuum pad Metal Detectable type, the pad material code is marked on the top or the side of the vacuum pad for material identification. (The marking on black vacuum pads has started since Oct. 2023 gradually.)



²⁾ Some materials are not available depending on pad size. Please see the catalog for details.

³⁾ Pad color of pads for Packaging bag. Lip hardness 20° (Pink) Lip hardness 40° (Blue)

⁴⁾ The Conductive Silicone rubber (SE) is a silicon rubber capable of releasing static electricity. (Volume resistance: More than 200 Ω·cm and 10⁵ Ω·cm or less)

⁵⁾ Nitrile rubber (N), Conductive NBR (Low resistance, Volume resistance: 200Ω·cm or less) (NE), Food Sanitation Act-compliant NBR (G), Oil proof NBR (NH) are not suitable for use with ozone environment.

⁶⁾ Extra soft silicone (YS2/YS4), Metal detectable silicone and Silicone for Packaging bag are compliant with Food Sanitation Act and FDA.

⁷⁾ Volume resistance of Conductive PEEK (KE) is 10⁵ to 10⁶ Ω·cm.

(5) Surface treatment (Optional) (○: Available)

Code	No code	-NF	-SF	-DL	-ER	-FG
Surface treatment	None	Fiber surface		DLC. coating	Reformed surface	Fluoro-coating
		Nylon fiber	Silk fiber			
Applicable pad material	—	Silicone (S) Fluoro (F)	Silicone (S) Fluoro (F)	Silicone (S) Fluoro (F) Conductive silicone (SE)	Nitrile (N) Conductive NBR (NE)	Silicone (S) Conductive silicone (SE) Extra soft silicone (YS2, YS4)
Pad type	General	R	—	○	○	○
	Deep	A	—	○	○	○
	Small	RM	—	—	○	○
	Soft	L	—	○	○	○
	Soft bellows	LB	—	○	○	○
	Skidproof	K	—	—	—	—
	Bellows	B	—	○	○	○
	Multi-bellows	W	—	—	○	○
	For packaging bag	PB	—	—	—	○
	Metal Detectable	BE, BD	—	—	—	—
Pad size (mm)	Ultrathin	P	—	—	○	○
	Flat	F	—	—	○	○
	Flat large suction flow	FH	—	—	○	○
	Mark-free	Q	—	—	—	—
	Sponge	S	—	—	—	—
	Oval	E	—	—	○	○

*Some surface treatments are not available depending on pad size.

Please refer to page 370 for the details of each pad surface type and treatment for Suction Mark-free.

(6) Connection configuration code (Required for Pad & screw set only.) Please refer to the Pad size and type list on the 374 page.

Code	No code	-M4	-M6	-M10	-M20	-M5 ^(*)
Connection config. code	—	M4	M6	M10	M20	—
Thread size	Pad rubber only	M4×0.7	M6×1	M10×1.5	M20×2	M5×0.8

*M5 thread is used for mounting on non-PISCO holders. Contact us for the price of screw set.

(7) Mark-free resin attachment material (Bellows type only) (Optional)

Code	No code	-QK	-QM	-QKE
Resin material	—	PEEK	POM	Conductive PEEK (Volume resistance: 10 ⁵ to 10 ⁶ Ω·cm)
	—			

¹⁾ Selectable for Bellows type pad dia. 10 to 30 mm.

²⁾ Resin attachment cannot be installed when selecting surface treatment.

³⁾ Resin attachment cannot be installed when selecting Extra soft silicone for pad material.

(8) -S3 spec. (Required for Pad & screw set only) (Optional)

Code	No code	-S3
Metal material	Standard	No copper-based metallic materials used in flow paths

Vacuum pad / Pad & screw set

Holders with the same "connection configuration code (M4, M6 etc.)" can be connected. For connectable holders, please see the page of Pad holder only (page 384).



Standard series, General type (R) and Deep type (A) Vacuum pad alone

Model code	○: Available as standard item								Connection config. code	
	[4] Pad rubber material									
	N	S	U	F	SE	NE	G	HN		EP
	Nitrile	Silicone	Urethane	Fluoro	Conductive silicone	Conductive NBR (Low resistance)	Food Sant. Act compliant NBR	HNBR		EPDM
VP1R[4]	○	○	○	○	○	○	○	○	○	
VP2R[4]	○	○	○	○	○	○	○	○	○	H3
VP3R[4]	○	○	○	○	○	○	○	○	○	
VP4R[4]	○	○	○	○	○	○	○	○	○	
VP6R[4][5]	○	○	○	○	○	○	○	○	○	TB
VP8R[4][5]	○	○	○	○	○	○	○	○	○	
VP10R[4][5]	○	○	○	○	○	○	○	○	○	
VP15R(A)[4][5]	●	●	●	●	●	●	●	●	●	IM4(3)
VP20R(A)[4][5]	●	●	●	●	●	●	●	●	●	
VP25R(A)[4][5]	●	●	●	●	●	●	●	●	●	
VP30R(A)[4][5]	●	●	●	●	●	●	●	●	●	IM6(3)
VP40R(A)[4][5]	●	●	●	●	●	●	●	●	●	
VP50R(A)[4][5]	●	●	●	●	●	●	●	●	●	
VP60R(A)[4][5]	●	●	●	●	●	●	—	●	●	
VP80R(A)[4][5]	●	●	●	●	○	●	—	●	●	M10(3)
VP100R(A)[4][5]	●	●	●	●	○	●	—	●	●	
VP150R[4][5]	○	○	○	○	○	○	—	○	○	
VP200R[4][5]	○	○	○	○	○	○	—	○	○	M20(3)

Available pad size and material for surface treatment (Standard series, General type & Deep type)

Pad dia. (mm)	[5] Surface treatment code				
	-NF	-SF	-DL	-ER	-FG
	Fiber surface	DLC	Reformed surface	Fluoro-coating	
	Nylon	Silk			
ø6	—	—	○	○	○
ø8	—	—	○	○	○
ø10	—	—	○	○	○
ø15	●	●	●	●	●
ø20	●	●	●	●	●
ø25	●	●	●	●	●
ø30	●	●	●	●	●
ø40	●	●	●	●	●
ø50	●	●	●	●	●
ø60	●	●	—	—	—
ø80	●	●	—	—	—
ø100	—	—	—	—	—
ø150	—	—	—	—	○
ø200	—	—	—	—	○
Material	S, F	S, F, SE	N, NE	S, SE	



Standard series, General type (R) and Deep type (A) Pad & screw set

○: Available as standard item [4] Pad rubber material [8]											Connection config. code M4 M6 M10 M20
Model code	N	S	U	F	SE	NE	G	HN	EP	-S3	
	Nitrile	Silicone	Urethane	Fluoro	Conductive silicone	Conductive NBR (Low resistance)	Food Santit. Act compliant NBR	HNBR	EPDM	-S3 spec.	
VP10R(A)S-M4	○	○	○	○	○	○	○	○	○	○	
VP15R(A)S-M4	●	●	●	●	●	●	●	●	●	○	
VP20R(A)S-M6	●	●	●	●	●	●	●	●	●	○	
VP25R(A)S-M6	●	●	●	●	●	●	●	●	●	○	
VP30R(A)S-M6	●	●	●	●	●	●	●	●	●	○	
VP40R(A)S-M6	●	●	●	●	●	●	●	●	●	○	
VP50R(A)S-M6	●	●	●	●	●	●	●	●	●	○	
VP60R(A)S-M10	●	●	●	●	○	○	—	●	●	*2	
VP80R(A)S-M10	●	●	●	●	○	○	—	●	●	○	
VP100R(A)S-M10	●	●	●	●	○	○	—	●	●	○	
VP150R(A)S-M20	○	○	○	○	○	○	—	○	○	○	
VP200R(A)S-M20	○	○	○	○	○	○	—	○	○	○	


P.406



Standard series, Small type Vacuum pad alone

Model code	○: Available as standard item								Connection config. code	
	[4] Pad rubber material									
	N	S	U	F	SE	NE	G	HN		EP
	Nitrile	Silicone	Urethane	Fluoro	Conductive silicone	Conductive NBR (Low resistance)	Food Sant. Act compliant NBR	HNBR		EPDM
VP0.7RM[4]5	○	○	○	○	○	○	○	○	○	
VP1RM[4]5	○	○	○	○	○	○	○	○	○	
VP1.5RM[4]5	○	○	○	○	○	○	○	○	○	
VP2RM[4]5	○	○	○	○	○	○	○	○	○	
VP3RM[4]5	○	○	○	○	○	○	○	○	○	
VP4RM[4]5	○	○	○	○	○	○	○	○	○	

T4

- Notes
- *1. For ● part in the table above, deep type of standard series is available.
- *2. For Pad & screw set of 60 mm pad dia. (for general type and deep type), the standard spec. is equivalent to "-S3" spec.
- *3. A pad screw is required to mount on the holder. If you do not have a pad screw, please select from the Pad & screw set.
- *4. Configuration code: H3 is not available for surface treatment.

CAD data is available at PISCO website.

Packaging specifications 1 pc./bag

Options

[5]: Surface treatment [8]: -S3 ⇒ -S3 spec.

Holders with the same "connection configuration code (M4, M6 etc.)" can be connected. For connectable holders, please see the page of Pad holder only (page 384).

	Soft series, Pad rubber alone					 P.446
Model code	○: Available as standard item					Connection config. code
	[4] Pad rubber material					
	N	S	FS	SE	NE	
	Nitrile	Silicone	Fluoro silicone	Conductive silicone	Conductive NBR (Low resistance)	
VP4L[4]5	○	○	○	○	○	T15 M4(*)
VP6L[4]5	○	○	○	○	○	
VP8L[4]5	○	○	○	○	○	
VP10L[4]5	○	○	○	○	○	
VP15L[4]5	○	○	○	○	○	
VP20L[4]5	○	○	○	○	○	T40 M6(*)
VP30L[4]5	○	○	○	○	○	
VP40L[4]5	○	○	○	○	○	

	Soft series, Pad & screw set					 P.446	
Model code	○: Available as standard item					Connection config. code	
	[4] Pad rubber material						[8]
	N	S	FS	SE	NE		-S3
	Nitrile	Silicone	Fluoro silicone	Conductive silicone	Conductive NBR (Low resistance)	-S3 spec.	
VP4L[4]5-M4[8]	○	○	○	○	○	○	M4
VP6L[4]5-M4[8]	○	○	○	○	○	○	
VP8L[4]5-M4[8]	○	○	○	○	○	○	
VP10L[4]5-M4[8]	○	○	○	○	○	○	
VP15L[4]5-M4[8]	○	○	○	○	○	○	
VP20L[4]5-M6[8]	○	○	○	○	○	○	M6
VP30L[4]5-M6[8]	○	○	○	○	○	○	
VP40L[4]5-M6[8]	○	○	○	○	○	○	

Soft bellows series, Pad rubber alone

 P.48

Model code	○: Available as standard item							Connection config. code	
	[4] Pad rubber material								
	N	S	U	SE	NE	HN	EP		
	Nitrile	Silicone	Urethane	Conductive silicone	Conductive NBR (Low resistance)	HNBR	EPDM		
VP6LB[4]5	○	○	○	○	○	○	○	T15 M4*	
VP8LB[4]5	○	○	○	○	○	○	○		
VP10LB[4]5	○	○	○	○	○	○	○		
VP15LB[4]5	○	○	○	○	○	○	○	T4D M6*	
VP20LB[4]5	○	○	○	○	○	○	○		





Soft bellows series, Pad & screw set

Model code	○: Available as standard item								Connection config. code
	[4] Pad rubber material							[8]	
	N	S	U	SE	NE	HN	EP	-S3	
	Nitrile	Silicone	Urethane	Conductive silicone	Conductive NBR (Low resistance)	HNBR	EPDM	-S3 spec.	
VP6LB[4]-M4[8]	○	○	○	○	○	○	○	○	
VP8LB[4]-M4[8]	○	○	○	○	○	○	○	○	
VP10LB[4]-M4[8]	○	○	○	○	○	○	○	○	M4
VP15LB[4]-M4[8]	○	○	○	○	○	○	○	○	
VP20LB[4]-M6[8]	○	○	○	○	○	○	○	○	M6

																																													
Skidproof series, Pad rubber alone																																													
<table><tr><td rowspan="4">Model code</td><td colspan="5">○: Available as standard item</td><td rowspan="4">Connection config. code</td></tr><tr><td colspan="5">[4] Pad rubber material</td></tr><tr><td>NH</td><td>S</td><td>U</td><td>F</td><td>NE</td></tr><tr><td>Oil proof NBR</td><td>Silicone</td><td>Urethane</td><td>Fluoro</td><td>Conductive NBR (Low resistance)</td></tr></table>							Model code	○: Available as standard item					Connection config. code	[4] Pad rubber material					NH	S	U	F	NE	Oil proof NBR	Silicone	Urethane	Fluoro	Conductive NBR (Low resistance)																	
								Model code	○: Available as standard item					Connection config. code																															
									[4] Pad rubber material																																				
									NH	S	U	F			NE																														
Oil proof NBR	Silicone	Urethane	Fluoro	Conductive NBR (Low resistance)																																									
Skidproof series, Pad & screw set																																													
<table><tr><td rowspan="7">Model code</td><td colspan="6">○: Available as standard item</td><td rowspan="7">Connection config. code</td></tr><tr><td colspan="6">[4] Pad rubber material</td><td>[8]</td></tr><tr><td>NH</td><td>S</td><td>U</td><td>F</td><td>NE</td><td>-S3</td></tr><tr><td>Oil proof NBR</td><td>Silicone</td><td>Urethane</td><td>Fluoro</td><td>Conductive NBR (Low resistance)</td><td>-S3 spec.</td></tr></table>							Model code	○: Available as standard item						Connection config. code	[4] Pad rubber material						[8]	NH	S	U	F	NE	-S3	Oil proof NBR	Silicone	Urethane	Fluoro	Conductive NBR (Low resistance)	-S3 spec.	<table><tr><td>VP10K[4]</td><td>M4(*)</td></tr><tr><td>VP20K[4]</td><td></td></tr><tr><td>VP30K[4]</td><td>M6(*)</td></tr><tr><td>VP40K[4]</td><td></td></tr><tr><td>VP50K[4]</td><td></td></tr></table>		VP10K[4]	M4(*)	VP20K[4]		VP30K[4]	M6(*)	VP40K[4]		VP50K[4]	
								Model code	○: Available as standard item						Connection config. code																														
									[4] Pad rubber material							[8]																													
									NH	S	U	F	NE			-S3																													
									Oil proof NBR	Silicone	Urethane	Fluoro	Conductive NBR (Low resistance)			-S3 spec.																													
									VP10K[4]	M4(*)																																			
									VP20K[4]																																				
VP30K[4]	M6(*)																																												
VP40K[4]																																													
VP50K[4]																																													
<table><tr><td>VP10K[4]-M4[8]</td><td></td></tr><tr><td>VP20K[4]-M6[8]</td><td></td></tr><tr><td>VP30K[4]-M6[8]</td><td></td></tr><tr><td>VP40K[4]-M6[8]</td><td></td></tr><tr><td>VP50K[4]-M6[8]</td><td></td></tr></table>		VP10K[4]-M4[8]		VP20K[4]-M6[8]		VP30K[4]-M6[8]		VP40K[4]-M6[8]		VP50K[4]-M6[8]		<table><tr><td>M4</td><td></td></tr><tr><td></td><td></td></tr><tr><td>M6</td><td></td></tr><tr><td></td><td></td></tr><tr><td></td><td></td></tr></table>		M4				M6																											
VP10K[4]-M4[8]																																													
VP20K[4]-M6[8]																																													
VP30K[4]-M6[8]																																													
VP40K[4]-M6[8]																																													
VP50K[4]-M6[8]																																													
M4																																													
M6																																													

Notes

*A screw adapter (Soft/Soft bellows series) or a pad screw (Skidproof series) is required to mount on the holder. If you do not have a screw adapter and a pad screw, please select from the Pad & screw set.

CAD data is available at PISCO website.

Packaging specifications 1 pc./bag

Options

[5]: Surface treatment [8]: -S3 ⇒ -S3 spec.

Vacuum pad / Pad & screw set

Holders with the same "connection configuration code (M4 , M6 etc.)" can be connected. For connectable holders, please see the page of Pad holder only (page 384-).



Bellows series,

Pad rubber alone



P526

Model code	○: Available as standard item										Connection config. code
	④ Pad rubber material										
	N	S	YS2	YS4	U	F	SE	NE	HN	EP	
	Nitrile	Silicone	Extra soft silicone ⁽²⁾ Hardness 20 [*]	Hardness 40 [*]	Urethane	Fluoro	Conductive silicone	Conductive NBR (Low resistance)	HNBR	EPDM	
VP2B④	○	○	—	—	—	—	—	—	—	—	H3
VP4B④	○	○	—	—	—	—	○	—	—	—	
VP6B④⑤	○	○	—	—	○	○	○	○	○	○	T8
VP8B④⑤	○	○	—	—	○	○	○	○	○	○	
VP10B④⑤	○	○	(*)	(*)	○	○	○	○	○	○	M4(*)
VP15B④⑤	○	○	(*)	○	○	○	○	○	○	○	
VP20B④⑤	○	○	○	○	○	○	○	○	○	○	M6(*)
VP25B④⑤	○	○	○	○	○	○	○	○	○	○	
VP30B④⑤	○	○	○	○	○	○	○	○	○	○	
VP40B④⑤	○	○	○	○	○	○	○	○	○	○	
VP50B④⑤	○	○	○	○	○	○	○	○	○	○	
VP60B④⑤	○	○	—	—	○	○	○	○	○	○	
VP80B④⑤	○	○	—	—	○	○	○	○	○	○	M10(*)
VP100B④⑤	○	○	—	—	○	○	○	○	○	○	



Bellows series,
Pad & screw set

P526

Model code	○: Available as standard item										Connection config. code	
	④ Pad rubber material											⑧
	N	S	YS2	YS4	U	F	SE	NE	HN	EP		-S3
	Nitrile	Silicone	Extra soft silicone ⁽²⁾ Hardness 20*	Hardness 40*	Urethane	Fluoro	Conductive silicone	Conductive NBR (Low resistance)	HNBR	EPDM		-S3 spec.
VP10B④⑤-M4⑧	○	○	(*)	(*)	○	○	○	○	○	○	○	M4
VP15B④⑤-M4⑧	○	○	(*)	○	○	○	○	○	○	○	○	
VP20B④⑤-M6⑧	○	○	○	○	○	○	○	○	○	○	○	
VP25B④⑤-M6⑧	○	○	○	○	○	○	○	○	○	○	○	M6
VP30B④⑤-M6⑧	○	○	○	○	○	○	○	○	○	○	○	
VP40B④⑤-M6⑧	○	○	○	○	○	○	○	○	○	○	○	
VP50B④⑤-M6⑧	○	○	○	○	○	○	○	○	○	○	○	M10
VP60B④⑤-M10	○	○	—	—	○	○	○	○	○	○	(*)	
VP80B④⑤-M10⑧	○	○	—	—	○	○	○	○	○	○	○	
VP100B④⑤-M10⑧	○	○	—	—	○	○	○	○	○	○	○	

■ Available pad size and material for surface treatment (Bellows series)

Pad dia. (mm)	⑤ Surface treatment code					Model code	YS2	YS4	⑧	-S3	Connection config. code																		
	-NF	-SF	-DL	-ER	-FG																								
	Fiber surface Nylon	Silk coating	DLC coating	Reformed surface	Fluoro-coating (S, SE) (YS2, YS4)																								
φ6	—	—	○	○	—																								
φ8	—	—	○	○	—																								
φ10	—	—	○	○	—																								
φ15	○	○	○	○	○																								
φ20	○	○	○	○	○																								
φ25	○	○	○	○	○																								
φ30	○	○	○	○	○																								
φ40	○	○	○	○	○																								
φ50	○	○	○	○	○																								
φ60	○	○	—	○	—																								
φ80	○	○	—	—	○																								
φ100	—	—	—	—	○																								
Material						Pad & screw set																							
S, F						S, F, SE						N, NE						S, SE, YS2, YS4											
VP10B④-FG						○						○						—						M4③					
VP15B④-FG						○						—						—						M4③					
VP10B④-FG-M4⑧						○						○						○						M4					
VP15B④-FG-M4⑧						○						—						○						M4					

*4. Fluoro-coating of Extra soft silicone (YS2, YS4)

For Extra soft silicone pads, dia. 10 mm or 15 mm of 20° hardness type (YS2) and dia. 10 mm of 40° hardness type (YS4) can be selected only when Fluoro-coating treatment is selected.

- Notes
- *1. For Pad & screw set of Bellows series 60 mm pad dia., the standard spec. is equivalent to "-S3" spec.
- *2. Extra soft silicone is compliant with Food Sanitation Act and FDA.
- *3. A pad screw is required to mount on the holder. If you do not have a pad screw, please select from the Pad & screw set.

- CAD data is available at PISCO website.
- Packaging specifications 1 pc./bag
- Options
- ⑤ : Surface treatment
- ⑧ : -S3 ⇒ -S3 spec.

Holders with the same "connection configuration code (M4 , M6 etc.)" can be connected. For connectable holders, please see the page of Pad holder only (page 384-).

Bellows series, with Resin attachment

Model code	○: Available as standard item								Connection config. code	
	④ Pad rubber material									
	N	S	U	F	SE	NE	HN	EP		
	Nitrile	Silicone	Urethane	Fluoro	Conductive silicone	Conductive NBR (Low resistance)	HNBR	EPDM		
VP10B④-QK	○	○	○	○	○	○	○	○	M4(*)	
VP10B④-QM	○	○	○	○	○	○	○	○		
VP10B④-QKE	○	○	○	○	○	○	○	○		
VP15B④-QK	○	○	○	○	○	○	○	○		
VP15B④-QM	○	○	○	○	○	○	○	○		
VP15B④-QKE	○	○	○	○	○	○	○	○		
VP20B④-QK	○	○	○	○	○	○	○	○	M6(*)	
VP20B④-QM	○	○	○	○	○	○	○	○		
VP20B④-QKE	○	○	○	○	○	○	○	○		
VP25B④-QK	○	○	○	○	○	○	○	○		
VP25B④-QM	○	○	○	○	○	○	○	○		
VP25B④-QKE	○	○	○	○	○	○	○	○		
VP30B④-QK	○	○	○	○	○	○	○	○		
VP30B④-QM	○	○	○	○	○	○	○	○		
VP30B④-QKE	○	○	○	○	○	○	○	○		

Picture of Mark-free resin attachment with pad

By attaching a resin attachment, bellows pad (pad dia.: 10 to 30 mm) can be used as Mark-free pad.

● How to attach

- (1) Fix a bellows pad and a pad holder with a pad screw.
- (2) Attach a resin attachment to the bellows pad.

Bellows series, Pad & screw set + Resin attachment

Model code	○: Available as standard item								Connection config. code	
	④ Pad rubber material									
	N	S	U	F	SE	NE	HN	EP		
	Nitrile	Silicone	Urethane	Fluoro	Conductive silicone	Conductive NBR (Low resistance)	HNBR	EPDM		
VP10B④-M4-QK⑧	○	○	○	○	○	○	○	○	M4	
VP10B④-M4-QM⑧	○	○	○	○	○	○	○	○		
VP10B④-M4-QKE⑧	○	○	○	○	○	○	○	○		
VP15B④-M4-QK⑧	○	○	○	○	○	○	○	○		
VP15B④-M4-QM⑧	○	○	○	○	○	○	○	○		
VP15B④-M4-QKE⑧	○	○	○	○	○	○	○	○		
VP20B④-M6-QK⑧	○	○	○	○	○	○	○	○	M6	
VP20B④-M6-QM⑧	○	○	○	○	○	○	○	○		
VP20B④-M6-QKE⑧	○	○	○	○	○	○	○	○		
VP25B④-M6-QK⑧	○	○	○	○	○	○	○	○		
VP25B④-M6-QM⑧	○	○	○	○	○	○	○	○		
VP25B④-M6-QKE⑧	○	○	○	○	○	○	○	○		
VP30B④-M6-QK⑧	○	○	○	○	○	○	○	○		
VP30B④-M6-QM⑧	○	○	○	○	○	○	○	○		
VP30B④-M6-QKE⑧	○	○	○	○	○	○	○	○		

P526


Mark-free resin attachment for Bellows series

P526

Model code	○: Available as standard item		
	④ Resin attachment material		
	K	M	KE
VP10BQ④-AT	○	○	○
VP15BQ④-AT	○	○	○
VP20BQ④-AT	○	○	○
VP25BQ④-AT	○	○	○
VP30BQ④-AT	○	○	○

Picture of mark-free resin attachment with pad

By attaching a resin attachment, bellows pad (pad dia.: 10 to 30 mm) can be used as Mark-free pad.

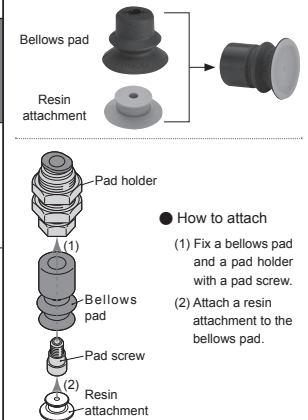



Bellows series,
Pad & screw set + Resin attachment

P526



Mark-free resin attachment for
Bellows series

P526

○: Available as standard item										Connection config. code		○: Available as standard item			
Model code	④ Pad rubber material											Model code	④ Resin attachment material		
	N	S	U	F	SE	NE	HN	EP	-S3				K	M	KE
	Nitrile	Silicone	Urethane	Fluoro	Conductive silicone	Conductive NBR (Low resistance)	HNBR	EPDM	-S3 spec.				PEEK	POM	Conductive PEEK
VP10B④-M4-QK⑧	○	○	○	○	○	○	○	○	○	M4	VP10BQ④-AT	○	○	○	
VP10B④-M4-QM⑧	○	○	○	○	○	○	○	○	○		VP15BQ④-AT	○	○	○	
VP10B④-M4-QKE⑧	○	○	○	○	○	○	○	○	○		VP20BQ④-AT	○	○	○	
VP15B④-M4-QK⑧	○	○	○	○	○	○	○	○	○		VP25BQ④-AT	○	○	○	
VP15B④-M4-QM⑧	○	○	○	○	○	○	○	○	○		VP30BQ④-AT	○	○	○	
VP15B④-M4-QKE⑧	○	○	○	○	○	○	○	○	○						
VP20B④-M6-QK⑧	○	○	○	○	○	○	○	○	○	M6					
VP20B④-M6-QM⑧	○	○	○	○	○	○	○	○	○						
VP20B④-M6-QKE⑧	○	○	○	○	○	○	○	○	○						
VP25B④-M6-QK⑧	○	○	○	○	○	○	○	○	○						
VP25B④-M6-QM⑧	○	○	○	○	○	○	○	○	○						
VP25B④-M6-QKE⑧	○	○	○	○	○	○	○	○	○						
VP30B④-M6-QK⑧	○	○	○	○	○	○	○	○	○						
VP30B④-M6-QM⑧	○	○	○	○	○	○	○	○	○						
VP30B④-M6-QKE⑧	○	○	○	○	○	○	○	○	○						

Mark-free resin attachment for Bellows series

Connection code	Model code	○: Available as standard item		
		④ Resin attachment material		
		K	M	KE
		PEEK	POM	Conductive PEEK
4	VP10BQ④-AT	○	○	○
	VP15BQ④-AT	○	○	○
	VP20BQ④-AT	○	○	○
	VP25BQ④-AT	○	○	○
	VP30BQ④-AT	○	○	○

- Notes
- *1. A pad screw is required to mount on the holder. If you do not have a pad screw, please select from the Pad & screw set.
- *2. Resin attachment must be used with a vacuum pad for work conveyance.
- CAD data is available at PISCO website.
- Packaging specifications 1 pc./bag
- Options
- ⑧ : -S3 ⇒ -S3 spec.

Vacuum pad / Pad & screw set

Holders with the same "connection configuration code" (M4, M6, etc.) can be connected. For connectable holders, please see the page of Pad holder only (page 384-).

 Flat series, Pad rubber alone								 Flat series, Pad & screw set								
Model code	○: Available as standard item						Connection config. code	Model code	○: Available as standard item						Connection config. code	
	④ Pad rubber material								④ Pad rubber material							
	N	S	U	F	SE	NE			N	S	U	F	SE	NE		-S3
	Nitrile	Silicone	Urethane	Fluoro	Conductive silicone	Conductive NBR (Low resistance)			Nitrile	Silicone	Urethane	Fluoro	Conductive silicone	Conductive NBR (Low resistance)		-S3 spec.
VP10F④⑤	○	○	○	○	○	○		VP10F④⑤-M4⑧	○	○	○	○	○	○		
VP15F④⑤	○	○	○	○	○	○	M4⑧	VP15F④⑤-M4⑧	○	○	○	○	○	○	M4⑧	
VP20F④⑤	○	○	○	○	○	○		VP20F④⑤-M6⑧	○	○	○	○	○	○		
VP25F④⑤	○	○	○	○	○	○	M6⑧	VP25F④⑤-M6⑧	○	○	○	○	○	○	M6⑧	
VP30F④⑤	○	○	○	○	○	○		VP30F④⑤-M6⑧	○	○	○	○	○	○		

 Flat large suction flow series, Pad rubber alone							 P622	 Flat large suction flow series, Pad & screw set							 P622
Model code	○: Available as standard item					Connection config. code	Model code	○: Available as standard item						Connection config. code	
	④ Pad rubber material							④ Pad rubber material							
	N	S	F	SE	NE			N	S	F	SE	NE	⑤		
	Nitrile	Silicone	Fluoro	Conductive silicone	Conductive NBR (Low resistance)			Nitrile	Silicone	Fluoro	Conductive silicone	Conductive NBR (Low resistance)	-S3 spec.		
VP10FH④⑤	○	○	○	○	○	M4⑩⑪	VP10FH④⑤-M4⑧	○	○	○	○	○	○	M4	
VP15FH④⑤	○	○	○	○	○		VP15FH④⑤-M4⑧	○	○	○	○	○	○		
VP20FH④⑤	○	○	○	○	○	M6⑩⑪	VP20FH④⑤-M6⑧	○	○	○	○	○	○	M6	
VP25FH④⑤	○	○	○	○	○		VP25FH④⑤-M6⑧	○	○	○	○	○	○		
VP30FH④⑤	○	○	○	○	○		VP30FH④⑤-M6⑧	○	○	○	○	○	○		

									
Mark-free series, Resin pad alone				Mark-free series, with Flexible Swing Joint					
Model code	○: Available as standard item			Connection config. code	Model code	○: Available as standard item			Connection config. code
	④ Pad rubber material					④ Pad rubber material			
	K	M	KE			K	M	KE	
	PEEK	POM	Conductive PEEK		PEEK	POM	Conductive PEEK	-S3 spec.	
VP10Q④	○	○	○	M4⑩⑪	VP10Q④-M4⑧	○	○	○	M4
VP20Q④	○	○	○	M6⑩⑪	VP20Q④-M6⑧	○	○	○	M6
VP30Q④	○	○	○		VP30Q④-M6⑧	○	○	○	



Sponge series,
Pad rubber alone


P656



Sponge series,
Pad & screw set


P656

Model code	○: Available as standard item		Connection config. code	Model code	○: Available as standard item			Connection config. code
	④ Pad rubber material				④ Pad rubber material			
	C	S			C	S	-S3	
	Chloroprene	Silicone			Chloroprene	Silicone	-S3 spec.	
VP10S④	○	○	M6⑩⑪	VP10S④-M6⑧	○	○	○	M6
VP15S④	○	○		VP15S④-M6⑧	○	○	○	
VP20S④	○	○		VP20S④-M6⑧	○	○	○	
VP25S④	○	○		VP25S④-M6⑧	○	○	○	
VP30S④	○	○		VP30S④-M6⑧	○	○	○	
VP35S④	○	○	M10⑩⑪	VP35S④-M6⑧	○	○	○	M10
VP50S④	○	○		VP50S④-M6⑧	○	○	○	
VP70S④	○	○		VP70S④-M10	○	○	(*)3	
VP100S④	○	○		VP100S④-M10	○	○	(*)3	

- Notes**
- *1. A pad screw is required to mount on the holder. If you do not have a pad screw, please select from the Pad & screw set.
 - *2. A Flexible Swing Joint is required to mount on the holder. If you do not have a Flexible Swing Joint, please select from the Mark-free series, with Flexible Swing Joint set.
 - *3. For Pad & screw set of Sponge series 70 mm and 100 mm pad dia., the standard spec. is equivalent to "-S3" spec.

CAD data is available at PISCO website.

Packaging specifications 1 pc./bag

Options
⑤ : Surface treatment
⑧ : -S3 ⇒ -S3 spec.

Holders with the same "connection configuration code" (E10, E20, etc.) can be connected. For connectable holders, please see the page of Pad holder only (page 384-).





Oval series, Pad rubber alone

Model code	○: Available as standard item								Connection config. code							
	④ Pad rubber material															
	N	S	U	F	SE	NE	HN	EP								
	Nitrile	Silicone	Urethane	Fluoro	Conductive silicone	Conductive NBR (Low resistance)	HNBR	EPDM								
VP2×4E④⑤	○	○	○	○	○	○	○	○								
VP3.5×7E④⑤	○	○	○	○	○	○	○	○	E10							
VP4×10E④⑤	○	○	○	○	○	○	○	○								
VP4×20E④⑤	○	○	○	○	○	○	○	○	E20							
VP4×30E④⑤	○	○	—	—	○	○	○	○								
VP5×10E④⑤	○	○	○	○	○	○	○	○	E10							
VP5×20E④⑤	○	○	○	○	○	○	○	○	E20							
VP5×30E④⑤	○	○	○	○	○	○	○	○	E10							
VP6×10E④⑤	○	○	○	○	○	○	○	○	E10							
VP6×20E④⑤	○	○	○	○	○	○	○	○	E20							
VP6×30E④⑤	○	○	○	○	○	○	○	○	E20							
VP8×20E④⑤	○	○	○	○	○	○	○	○								
VP8×30E④⑤	○	○	○	○	○	○	○	○								

M6(1)





Oval series, Pad & screw set

Model code	○: Available as standard item									Connection config. code	
	④ Pad rubber material										
	N	S	U	F	SE	NE	HN	EP	-S3		
	Nitrile	Silicone	Urethane	Fluoro	Conductive silicone	Conductive NBR (Low resistance)	HNBR	EPDM	-S3 spec.		
VP2×4E④⑤-M6⑧	○	○	○	○	○	○	○	○	○		
VP3.5×7E④⑤-M6⑧	○	○	○	○	○	○	○	○	○		
VP4×10E④⑤-M6⑧	○	○	○	○	○	○	○	○	○		
VP4×20E④⑤-M6⑧	○	○	○	○	○	○	○	○	○		
VP4×30E④⑤-M6⑧	○	○	—	—	○	○	○	○	○		
VP5×10E④⑤-M6⑧	○	○	○	○	○	○	○	○	○		
VP5×20E④⑤-M6⑧	○	○	○	○	○	○	○	○	○		
VP5×30E④⑤-M6⑧	○	○	○	○	○	○	○	○	○		
VP6×10E④⑤-M6⑧	○	○	○	○	○	○	○	○	○		
VP6×20E④⑤-M6⑧	○	○	○	○	○	○	○	○	○		
VP6×30E④⑤-M6⑧	○	○	○	○	○	○	○	○	○		
VP8×20E④⑤-M6⑧	○	○	○	○	○	○	○	○	○		
VP8×30E④⑤-M6⑧	○	○	○	○	○	○	○	○	○		

MG


- Notes**
- *A pad screw is required to mount on the holder. If you do not have a pad screw, please select from the Pad & screw set.
- CAD data is available at PISCO website.
- Packaging specifications 1 pc./bag
- Options
⑤ : Surface treatment
⑧ : -S3 ⇒ -S3 spec.

Available pad size and material for surface treatment (Oval series)


Pad dia. (mm)	⑤ Surface treatment code		
	-DL DLC coating	-ER Reformed surface	-FG Fluoro- coating
2×4	○	○	○
3.5×7	○	○	○
4×10	○	○	○
4×20	○	○	○
4×30	○	○	○
5×10	○	○	○
5×20	○	○	○
5×30	○	○	○
6×10	○	○	○
6×20	○	○	○
6×30	○	○	○
8×20	○	○	○
8×30	○	○	○
Material	S, F, SE	N, NE	S, SE

Vacuum Pad Configuration


Pad dia. : $\phi 0.7, \phi 1, \phi 1.5, \phi 2, \phi 3, \phi 4$ mm

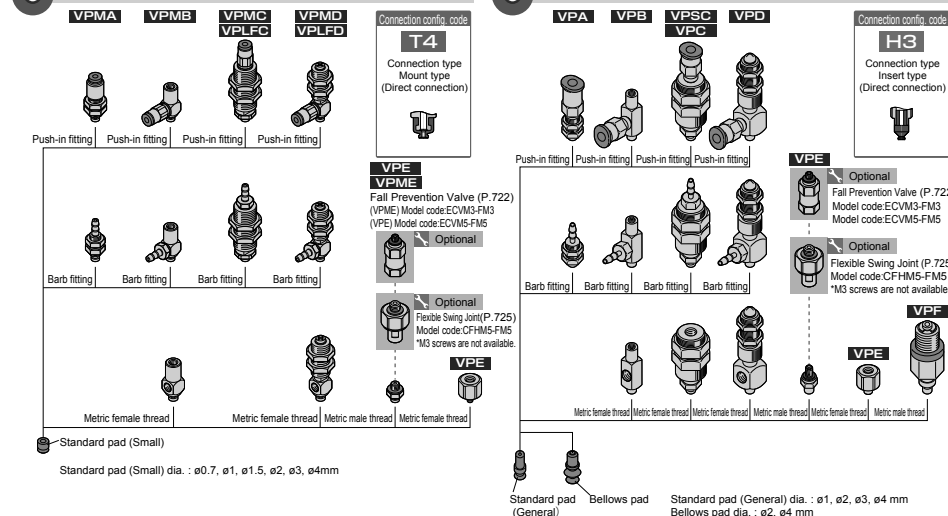

Pad dia. : $\phi 6, \phi 8, \phi 10, \phi 15, \phi 20$ mm



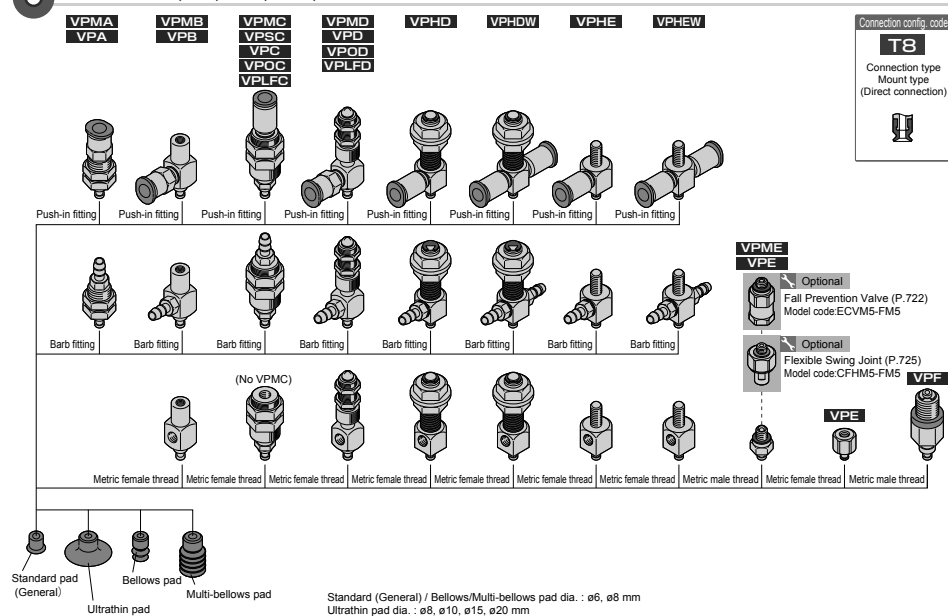


Pad dia. : $\phi 4, \phi 6, \phi 8, \phi 10, \phi 15$ mm


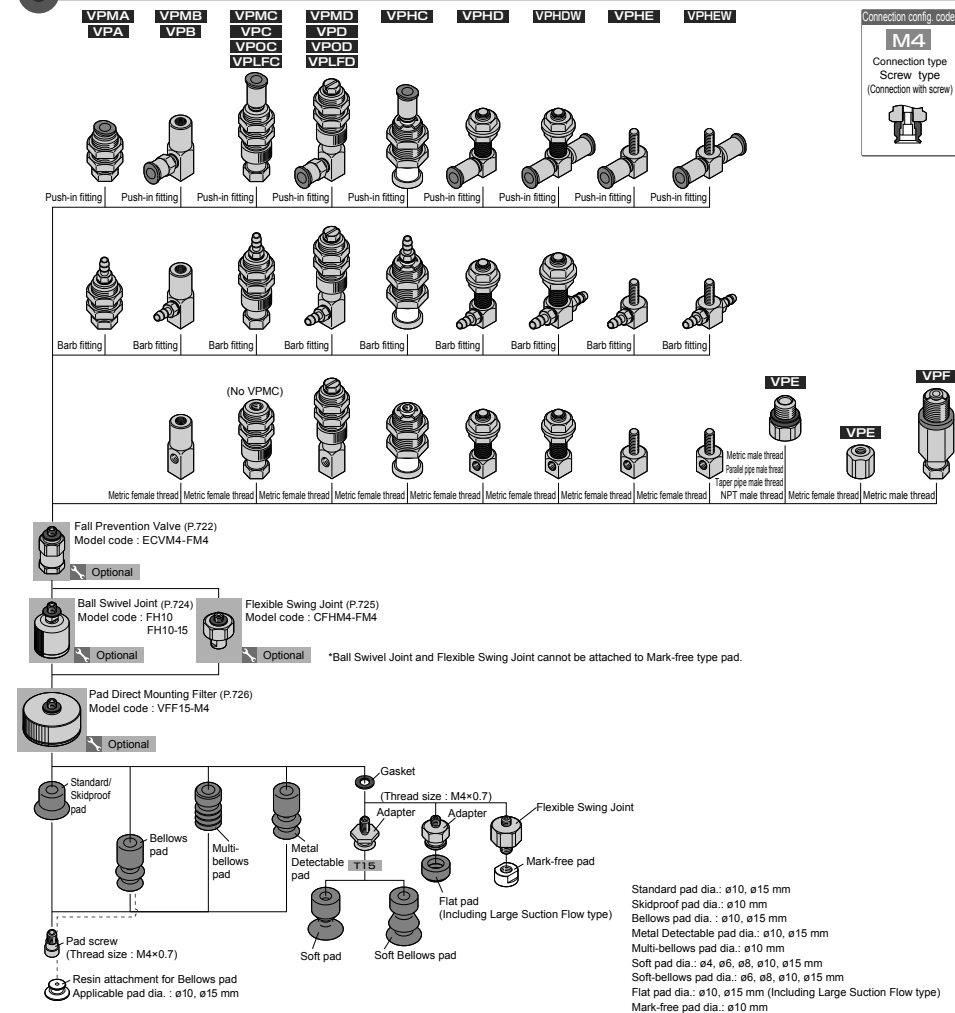


Vacuum Pad Configuration

Pad dia. : $\varnothing 10$, $\varnothing 15$, $\varnothing 20$, $\varnothing 25$, $\varnothing 30$, $\varnothing 35$, $\varnothing 40$, $\varnothing 50$ mm

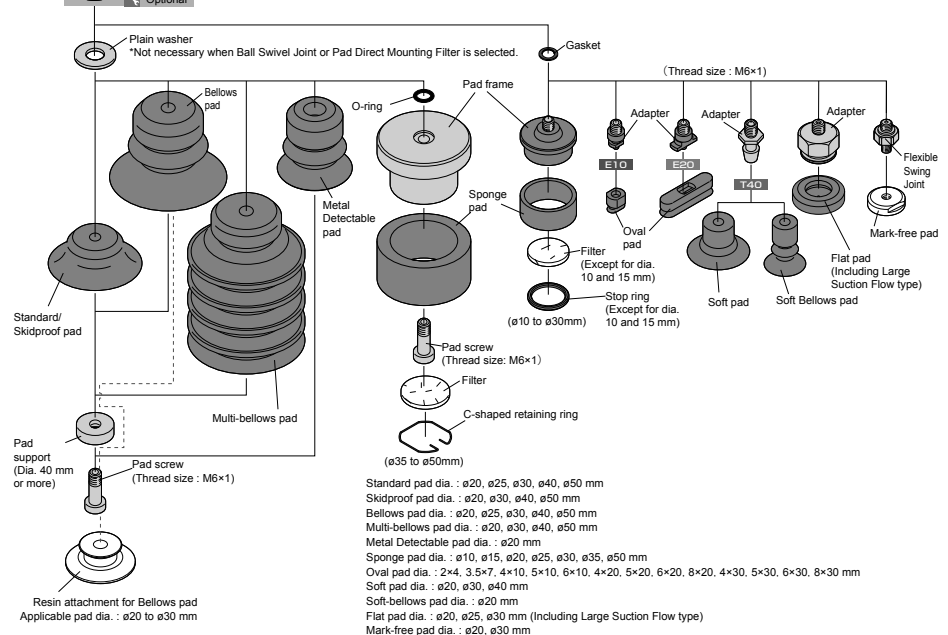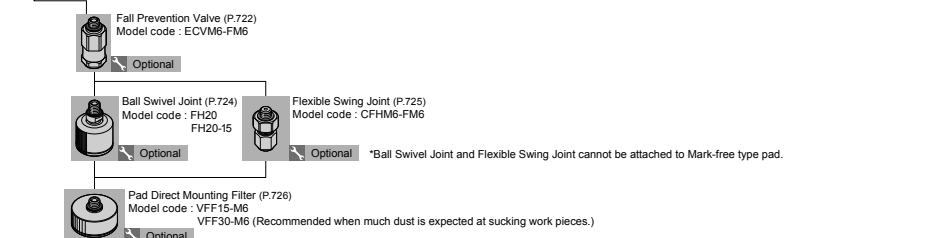
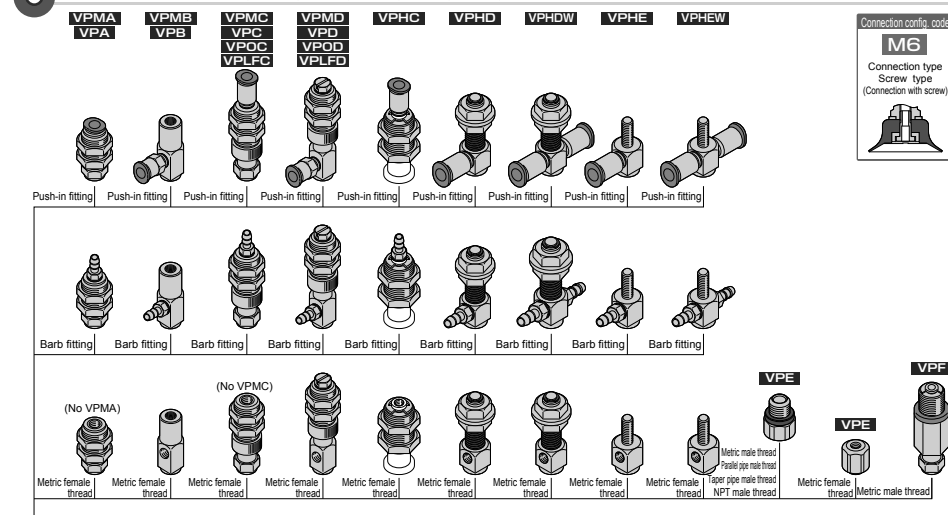


Pad dia. : $\varnothing 60$, $\varnothing 70$, $\varnothing 80$, $\varnothing 100$ mm

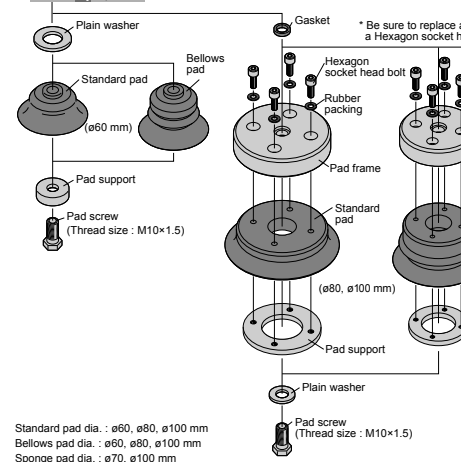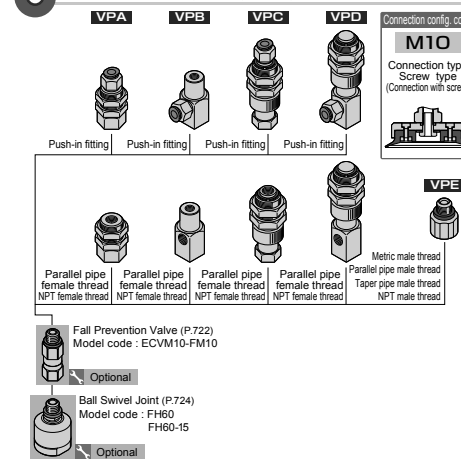

Standard pad dia. : $\varnothing 60$, $\varnothing 80$, $\varnothing 100$ mm
 Bellows pad dia. : $\varnothing 60$, $\varnothing 80$, $\varnothing 100$ mm
 Sponge pad dia. : $\varnothing 70$, $\varnothing 100$ mm


Pad dia. : $\varnothing 150$, $\varnothing 200$ mm

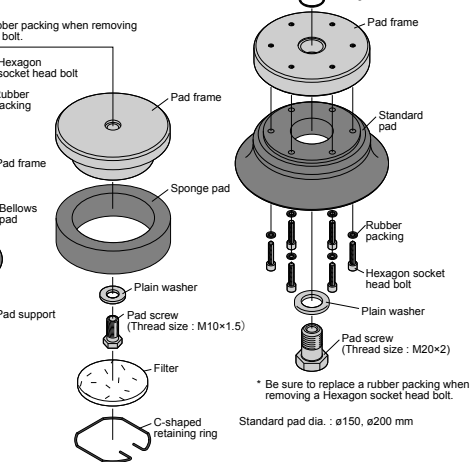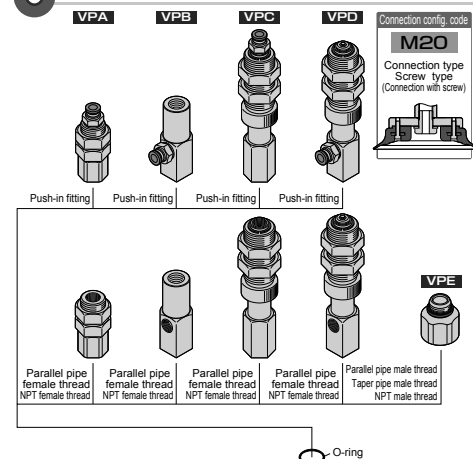



Standard pad dia. : $\varnothing 150$, $\varnothing 200$ mm

Vacuum Pad Configuration



Pad dia. : $\varnothing 4$, $\varnothing 6$, $\varnothing 8$, $\varnothing 10$, $\varnothing 15$ mm (Exclusive to Soft and Soft Bellows type)

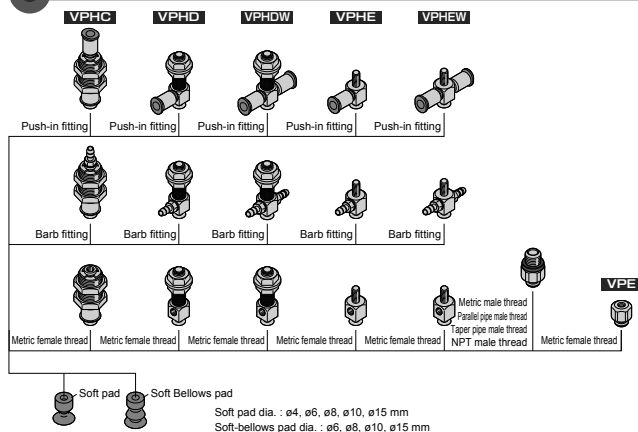



Pad dia. : $\varnothing 20$, $\varnothing 30$, $\varnothing 40$ mm (Exclusive to Soft and Soft Bellows type)

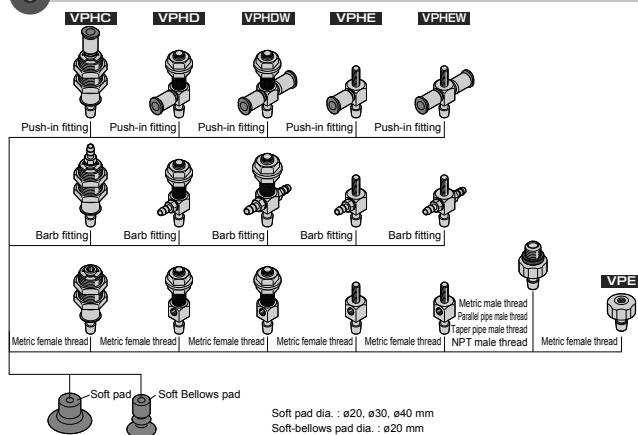



Pad dia. : $\varnothing 20$, $\varnothing 25$ mm (Exclusive to Vacuum pad for packaging bag)

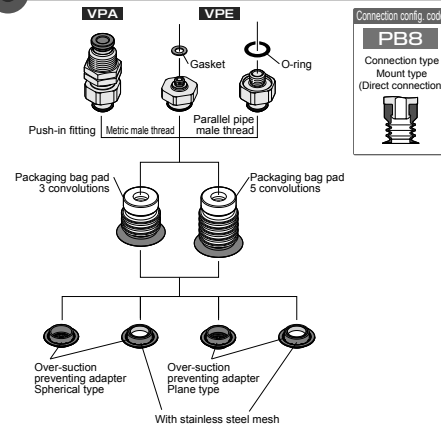

Pad dia. : $\varnothing 30$, $\varnothing 40$, $\varnothing 50$ mm (Exclusive to Vacuum pad for packaging bag)

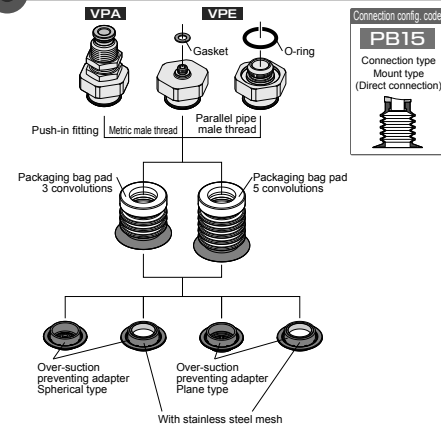

Pad size : 2×4, 3.5×7, 4 to 6×10 mm (Exclusive to Oval type)

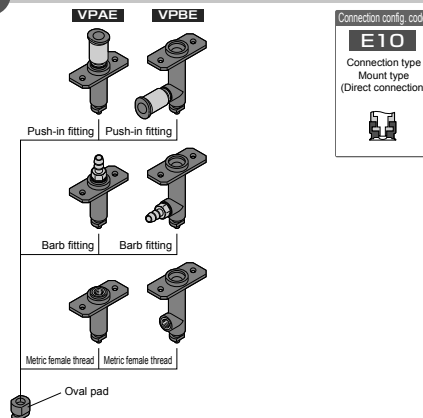

Pad size : 4 to 8×20 mm, 4 to 8×30 mm (Exclusive to Oval type)

