

Vacuum Pad

Characteristics

Best suitable for substrate or long work like semiconductor.

Small sizes for the work-piece which has small suction space is available.

Pad size: 2 x 4 mm and 3.5 x 7 mm are suitable for such work-pieces.

Silicone (S) is Food Sanitation Act compliant.

(Holder is not compliant. Vacuum pad complies only at work-piece contact area.)


*See page 6 for the details of the Food Sanitation Act.

Pad holders exclusively for Oval type which are resin made, light weight and easy for positioning.

Wide variations of Pad holders.

The following combinations of holder and pad rubber are also available although they are not listed on the model code list from the next page onward. Contact us for the details.

- Lightweight VPHC holder that is made of resin and aluminum.
- Lightweight VPHD and VPHDW holders with spring type without cover.
- VPHE and VPHEW holders with reduced height.
- VPHDW and VPHEW holders with dual side vacuum ports, suitable for piping connection of multiple vacuum pads.



Low dust emission holders (VPLFC, VPLFD) with low noise and less wear from sliding are available to prevent dust generation.

VPLFC holder with top port has a separate shaft on the pad side and the vacuum port side, so there is no effect on the stroke caused by the tension of the tube. Low load type is also available to suppress impact when contacting the work-piece.

Wide variations of fixed type direct mount holder (VPE) for various thread sizes.

Metric male threads, metric female threads, taper pipe threads, parallel pipe threads and NPT threads are available.

*Only a part of the combinations are shown on the model code list from the next page onward. Contact us for the details.

Pad surface treatment for suction mark-free (Optional)

Fluoro-coating type is added to the pad rubber surface treatment option to prevent tracing marks.

- DLC coating type: Slippery special coating. Effective for sticking prevention of lightweight or thin work-piece.
- Reformed surface type: Reduces tracing marks by surface reforming of nitrile rubber with chemicals.
- Fluoro-coating type: Surface reforming by special treatment prevents sticking to work-pieces. Improved pad durability and wear resistance.

Holder with dust catcher (Optional)

Collects wear debris generated by sliding spring type holders.

Low-cost, simple holder with receiver tray added.

Applicable to VPC, VPD, and VPF holders.



Accessories (Optional)

Fall Prevention Valve, Swivel (Ball Swivel Joint, Flexible Swing Joint) and Filter options are available.

-S3 spec. (Optional)

No copper-based metallic materials used in flow paths.

The sealing rubber material of the fitting is HNBR or FKM, with good ozone resistance.

RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad size (AxB) (mm)	Tube O.D. (mm)	Model code	13 -S3 spec.	Connection config. code	Pad size (AxB) (mm)	Tube O.D. (mm)	Model code	13 -S3 spec.	Connection config. code
Fixed type, Top port, Push-in fitting, Mini VPMA	2 x 4	ø4	VPMA2x4E[6]7-4J[13]	○		2 x 4	ø5/32	VPMA2x4E[6]7-4/32J[13]	○	
	3.5 x 7	ø4	VPMA3.5x7E[6]7-4J[13]	○		3.5 x 7	ø5/32	VPMA3.5x7E[6]7-4/32J[13]	○	
	4 x 10	ø4	VPMA4x10E[6]7-4J[13]	○		4 x 10	ø5/32	VPMA4x10E[6]7-4/32J[13]	○	
	4 x 20	ø4	VPMA4x20E[6]7-4J[13]	○		4 x 20	ø5/32	VPMA4x20E[6]7-4/32J[13]	○	
	4 x 30	ø4	VPMA4x30E[6]7-4J[13]	○		4 x 30	ø5/32	VPMA4x30E[6]7-4/32J[13]	○	
	5 x 10	ø4	VPMA5x10E[6]7-4J[13]	○		5 x 10	ø5/32	VPMA5x10E[6]7-4/32J[13]	○	
	5 x 20	ø4	VPMA5x20E[6]7-4J[13]	○	MG	5 x 20	ø5/32	VPMA5x20E[6]7-4/32J[13]	○	MG
	5 x 30	ø4	VPMA5x30E[6]7-4J[13]	○		5 x 30	ø5/32	VPMA5x30E[6]7-4/32J[13]	○	
	6 x 10	ø4	VPMA6x10E[6]7-4J[13]	○		6 x 10	ø5/32	VPMA6x10E[6]7-4/32J[13]	○	
	6 x 20	ø4	VPMA6x20E[6]7-4J[13]	○		6 x 20	ø5/32	VPMA6x20E[6]7-4/32J[13]	○	
	6 x 30	ø4	VPMA6x30E[6]7-4J[13]	○		6 x 30	ø5/32	VPMA6x30E[6]7-4/32J[13]	○	
	8 x 20	ø4	VPMA8x20E[6]7-4J[13]	○		8 x 20	ø5/32	VPMA8x20E[6]7-4/32J[13]	○	
	8 x 30	ø4	VPMA8x30E[6]7-4J[13]	○		8 x 30	ø5/32	VPMA8x30E[6]7-4/32J[13]	○	

RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad size (AxB) (mm)	Tube O.D. (mm)	Model code	13 -S3 spec.	Connection config. code	Pad size (AxB) (mm)	Tube O.D. (mm)	Model code	13 -S3 spec.	Connection config. code
Fixed type, Top port, Push-in fitting, Standard VPA	2 x 4	ø3	VPA2x4E[6]7-3J	—		2 x 4	ø1/8	VPA2x4E[6]7-1/8J	—	
		ø4	VPA2x4E[6]7-4J[13]	○			ø5/32	VPA2x4E[6]7-4/32J[13]	○	
		ø6	VPA2x4E[6]7-6J[13]	○			ø1/4	VPA2x4E[6]7-1/4J	○	
	3.5 x 7	ø3	VPA3.5x7E[6]7-3J	—		3.5 x 7	ø1/8	VPA3.5x7E[6]7-1/8J	—	
		ø4	VPA3.5x7E[6]7-4J[13]	○			ø5/32	VPA3.5x7E[6]7-4/32J[13]	○	
		ø6	VPA3.5x7E[6]7-6J[13]	○			ø1/4	VPA3.5x7E[6]7-1/4J	○	
	4 x 10	ø3	VPA4x10E[6]7-3J	—		4 x 10	ø1/8	VPA4x10E[6]7-1/8J	—	
		ø4	VPA4x10E[6]7-4J[13]	○			ø5/32	VPA4x10E[6]7-4/32J[13]	○	
		ø6	VPA4x10E[6]7-6J[13]	○			ø1/4	VPA4x10E[6]7-1/4J	○	
	4 x 20	ø3	VPA4x20E[6]7-3J	—		4 x 20	ø1/8	VPA4x20E[6]7-1/8J	—	
		ø4	VPA4x20E[6]7-4J[13]	○			ø5/32	VPA4x20E[6]7-4/32J[13]	○	
		ø6	VPA4x20E[6]7-6J[13]	○			ø1/4	VPA4x20E[6]7-1/4J	○	
	4 x 30	ø3	VPA4x30E[6]7-3J	—		4 x 30	ø1/8	VPA4x30E[6]7-1/8J	—	
		ø4	VPA4x30E[6]7-4J[13]	○			ø5/32	VPA4x30E[6]7-4/32J[13]	○	
		ø6	VPA4x30E[6]7-6J[13]	○			ø1/4	VPA4x30E[6]7-1/4J	○	
	5 x 10	ø3	VPA5x10E[6]7-3J	—		5 x 10	ø1/8	VPA5x10E[6]7-1/8J	—	
		ø4	VPA5x10E[6]7-4J[13]	○			ø5/32	VPA5x10E[6]7-4/32J[13]	○	
		ø6	VPA5x10E[6]7-6J[13]	○			ø1/4	VPA5x10E[6]7-1/4J	○	
	5 x 20	ø3	VPA5x20E[6]7-3J	—		5 x 20	ø1/8	VPA5x20E[6]7-1/8J	—	
		ø4	VPA5x20E[6]7-4J[13]	○	MG		ø5/32	VPA5x20E[6]7-4/32J[13]	○	MG
		ø6	VPA5x20E[6]7-6J[13]	○			ø1/4	VPA5x20E[6]7-1/4J	○	
	5 x 30	ø3	VPA5x30E[6]7-3J	—		5 x 30	ø1/8	VPA5x30E[6]7-1/8J	—	
		ø4	VPA5x30E[6]7-4J[13]	○			ø5/32	VPA5x30E[6]7-4/32J[13]	○	
		ø6	VPA5x30E[6]7-6J[13]	○			ø1/4	VPA5x30E[6]7-1/4J	○	
	6 x 10	ø3	VPA6x10E[6]7-3J	—		6 x 10	ø1/8	VPA6x10E[6]7-1/8J	—	
		ø4	VPA6x10E[6]7-4J[13]	○			ø5/32	VPA6x10E[6]7-4/32J[13]	○	
		ø6	VPA6x10E[6]7-6J[13]	○			ø1/4	VPA6x10E[6]7-1/4J	○	
	6 x 20	ø3	VPA6x20E[6]7-3J	—		6 x 20	ø1/8	VPA6x20E[6]7-1/8J	—	
		ø4	VPA6x20E[6]7-4J[13]	○			ø5/32	VPA6x20E[6]7-4/32J[13]	○	
		ø6	VPA6x20E[6]7-6J[13]	○			ø1/4	VPA6x20E[6]7-1/4J	○	
	6 x 30	ø3	VPA6x30E[6]7-3J	—		6 x 30	ø1/8	VPA6x30E[6]7-1/8J	—	
		ø4	VPA6x30E[6]7-4J[13]	○			ø5/32	VPA6x30E[6]7-4/32J[13]	○	
		ø6	VPA6x30E[6]7-6J[13]	○			ø1/4	VPA6x30E[6]7-1/4J	○	
	8 x 20	ø3	VPA8x20E[6]7-3J	—		8 x 20	ø1/8	VPA8x20E[6]7-1/8J	—	
		ø4	VPA8x20E[6]7-4J[13]	○			ø5/32	VPA8x20E[6]7-4/32J[13]	○	
		ø6	VPA8x20E[6]7-6J[13]	○			ø1/4	VPA8x20E[6]7-1/4J	○	
	8 x 30	ø3	VPA8x30E[6]7-3J	—		8 x 30	ø1/8	VPA8x30E[6]7-1/8J	—	
		ø4	VPA8x30E[6]7-4J[13]	○			ø5/32	VPA8x30E[6]7-4/32J[13]	○	
		ø6	VPA8x30E[6]7-6J[13]	○			ø1/4	VPA8x30E[6]7-1/4J	○	



Fixed type, Top port, Push-in fitting, Standard
VPA



Fixed type, Top port, Push-in fitting, Standard
VPA

Fixed type, Top port, Push-in fitting, Standard
VPA

Fixed type, Top port, Push-in fitting, Standard
VPA

Fixed type, Top port, Push-in fitting, Standard
VPA

Fixed type, Top port, Push-in fitting, Standard
VPA

Fixed type, Top port, Push-in fitting, Standard
VPA

Fixed type, Top port, Push-in fitting, Standard
VPA



Fixed type, Top port, Push-in fitting, Standard
VPA

Fixed type, Top port, Push-in fitting, Standard
VPA

Fixed type, Top port, Push-in fitting, Standard
VPA

Fixed type, Top port, Push-in fitting, Standard
VPA

Fixed type, Top port, Push-in fitting, Standard
VPA

Fixed type, Top port, Push-in fitting, Standard
VPA

Fixed type, Top port, Push-in fitting, Standard
VPA

Fixed type, Top port, Push-in fitting, Standard
VPA



Fixed type, Top port, Push-in fitting, Standard
VPA

Fixed type, Top port, Push-in fitting, Standard
VPA

Fixed type, Top port, Push-in fitting, Standard
VPA

Fixed type, Top port, Push-in fitting, Standard
VPA

Fixed type, Top port, Push-in fitting, Standard
VPA

Fixed type, Top port, Push-in fitting, Standard
VPA

Fixed type, Top port, Push-in fitting, Standard
VPA

Fixed type, Top port, Push-in fitting, Standard
VPA



Fixed type, Top port, Push-in fitting, Standard
VPA

Fixed type, Top port, Push-in fitting, Standard
VPA

Fixed type, Top port, Push-in fitting, Standard
VPA

Fixed type, Top port, Push-in fitting, Standard
VPA

Fixed type, Top port, Push-in fitting, Standard
VPA

Fixed type, Top port, Push-in fitting, Standard
VPA

Fixed type, Top port, Push-in fitting, Standard
VPA

Fixed type, Top port, Push-in fitting, Standard
VPA



Fixed type, Top port, Push-in fitting, Standard
VPA

Fixed type, Top port, Push-in fitting, Standard
VPA

Fixed type, Top port, Push-in fitting, Standard
VPA

Fixed type, Top port, Push-in fitting, Standard
VPA

Fixed type, Top port, Push-in fitting, Standard
VPA

Fixed type, Top port, Push-in fitting, Standard
VPA

Fixed type, Top port, Push-in fitting, Standard
VPA

Fixed type, Top port, Push-in fitting, Standard
VPA



Fixed type, Top port, Push-in fitting, Standard
VPA

Fixed type, Top port, Push-in fitting, Standard
VPA

Fixed type, Top port, Push-in fitting, Standard
VPA

Fixed type, Top port, Push-in fitting, Standard
VPA

Fixed type, Top port, Push-in fitting, Standard
VPA

Fixed type, Top port, Push-in fitting, Standard
VPA

Fixed type, Top port, Push-in fitting, Standard
VPA

Fixed type, Top port, Push-in fitting, Standard
VPA



Fixed type, Top port, Push-in fitting, Standard
VPA

Fixed type, Top port, Push-in fitting, Standard
VPA

Fixed type, Top port, Push-in fitting, Standard
VPA

Fixed type, Top port, Push-in fitting, Standard
VPA

Fixed type, Top port, Push-in fitting, Standard
VPA

Fixed type, Top port, Push-in fitting, Standard
VPA

Fixed type, Top port, Push-in fitting, Standard
VPA

Fixed type, Top port, Push-in fitting, Standard
VPA



Fixed type, Top port, Push-in fitting, Standard
VPA

Fixed type, Top port, Push-in fitting, Standard
VPA

Fixed type, Top port, Push-in fitting, Standard
VPA

Fixed type, Top port, Push-in fitting, Standard
VPA

Fixed type, Top port, Push-in fitting, Standard
VPA

Fixed type, Top port, Push-in fitting, Standard
VPA

Fixed type, Top port, Push-in fitting, Standard
VPA

Fixed type, Top port, Push-in fitting, Standard
VPA



RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad size (A×B) (mm)	Tube O.D. (mm)	Model code	13 -S3 spec.	Connection config. code	Pad size (A×B) (mm)	Tube O.D. (mm)	Model code	13 -S3 spec.	Connection config. code
Fixed type, Side port, Push-in fitting, Mini VPMB	2×4	ø3	VPMB2x4E[7]-3J	—	—	2×4	ø1/8	VPMB2x4E[7]-1/8J	—	—
		ø4	VPMB2x4E[7]-4J	○	—		ø5/32	VPMB2x4E[7]-5/32J	○	—
		ø6	VPMB2x4E[7]-6J	○	—		ø1/4	VPMB2x4E[7]-1/4J	○	—
	3.5×7	ø3	VPMB3.5x7E[7]-3J	—	—	3.5×7	ø1/8	VPMB3.5x7E[7]-1/8J	—	—
		ø4	VPMB3.5x7E[7]-4J	○	—		ø5/32	VPMB3.5x7E[7]-5/32J	○	—
		ø6	VPMB3.5x7E[7]-6J	○	—		ø1/4	VPMB3.5x7E[7]-1/4J	○	—
	4×10	ø3	VPMB4x10E[7]-3J	—	—	4×10	ø1/8	VPMB4x10E[7]-1/8J	—	—
		ø4	VPMB4x10E[7]-4J	○	—		ø5/32	VPMB4x10E[7]-5/32J	○	—
		ø6	VPMB4x10E[7]-6J	○	—		ø1/4	VPMB4x10E[7]-1/4J	○	—
	4×20	ø3	VPMB4x20E[7]-3J	—	—	4×20	ø1/8	VPMB4x20E[7]-1/8J	—	—
		ø4	VPMB4x20E[7]-4J	○	—		ø5/32	VPMB4x20E[7]-5/32J	○	—
		ø6	VPMB4x20E[7]-6J	○	—		ø1/4	VPMB4x20E[7]-1/4J	○	—
	4×30	ø3	VPMB4x30E[7]-3J	—	—	4×30	ø1/8	VPMB4x30E[7]-1/8J	—	—
		ø4	VPMB4x30E[7]-4J	○	—		ø5/32	VPMB4x30E[7]-5/32J	○	—
		ø6	VPMB4x30E[7]-6J	○	—		ø1/4	VPMB4x30E[7]-1/4J	○	—
	5×10	ø3	VPMB5x10E[7]-3J	—	—	5×10	ø1/8	VPMB5x10E[7]-1/8J	—	—
		ø4	VPMB5x10E[7]-4J	○	—		ø5/32	VPMB5x10E[7]-5/32J	○	—
		ø6	VPMB5x10E[7]-6J	○	—		ø1/4	VPMB5x10E[7]-1/4J	○	—
	5×20	ø3	VPMB5x20E[7]-3J	—	—	5×20	ø1/8	VPMB5x20E[7]-1/8J	—	—
		ø4	VPMB5x20E[7]-4J	○	—		ø5/32	VPMB5x20E[7]-5/32J	○	—
		ø6	VPMB5x20E[7]-6J	○	—		ø1/4	VPMB5x20E[7]-1/4J	○	—
	5×30	ø3	VPMB5x30E[7]-3J	—	—	5×30	ø1/8	VPMB5x30E[7]-1/8J	—	—
		ø4	VPMB5x30E[7]-4J	○	—		ø5/32	VPMB5x30E[7]-5/32J	○	—
		ø6	VPMB5x30E[7]-6J	○	—		ø1/4	VPMB5x30E[7]-1/4J	○	—
	6×10	ø3	VPMB6x10E[7]-3J	—	—	6×10	ø1/8	VPMB6x10E[7]-1/8J	—	—
		ø4	VPMB6x10E[7]-4J	○	—		ø5/32	VPMB6x10E[7]-5/32J	○	—
		ø6	VPMB6x10E[7]-6J	○	—		ø1/4	VPMB6x10E[7]-1/4J	○	—
	6×20	ø3	VPMB6x20E[7]-3J	—	—	6×20	ø1/8	VPMB6x20E[7]-1/8J	—	—
		ø4	VPMB6x20E[7]-4J	○	—		ø5/32	VPMB6x20E[7]-5/32J	○	—
		ø6	VPMB6x20E[7]-6J	○	—		ø1/4	VPMB6x20E[7]-1/4J	○	—
	6×30	ø3	VPMB6x30E[7]-3J	—	—	6×30	ø1/8	VPMB6x30E[7]-1/8J	—	—
		ø4	VPMB6x30E[7]-4J	○	—		ø5/32	VPMB6x30E[7]-5/32J	○	—
		ø6	VPMB6x30E[7]-6J	○	—		ø1/4	VPMB6x30E[7]-1/4J	○	—
	8×20	ø3	VPMB8x20E[7]-3J	—	—	8×20	ø1/8	VPMB8x20E[7]-1/8J	—	—
		ø4	VPMB8x20E[7]-4J	○	—		ø5/32	VPMB8x20E[7]-5/32J	○	—
		ø6	VPMB8x20E[7]-6J	○	—		ø1/4	VPMB8x20E[7]-1/4J	○	—
	8×30	ø3	VPMB8x30E[7]-3J	—	—	8×30	ø1/8	VPMB8x30E[7]-1/8J	—	—
		ø4	VPMB8x30E[7]-4J	○	—		ø5/32	VPMB8x30E[7]-5/32J	○	—
		ø6	VPMB8x30E[7]-6J	○	—		ø1/4	VPMB8x30E[7]-1/4J	○	—
Holder type	Pad size (A×B) (mm)	Male thread size	Model code	13 -S3 spec.	Connection config. code					
Fixed type, Side port, Female thread, Mini VPMB	2×4	M5×0.8	VPMB2x4E[7]-M5	○	—					
	3.5×7	M5×0.8	VPMB3.5x7E[7]-M5	○	—					
	4×10	M5×0.8	VPMB4x10E[7]-M5	○	—					
	4×20	M5×0.8	VPMB4x20E[7]-M5	○	—					
	4×30	M5×0.8	VPMB4x30E[7]-M5	○	—					
	5×10	M5×0.8	VPMB5x10E[7]-M5	○	—					
	5×20	M5×0.8	VPMB5x20E[7]-M5	○	—					
	5×30	M5×0.8	VPMB5x30E[7]-M5	○	—					
	6×10	M5×0.8	VPMB6x10E[7]-M5	○	—					
	6×20	M5×0.8	VPMB6x20E[7]-M5	○	—					
	6×30	M5×0.8	VPMB6x30E[7]-M5	○	—					
	8×20	M5×0.8	VPMB8x20E[7]-M5	○	—					
	8×30	M5×0.8	VPMB8x30E[7]-M5	○	—					

- Notes**
 *1. Holders are also available in Push-in fitting type for tube O.D. of 1.8 mm and 2 mm, and barb fitting type. Contact us for the details.
 *2. Urethane (U) and Fluoro (F) are not available.

- Options**
 7: Surface treatment (DLC coating, Reformed surface, and Fluoro-coating)
 13: -S3 ⇒ -S3 spec. (○ in the lists: Available)
 *1. For "-S3 spec.", the release ring color is dark blue, and the gasket material is FKM+SUS316.
 *2. For inch size push-in fitting, the release ring color is white even for "-S3 spec."



RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad size (A×B) (mm)	Tube O.D. (mm)	Model code	13 -S3 spec.	Connection config. code	Pad size (A×B) (mm)	Tube O.D. (mm)	Model code	13 -S3 spec.	Connection config. code
Fixed type, Side port, Push-in fitting, Standard VPB	2×4	ø3	VPB2x4E[7]-3J	—	—	2×4	ø1/8	VPB2x4E[7]-1/8J	—	—
		ø4	VPB2x4E[7]-4J	○	—		ø5/32	VPB2x4E[7]-5/32J	○	—
		ø6	VPB2x4E[7]-6J	○	—		ø1/4	VPB2x4E[7]-1/4J	○	—
	3.5×7	ø3	VPB3.5x7E[7]-3J	—	—	3.5×7	ø1/8	VPB3.5x7E[7]-1/8J	—	—
		ø4	VPB3.5x7E[7]-4J	○	—		ø5/32	VPB3.5x7E[7]-5/32J	○	—
		ø6	VPB3.5x7E[7]-6J	○	—		ø1/4	VPB3.5x7E[7]-1/4J	○	—
	4×10	ø3	VPB4x10E[7]-3J	—	—	4×10	ø1/8	VPB4x10E[7]-1/8J	—	—
		ø4	VPB4x10E[7]-4J	○	—		ø5/32	VPB4x10E[7]-5/32J	○	—
		ø6	VPB4x10E[7]-6J	○	—		ø1/4	VPB4x10E[7]-1/4J	○	—
	4×20	ø3	VPB4x20E[7]-3J	—	—	4×20	ø1/8	VPB4x20E[7]-1/8J	—	—
		ø4	VPB4x20E[7]-4J	○	—		ø5/32	VPB4x20E[7]-5/32J	○	—
		ø6	VPB4x20E[7]-6J	○	—		ø1/4	VPB4x20E[7]-1/4J	○	—
	4×30	ø3	VPB4x30E[7]-3J	—	—	4×30	ø1/8	VPB4x30E[7]-1/8J	—	—
		ø4	VPB4x30E[7]-4J	○	—		ø5/32	VPB4x30E[7]-5/32J	○	—
		ø6	VPB4x30E[7]-6J	○	—		ø1/4	VPB4x30E[7]-1/4J	○	—
	5×10	ø3	VPB5x10E[7]-3J	—	—	5×10	ø1/8	VPB5x10E[7]-1/8J	—	—
		ø4	VPB5x10E[7]-4J	○	—		ø5/32	VPB5x10E[7]-5/32J	○	—
		ø6	VPB5x10E[7]-6J	○	—		ø1/4	VPB5x10E[7]-1/4J	○	—
	5×20	ø3	VPB5x20E[7]-3J	—	—	5×20	ø1/8	VPB5x20E[7]-1/8J	—	—
		ø4	VPB5x20E[7]-4J	○	—		ø5/32	VPB5x20E[7]-5/32J	○	—
		ø6	VPB5x20E[7]-6J	○	—		ø1/4	VPB5x20E[7]-1/4J	○	—
	5×30	ø3	VPB5x30E[7]-3J	—	—	5×30	ø1/8	VPB5x30E[7]-1/8J	—	—
		ø4	VPB5x30E[7]-4J	○	—		ø5/32	VPB5x30E[7]-5/32J	○	—
		ø6	VPB5x30E[7]-6J	○	—		ø1/4	VPB5x30E[7]-1/4J	○	—
	6×10	ø3	VPB6x10E[7]-3J	—	—	6×10	ø1/8	VPB6x10E[7]-1/8J	—	—
		ø4	VPB6x10E[7]-4J	○	—		ø5/32	VPB6x10E[7]-5/32J	○	—
		ø6	VPB6x10E[7]-6J	○	—		ø1/4	VPB6x10E[7]-1/4J	○	—
	6×20	ø3	VPB6x20E[7]-3J	—	—	6×20	ø1/8	VPB6x20E[7]-1/8J	—	—
		ø4	VPB6x20E[7]-4J	○	—		ø5/32	VPB6x20E[7]-5/32J	○	—
		ø6	VPB6x20E[7]-6J	○	—		ø1/4	VPB6x20E[7]-1/4J	○	—
	6×30	ø3	VPB6x30E[7]-3J	—	—	6×30	ø1/8	VPB6x30E[7]-1/8J	—	—
		ø4	VPB6x30E[7]-4J	○	—		ø5/32	VPB6x30E[7]-5/32J	○	—
		ø6	VPB6x30E[7]-6J	○	—		ø1/4	VPB6x30E[7]-1/4J	○	—
	8×20	ø3	VPB8x20E[7]-3J	—	—	8×20	ø1/8	VPB8x20E[7]-1/8J	—	—
		ø4	VPB8x20E[7]-4J	○	—		ø5/32	VPB8x20E[7]-5/32J	○	—
		ø6	VPB8x20E[7]-6J	○	—		ø1/4	VPB8x20E[7]-1/4J	○	—
	8×30	ø3	VPB8x30E[7]-3J	—	—	8×30	ø1/8	VPB8x30E[7]-1/8J	—	—
		ø4	VPB8x30E[7]-4J	○	—		ø5/32	VPB8x30E[7]-5/32J	○	—
		ø6	VPB8x30E[7]-6J	○	—		ø1/4	VPB8x30E[7]-1/4J	○	—
Holder type	Pad size (A×B) (mm)	Male thread size	Model code	13 -S3 spec.	Connection config. code					
Fixed type, Side port, Female thread, Standard VPB	2×4	M6×1	VPB2x4E[7]-M6	○	—					
	3.5×7	M6×1	VPB3.5x7E[7]-M6	○	—					
	4×10	M6×1	VPB4x10E[7]-M6	○	—					
	4×20	M6×1	VPB4x20E[7]-M6	○	—					
	4×30	M6×1	VPB4x30E[7]-M6	○	—					
	5×10	M6×1	VPB5x10E[7]-M6	○	—					
	5×20	M6×1	VPB5x20E[7]-M6	○	—					
	5×30	M6×1	VPB5x30E[7]-M6	○	—					
	6×10	M6×1	VPB6x10E[7]-M6	○	—					
	6×20	M6×1	VPB6x20E[7]-M6	○	—					
	6×30	M6×1	VPB6x30E[7]-M6	○	—					
	8×20	M6×1	VPB8x20E[7]-M6	○	—					
	8×30	M6×1	VPB8x30E[7]-M6	○	—					

- Notes**
 *1. Barb fitting type holders are also available. Contact us for the details.
 *2. Urethane (U) and Fluoro (F) are not available.

- Options**
 7: Surface treatment (DLC coating, Reformed surface, and Fluoro-coating)
 13: -S3 ⇒ -S3 spec. (○ in the lists: Available)
 *1. For "-S3 spec.", the release ring color is dark blue, and the gasket material is FKM+SUS316.
 *2. For inch size push-in fitting, the release ring color is white even for "-S3 spec."



RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad size (A×B) (mm)	Tube O.D. (mm)	Model code	13 -S3 spec.	Connection config. code	Pad size (A×B) (mm)	Tube O.D. (mm)	Model code	13 -S3 spec.	Connection config. code
Spring type, Top port, Push-in fitting, Mini	2×4	ø3	VPMC2x4-4E617-3J	—	—	2×4	ø1/8	VPMC2x4-4E617-1/4J	—	—
		ø4	VPMC2x4-4E617-4J13	○	—		ø5/32	VPMC2x4-4E617-9/32J13	○	—
	3.5×7	ø3	VPMC3.5x7-4E617-3J	—	—	3.5×7	ø1/8	VPMC3.5x7-4E617-1/4J	—	—
		ø4	VPMC3.5x7-4E617-4J13	○	—		ø5/32	VPMC3.5x7-4E617-9/32J13	○	—
	4×10	ø3	VPMC4x10-4E617-3J	—	—	4×10	ø1/8	VPMC4x10-4E617-1/4J	—	—
		ø4	VPMC4x10-4E617-4J13	○	—		ø5/32	VPMC4x10-4E617-9/32J13	○	—
	4×20	ø3	VPMC4x20-4E617-3J	—	—	4×20	ø1/8	VPMC4x20-4E617-1/4J	—	—
		ø4	VPMC4x20-4E617-4J13	○	—		ø5/32	VPMC4x20-4E617-9/32J13	○	—
	4×30	ø3	VPMC4x30-4E617-3J ^{*2}	—	—	4×30	ø1/8	VPMC4x30-4E617-1/4J ^{*2}	—	—
		ø4	VPMC4x30-4E617-4J13 ^{*2}	○	—		ø5/32	VPMC4x30-4E617-9/32J13 ^{*2}	○	—
	5×10	ø3	VPMC5x10-4E617-3J	—	—	5×10	ø1/8	VPMC5x10-4E617-1/4J	—	—
		ø4	VPMC5x10-4E617-4J13	○	—		ø5/32	VPMC5x10-4E617-9/32J13	○	—
	5×20	ø3	VPMC5x20-4E617-3J	—	—	5×20	ø1/8	VPMC5x20-4E617-1/4J	—	—
		ø4	VPMC5x20-4E617-4J13	○	—		ø5/32	VPMC5x20-4E617-9/32J13	○	—
	5×30	ø3	VPMC5x30-4E617-3J	—	—	5×30	ø1/8	VPMC5x30-4E617-1/4J	—	—
		ø4	VPMC5x30-4E617-4J13	○	—		ø5/32	VPMC5x30-4E617-9/32J13	○	—
	6×10	ø3	VPMC6x10-4E617-3J	—	—	6×10	ø1/8	VPMC6x10-4E617-1/4J	—	—
		ø4	VPMC6x10-4E617-4J13	○	—		ø5/32	VPMC6x10-4E617-9/32J13	○	—
	6×20	ø3	VPMC6x20-4E617-3J	—	—	6×20	ø1/8	VPMC6x20-4E617-1/4J	—	—
		ø4	VPMC6x20-4E617-4J13	○	—		ø5/32	VPMC6x20-4E617-9/32J13	○	—
	6×30	ø3	VPMC6x30-4E617-3J	—	—	6×30	ø1/8	VPMC6x30-4E617-1/4J	—	—
		ø4	VPMC6x30-4E617-4J13	○	—		ø5/32	VPMC6x30-4E617-9/32J13	○	—
	8×20	ø3	VPMC8x20-4E617-3J	—	—	8×20	ø1/8	VPMC8x20-4E617-1/4J	—	—
		ø4	VPMC8x20-4E617-4J13	○	—		ø5/32	VPMC8x20-4E617-9/32J13	○	—
	8×30	ø3	VPMC8x30-4E617-3J	—	—	8×30	ø1/8	VPMC8x30-4E617-1/4J	—	—
		ø4	VPMC8x30-4E617-4J13	○	—		ø5/32	VPMC8x30-4E617-9/32J13	○	—

Notes

- *1. Barb fitting type holders are also selectable. VPMC holders are also available in Push-in fitting type for tube O.D. of 1.8 mm and 2 mm. Contact us for the details.
*2. Urethane (U) and Fluoro (F) are not available.

CAD data is available
at PISCO website.

Packaging specifications
1 pc./bag

Options

17: Surface treatment (DLC coating, Reformed surface, and Fluoro-coating)

13: -DC ⇒ Holder with dust catcher

13: -S3 ⇒ -S3 spec. (○ in the lists: Available)

*1. For "-S3 spec.", the release ring color is dark blue, and the gasket material is FKM+SUS316.

*2. For inch size push-in fitting, the release ring color is white even for "-S3 spec."



RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad size (A×B) (mm)	Stroke (mm)	Tube O.D. (mm)	Model code	13 -S3 spec.	Connection config. code	Pad size (A×B) (mm)	Stroke (mm)	Tube O.D. (inch)	Model code	13 -S3 spec.	Connection config. code
Spring type, Top port, Push-in fitting, Standard VPC  Pad size 2×4mm to 4×30mm		2×4	6	ø3	VPC2x4-6E617-3J9J	—	2×4	6	ø1/8	VPC2x4-6E617-1/8J9J	—	—
			ø4	VPC2x4-6E617-4J9J13	○	ø5/32		VPC2x4-6E617-5/32J9J13	○	—		
			ø6	VPC2x4-6E617-6J9J13	○	ø1/4		VPC2x4-6E617-1/4J9J	—	—		
			10	ø3	VPC2x4-10E617-3J9J	—		ø1/8	VPC2x4-10E617-1/8J9J	—	—	
			ø4	VPC2x4-10E617-4J9J	—	ø5/32		VPC2x4-10E617-5/32J9J	—	—		
			ø6	VPC2x4-10E617-6J9J	—	ø1/4		VPC2x4-10E617-1/4J9J	—	—		
		3.5×7	15	ø3	VPC2x4-15E617-3J9J	—	ø1/8	VPC2x4-15E617-1/8J9J	—	—		
			ø4	VPC2x4-15E617-4J9J	—	ø5/32	VPC2x4-15E617-5/32J9J	—	—			
			ø6	VPC2x4-15E617-6J9J	—	ø1/4	VPC2x4-15E617-1/4J9J	—	—			
			20	ø3	VPC2x4-20E617-3J9J	—	ø1/8	VPC2x4-20E617-1/8J9J	—	—		
ø4	VPC2x4-20E617-4J9J		—	ø5/32	VPC2x4-20E617-5/32J9J	—	—					
ø6	VPC2x4-20E617-6J9J		—	ø1/4	VPC2x4-20E617-1/4J9J	—	—					
4×10	6	6	ø3	VPC3.5x7-6E617-3J9J	—	3.5×7	6	ø1/8	VPC3.5x7-6E617-1/8J9J	—	—	
		ø4	VPC3.5x7-6E617-4J9J13	○	ø5/32		VPC3.5x7-6E617-5/32J9J13	○	—			
		ø6	VPC3.5x7-6E617-6J9J13	○	ø1/4		VPC3.5x7-6E617-1/4J9J	—	—			
		10	ø3	VPC3.5x7-10E617-3J9J	—		ø1/8	VPC3.5x7-10E617-1/8J9J	—	—		
		ø4	VPC3.5x7-10E617-4J9J	—	ø5/32		VPC3.5x7-10E617-5/32J9J	—	—			
		ø6	VPC3.5x7-10E617-6J9J	—	ø1/4		VPC3.5x7-10E617-1/4J9J	—	—			
	15	15	ø3	VPC3.5x7-15E617-3J9J	—	15	15	ø1/8	VPC3.5x7-15E617-1/8J9J	—	—	
		ø4	VPC3.5x7-15E617-4J9J	—	ø5/32		VPC3.5x7-15E617-5/32J9J	—	—			
		ø6	VPC3.5x7-15E617-6J9J	—	ø1/4		VPC3.5x7-15E617-1/4J9J	—	—			
		20	ø3	VPC3.5x7-20E617-3J9J	—		20	20	ø1/8	VPC3.5x7-20E617-1/8J9J	—	—
		ø4	VPC3.5x7-20E617-4J9J	—	ø5/32			VPC3.5x7-20E617-5/32J9J	—	—		
		ø6	VPC3.5x7-20E617-6J9J	—	ø1/4			VPC3.5x7-20E617-1/4J9J	—	—		
4×20	6	6	ø3	VPC4x10-6E617-3J9J	—	4×10	6	ø1/8	VPC4x10-6E617-1/8J9J	—	—	
		ø4	VPC4x10-6E617-4J9J13	○	ø5/32		VPC4x10-6E617-5/32J9J13	○	—			
		ø6	VPC4x10-6E617-6J9J13	○	ø1/4		VPC4x10-6E617-1/4J9J	—	—			
		10	ø3	VPC4x10-10E617-3J9J	—		10	10	ø1/8	VPC4x10-10E617-1/8J9J	—	—
		ø4	VPC4x10-10E617-4J9J	—	ø5/32			VPC4x10-10E617-5/32J9J	—	—		
		ø6	VPC4x10-10E617-6J9J	—	ø1/4			VPC4x10-10E617-1/4J9J	—	—		
	15	15	ø3	VPC4x10-15E617-3J9J	—	15	15	ø1/8	VPC4x10-15E617-1/8J9J	—	—	
		ø4	VPC4x10-15E617-4J9J	—	ø5/32		VPC4x10-15E617-5/32J9J	—	—			
		ø6	VPC4x10-15E617-6J9J	—	ø1/4		VPC4x10-15E617-1/4J9J	—	—			
		20	ø3	VPC4x10-20E617-3J9J	—		20	20	ø1/8	VPC4x10-20E617-1/8J9J	—	—
		ø4	VPC4x10-20E617-4J9J	—	ø5/32			VPC4x10-20E617-5/32J9J	—	—		
		ø6	VPC4x10-20E617-6J9J	—	ø1/4			VPC4x10-20E617-1/4J9J	—	—		
4×30	6	6	ø3	VPC4x20-6E617-3J9J	—	4×20	6	ø1/8	VPC4x20-6E617-1/8J9J	—	—	
		ø4	VPC4x20-6E617-4J9J13	○	ø5/32		VPC4x20-6E617-5/32J9J13	○	—			
		ø6	VPC4x20-6E617-6J9J13	○	ø1/4		VPC4x20-6E617-1/4J9J	—	—			
		10	ø3	VPC4x20-10E617-3J9J	—		10	10	ø1/8	VPC4x20-10E617-1/8J9J	—	—
		ø4	VPC4x20-10E617-4J9J	—	ø5/32			VPC4x20-10E617-5/32J9J	—	—		
		ø6	VPC4x20-10E617-6J9J	—	ø1/4			VPC4x20-10E617-1/4J9J	—	—		
	15	15	ø3	VPC4x20-15E617-3J9J	—	15	15	ø1/8	VPC4x20-15E617-1/8J9J	—	—	
		ø4	VPC4x20-15E617-4J9J	—	ø5/32		VPC4x20-15E617-5/32J9J	—	—			
		ø6	VPC4x20-15E617-6J9J	—	ø1/4		VPC4x20-15E617-1/4J9J	—	—			
		20	ø3	VPC4x20-20E617-3J9J	—		20	20	ø1/8	VPC4x20-20E617-1/8J9J	—	—
		ø4	VPC4x20-20E617-4J9J	—	ø5/32			VPC4x20-20E617-5/32J9J	—	—		
		ø6	VPC4x20-20E617-6J9J	—	ø1/4			VPC4x20-20E617-1/4J9J	—	—		
4×30	6	6	ø3	VPC4x30-6E617-3J9J ^{*2}	—	4×30	6	ø1/8	VPC4x30-6E617-1/8J9J ^{*2}	—	—	
		ø4	VPC4x30-6E617-4J9J ^{*2}	○	ø5/32		VPC4x30-6E617-5/32J9J ^{*2}	○	—			
		ø6	VPC4x30-6E617-6J9J ^{*2}	○	ø1/4		VPC4x30-6E617-1/4J9J ^{*2}	○	—			
		10	ø3	VPC4x30-10E617-3J9J ^{*2}	—		10	10	ø1/8	VPC4x30-10E617-1/8J9J ^{*2}	—	—
		ø4	VPC4x30-10E617-4J9J ^{*2}	—	ø5/32			VPC4x30-10E617-5/32J9J ^{*2}	—	—		
		ø6	VPC4x30-10E617-6J9J ^{*2}	—	ø1/4			VPC4x30-10E617-1/4J9J ^{*2}	—	—		
	15	15	ø3	VPC4x30-15E617-3J9J ^{*2}	—	15	15	ø1/8	VPC4x30-15E617-1/8J9J ^{*2}	—	—	
		ø4	VPC4x30-15E617-4J9J ^{*2}	—	ø5/32		VPC4x30-15E617-5/32J9J ^{*2}	—	—			
		ø6	VPC4x30-15E617-6J9J ^{*2}	—	ø1/4		VPC4x30-15E617-1/4J9J ^{*2}	—	—			
		20	ø3	VPC4x30-20E617-3J9J ^{*2}	—		20	20	ø1/8	VPC4x30-20E617-1/8J9J ^{*2}	—	—
		ø4	VPC4x30-20E617-4J9J ^{*2}	—	ø5/32			VPC4x30-20E617-5/32J9J ^{*2}	—	—		
		ø6	VPC4x30-20E617-6J9J ^{*2}	—	ø1/4			VPC4x30-20E617-1/4J9J ^{*2}	—	—		

RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad size (A×B) (mm)	Stroke (mm)	Tube O.D. (mm)	Model code	13 -S3 spec.	Connection config. code	Pad size (A×B) (mm)	Stroke (mm)	Tube O.D. (inch)	Model code	13 -S3 spec.	Connection config. code
Spring type, Top port, Push-in fitting, Standard VPC 	5×10	6	ø3	VPC5x10-6E617-3J9	—	MG	5×10	6	ø1/8	VPC5x10-6E617-1/4J9	—	MG
			ø4	VPC5x10-6E617-4J9	○				ø5/32	VPC5x10-6E617-4/16J9	○	
			ø6	VPC5x10-6E617-6J9	○				ø1/4	VPC5x10-6E617-1/4J9	○	
		10	ø3	VPC5x10-10E617-3J9	—			10	ø1/8	VPC5x10-10E617-1/4J9	—	
			ø4	VPC5x10-10E617-4J9	—				ø5/32	VPC5x10-10E617-4/16J9	—	
			ø6	VPC5x10-10E617-6J9	—				ø1/4	VPC5x10-10E617-1/4J9	—	
		15	ø3	VPC5x10-15E617-3J9	—			15	ø1/8	VPC5x10-15E617-1/4J9	—	
			ø4	VPC5x10-15E617-4J9	—				ø5/32	VPC5x10-15E617-4/16J9	—	
			ø6	VPC5x10-15E617-6J9	—				ø1/4	VPC5x10-15E617-1/4J9	—	
		20	ø3	VPC5x10-20E617-3J9	—			20	ø1/8	VPC5x10-20E617-1/4J9	—	
			ø4	VPC5x10-20E617-4J9	—				ø5/32	VPC5x10-20E617-4/16J9	—	
			ø6	VPC5x10-20E617-6J9	—				ø1/4	VPC5x10-20E617-1/4J9	—	
	5×20	6	ø3	VPC5x20-6E617-3J9	—	MG	5×20	6	ø1/8	VPC5x20-6E617-1/4J9	—	MG
			ø4	VPC5x20-6E617-4J9	○				ø5/32	VPC5x20-6E617-4/16J9	○	
			ø6	VPC5x20-6E617-6J9	○				ø1/4	VPC5x20-6E617-1/4J9	○	
		10	ø3	VPC5x20-10E617-3J9	—			10	ø1/8	VPC5x20-10E617-1/4J9	—	
			ø4	VPC5x20-10E617-4J9	—				ø5/32	VPC5x20-10E617-4/16J9	—	
			ø6	VPC5x20-10E617-6J9	—				ø1/4	VPC5x20-10E617-1/4J9	—	
		15	ø3	VPC5x20-15E617-3J9	—			15	ø1/8	VPC5x20-15E617-1/4J9	—	
			ø4	VPC5x20-15E617-4J9	—				ø5/32	VPC5x20-15E617-4/16J9	—	
			ø6	VPC5x20-15E617-6J9	—				ø1/4	VPC5x20-15E617-1/4J9	—	
		20	ø3	VPC5x20-20E617-3J9	—			20	ø1/8	VPC5x20-20E617-1/4J9	—	
			ø4	VPC5x20-20E617-4J9	—				ø5/32	VPC5x20-20E617-4/16J9	—	
			ø6	VPC5x20-20E617-6J9	—				ø1/4	VPC5x20-20E617-1/4J9	—	
	5×30	6	ø3	VPC5x30-6E617-3J9	—	MG	5×30	6	ø1/8	VPC5x30-6E617-1/4J9	—	MG
			ø4	VPC5x30-6E617-4J9	○				ø5/32	VPC5x30-6E617-4/16J9	○	
			ø6	VPC5x30-6E617-6J9	○				ø1/4	VPC5x30-6E617-1/4J9	○	
		10	ø3	VPC5x30-10E617-3J9	—			10	ø1/8	VPC5x30-10E617-1/4J9	—	
			ø4	VPC5x30-10E617-4J9	—				ø5/32	VPC5x30-10E617-4/16J9	—	
			ø6	VPC5x30-10E617-6J9	—				ø1/4	VPC5x30-10E617-1/4J9	—	
		15	ø3	VPC5x30-15E617-3J9	—			15	ø1/8	VPC5x30-15E617-1/4J9	—	
			ø4	VPC5x30-15E617-4J9	—				ø5/32	VPC5x30-15E617-4/16J9	—	
			ø6	VPC5x30-15E617-6J9	—				ø1/4	VPC5x30-15E617-1/4J9	—	
		20	ø3	VPC5x30-20E617-3J9	—			20	ø1/8	VPC5x30-20E617-1/4J9	—	
			ø4	VPC5x30-20E617-4J9	—				ø5/32	VPC5x30-20E617-4/16J9	—	
			ø6	VPC5x30-20E617-6J9	—				ø1/4	VPC5x30-20E617-1/4J9	—	

Notes
 *Barb fitting type holders are also available. Contact us for the details.

CAD
 CAD data is available
 at PISCO website.

Packaging specifications
 1 pc./bag

Options
 17: Surface treatment (DLC coating, Reformed surface, and Fluoro-coating)
 91: -DC ⇒ Holder with dust catcher
 13: -S3 ⇒ -S3 spec. (○ in the lists: Available)

*1. For "-S3 spec.", the release ring color is dark blue, and the gasket material is FKM+SUS316.
 *2. For inch size push-in fitting, the release ring color is white even for "-S3 spec."



RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad size (A×B) (mm)	Stroke (mm)	Tube O.D. (mm)	Model code	13 -S3 spec.	Connection config. code	Pad size (A×B) (mm)	Stroke (mm)	Tube O.D. (inch)	Model code	13 -S3 spec.	Connection config. code
Spring type, Top port, Push-in fitting, Standard VPC 	 6×10	6	ø3	VPC6x10-6E617-3J9	—	MB	 6×10	6	ø1/8	VPC6x10-6E617-1/8J9	—	MB
			ø4	VPC6x10-6E617-4J9	○				ø5/32	VPC6x10-6E617-4/16J9	○	
			ø6	VPC6x10-6E617-6J9	○				ø1/4	VPC6x10-6E617-1/4J9	○	
		10	ø3	VPC6x10-10E617-3J9	—			10	ø1/8	VPC6x10-10E617-1/8J9	—	
			ø4	VPC6x10-10E617-4J9	—				ø5/32	VPC6x10-10E617-4/16J9	—	
			ø6	VPC6x10-10E617-6J9	—				ø1/4	VPC6x10-10E617-1/4J9	—	
		15	ø3	VPC6x10-15E617-3J9	—			15	ø1/8	VPC6x10-15E617-1/8J9	—	
			ø4	VPC6x10-15E617-4J9	—				ø5/32	VPC6x10-15E617-4/16J9	—	
			ø6	VPC6x10-15E617-6J9	—				ø1/4	VPC6x10-15E617-1/4J9	—	
		20	ø3	VPC6x10-20E617-3J9	—			20	ø1/8	VPC6x10-20E617-1/8J9	—	
			ø4	VPC6x10-20E617-4J9	—				ø5/32	VPC6x10-20E617-4/16J9	—	
			ø6	VPC6x10-20E617-6J9	—				ø1/4	VPC6x10-20E617-1/4J9	—	
	 6×20	6	ø3	VPC6x20-6E617-3J9	—	MB	 6×20	6	ø1/8	VPC6x20-6E617-1/8J9	—	MB
			ø4	VPC6x20-6E617-4J9	○				ø5/32	VPC6x20-6E617-4/16J9	○	
			ø6	VPC6x20-6E617-6J9	○				ø1/4	VPC6x20-6E617-1/4J9	○	
		10	ø3	VPC6x20-10E617-3J9	—			10	ø1/8	VPC6x20-10E617-1/8J9	—	
			ø4	VPC6x20-10E617-4J9	—				ø5/32	VPC6x20-10E617-4/16J9	—	
			ø6	VPC6x20-10E617-6J9	—				ø1/4	VPC6x20-10E617-1/4J9	—	
		15	ø3	VPC6x20-15E617-3J9	—			15	ø1/8	VPC6x20-15E617-1/8J9	—	
			ø4	VPC6x20-15E617-4J9	—				ø5/32	VPC6x20-15E617-4/16J9	—	
			ø6	VPC6x20-15E617-6J9	—				ø1/4	VPC6x20-15E617-1/4J9	—	
		20	ø3	VPC6x20-20E617-3J9	—			20	ø1/8	VPC6x20-20E617-1/8J9	—	
			ø4	VPC6x20-20E617-4J9	—				ø5/32	VPC6x20-20E617-4/16J9	—	
			ø6	VPC6x20-20E617-6J9	—				ø1/4	VPC6x20-20E617-1/4J9	—	
	 6×30	6	ø3	VPC6x30-6E617-3J9	—	MB	 6×30	6	ø1/8	VPC6x30-6E617-1/8J9	—	MB
			ø4	VPC6x30-6E617-4J9	○				ø5/32	VPC6x30-6E617-4/16J9	○	
			ø6	VPC6x30-6E617-6J9	○				ø1/4	VPC6x30-6E617-1/4J9	○	
		10	ø3	VPC6x30-10E617-3J9	—			10	ø1/8	VPC6x30-10E617-1/8J9	—	
			ø4	VPC6x30-10E617-4J9	—				ø5/32	VPC6x30-10E617-4/16J9	—	
			ø6	VPC6x30-10E617-6J9	—				ø1/4	VPC6x30-10E617-1/4J9	—	
		15	ø3	VPC6x30-15E617-3J9	—			15	ø1/8	VPC6x30-15E617-1/8J9	—	
			ø4	VPC6x30-15E617-4J9	—				ø5/32	VPC6x30-15E617-4/16J9	—	
			ø6	VPC6x30-15E617-6J9	—				ø1/4	VPC6x30-15E617-1/4J9	—	
		20	ø3	VPC6x30-20E617-3J9	—			20	ø1/8	VPC6x30-20E617-1/8J9	—	
			ø4	VPC6x30-20E617-4J9	—				ø5/32	VPC6x30-20E617-4/16J9	—	
			ø6	VPC6x30-20E617-6J9	—				ø1/4	VPC6x30-20E617-1/4J9	—	
	 8×20	6	ø3	VPC8x20-6E617-3J9	—	MB	 8×20	6	ø1/8	VPC8x20-6E617-1/8J9	—	MB
			ø4	VPC8x20-6E617-4J9	○				ø5/32	VPC8x20-6E617-4/16J9	○	
			ø6	VPC8x20-6E617-6J9	○				ø1/4	VPC8x20-6E617-1/4J9	○	
		10	ø3	VPC8x20-10E617-3J9	—			10	ø1/8	VPC8x20-10E617-1/8J9	—	
			ø4	VPC8x20-10E617-4J9	—				ø5/32	VPC8x20-10E617-4/16J9	—	
			ø6	VPC8x20-10E617-6J9	—				ø1/4	VPC8x20-10E617-1/4J9	—	
		15	ø3	VPC8x20-15E617-3J9	—			15	ø1/8	VPC8x20-15E617-1/8J9	—	
ø4			VPC8x20-15E617-4J9	—	ø5/32				VPC8x20-15E617-4/16J9	—		
ø6			VPC8x20-15E617-6J9	—	ø1/4				VPC8x20-15E617-1/4J9	—		
20		ø3	VPC8x20-20E617-3J9	—	20			ø1/8	VPC8x20-20E617-1/8J9	—		
		ø4	VPC8x20-20E617-4J9	—				ø5/32	VPC8x20-20E617-4/16J9	—		
		ø6	VPC8x20-20E617-6J9	—				ø1/4	VPC8x20-20E617-1/4J9	—		
 8×30	6	ø3	VPC8x30-6E617-3J9	—	MB	 8×30	6	ø1/8	VPC8x30-6E617-1/8J9	—	MB	
		ø4	VPC8x30-6E617-4J9	○				ø5/32	VPC8x30-6E617-4/16J9	○		
		ø6	VPC8x30-6E617-6J9	○				ø1/4	VPC8x30-6E617-1/4J9	○		
	10	ø3	VPC8x30-10E617-3J9	—			10	ø1/8	VPC8x30-10E617-1/8J9	—		
		ø4	VPC8x30-10E617-4J9	—				ø5/32	VPC8x30-10E617-4/16J9	—		
		ø6	VPC8x30-10E617-6J9	—				ø1/4	VPC8x30-10E617-1/4J9	—		
	15	ø3	VPC8x30-15E617-3J9	—			15	ø1/8	VPC8x30-15E617-1/8J9	—		
		ø4	VPC8x30-15E617-4J9	—				ø5/32	VPC8x30-15E617-4/16J9	—		
		ø6	VPC8x30-15E617-6J9	—				ø1/4	VPC8x30-15E617-1/4J9	—		
	20	ø3	VPC8x30-20E617-3J9	—			20	ø1/8	VPC8x30-20E617-1/8J9	—		
		ø4	VPC8x30-20E617-4J9	—				ø5/32	VPC8x30-20E617-4/16J9	—		
		ø6	VPC8x30-20E617-6J9	—				ø1/4	VPC8x30-20E617-1/4J9	—		

RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad size (A×B) (mm)	Stroke (mm)	Male thread size	Model code	⑬ -S3 -S3 spec.	Connection config. code
Spring type, Top port, Female thread, Standard VPC 	2×4	6	M6×1	VPC2x4-6E⑬-M6⑬⑬	○	M6
		10		VPC2x4-10E⑬-M6⑬	—	
		15		VPC2x4-15E⑬-M6⑬	—	
		20		VPC2x4-20E⑬-M6⑬	—	
	3.5×7	6	M6×1	VPC3.5x7-6E⑬-M6⑬⑬	○	
		10		VPC3.5x7-10E⑬-M6⑬	—	
		15		VPC3.5x7-15E⑬-M6⑬	—	
		20		VPC3.5x7-20E⑬-M6⑬	—	
	4×10	6	M6×1	VPC4x10-6E⑬-M6⑬⑬	○	
		10		VPC4x10-10E⑬-M6⑬	—	
		15		VPC4x10-15E⑬-M6⑬	—	
		20		VPC4x10-20E⑬-M6⑬	—	
	4×20	6	M6×1	VPC4x20-6E⑬-M6⑬⑬	○	
		10		VPC4x20-10E⑬-M6⑬	—	
		15		VPC4x20-15E⑬-M6⑬	—	
		20		VPC4x20-20E⑬-M6⑬	—	
	4×30	6	M6×1	VPC4x30-6E⑬-M6⑬⑬	○	
		10		VPC4x30-10E⑬-M6⑬	—	
		15		VPC4x30-15E⑬-M6⑬	—	
		20		VPC4x30-20E⑬-M6⑬	—	
	5×10	6	M6×1	VPC5x10-6E⑬-M6⑬⑬	○	
		10		VPC5x10-10E⑬-M6⑬	—	
		15		VPC5x10-15E⑬-M6⑬	—	
		20		VPC5x10-20E⑬-M6⑬	—	
	5×20	6	M6×1	VPC5x20-6E⑬-M6⑬⑬	○	
		10		VPC5x20-10E⑬-M6⑬	—	
		15		VPC5x20-15E⑬-M6⑬	—	
		20		VPC5x20-20E⑬-M6⑬	—	
	5×30	6	M6×1	VPC5x30-6E⑬-M6⑬⑬	○	
		10		VPC5x30-10E⑬-M6⑬	—	
		15		VPC5x30-15E⑬-M6⑬	—	
		20		VPC5x30-20E⑬-M6⑬	—	
	6×10	6	M6×1	VPC6x10-6E⑬-M6⑬⑬	○	
		10		VPC6x10-10E⑬-M6⑬	—	
		15		VPC6x10-15E⑬-M6⑬	—	
		20		VPC6x10-20E⑬-M6⑬	—	
	6×20	6	M6×1	VPC6x20-6E⑬-M6⑬⑬	○	
		10		VPC6x20-10E⑬-M6⑬	—	
		15		VPC6x20-15E⑬-M6⑬	—	
		20		VPC6x20-20E⑬-M6⑬	—	
	6×30	6	M6×1	VPC6x30-6E⑬-M6⑬⑬	○	
		10		VPC6x30-10E⑬-M6⑬	—	
		15		VPC6x30-15E⑬-M6⑬	—	
		20		VPC6x30-20E⑬-M6⑬	—	
	8×20	6	M6×1	VPC8x20-6E⑬-M6⑬⑬	○	
		10		VPC8x20-10E⑬-M6⑬	—	
		15		VPC8x20-15E⑬-M6⑬	—	
		20		VPC8x20-20E⑬-M6⑬	—	
	8×30	6	M6×1	VPC8x30-6E⑬-M6⑬⑬	○	
		10		VPC8x30-10E⑬-M6⑬	—	
		15		VPC8x30-15E⑬-M6⑬	—	
		20		VPC8x30-20E⑬-M6⑬	—	

- Notes**
 *1. Barb fitting type holders are also available. Contact us for the details.
 *2. Urethane (U) and Fluoro (F) are not available.

Options
 ⑬: Surface treatment (DLC coating, Reformed surface, and Fluoro-coating)
 ⑬: -DC ⇒ Holder with dust catcher
 ⑬: -S3 ⇒ S3 spec. (○ in the lists: Available)

- *1. For *-S3 spec., the release ring color is dark blue, and the gasket material is FKM+SUS316.
 *2. For inch size push-in fitting, the release ring color is white even for *-S3 spec.*



RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad size (A×B) (mm)	Stroke (mm)	Tube O.D. (mm)	Model code	Connection config. code	Pad size (A×B) (mm)	Stroke (mm)	Tube O.D. (inch)	Model code	Connection config. code
Spring type, Top port, Push-in fitting, No cover VPOC 	2×4	20	ø3	VPOC2x4-20E⑬-M6⑬⑬	M6	2×4	20	ø1/8	VPOC2x4-20E⑬-M6⑬⑬	M6
			ø4	VPOC2x4-20E⑬-M6⑬				ø5/32	VPOC2x4-20E⑬-M6⑬	
			ø6	VPOC2x4-20E⑬-M6⑬				ø1/4	VPOC2x4-20E⑬-M6⑬	
		30	ø3	VPOC2x4-30E⑬-M6⑬⑬			30	ø1/8	VPOC2x4-30E⑬-M6⑬⑬	
			ø4	VPOC2x4-30E⑬-M6⑬				ø5/32	VPOC2x4-30E⑬-M6⑬	
			ø6	VPOC2x4-30E⑬-M6⑬				ø1/4	VPOC2x4-30E⑬-M6⑬	
		40	ø3	VPOC2x4-40E⑬-M6⑬⑬			40	ø1/8	VPOC2x4-40E⑬-M6⑬⑬	
			ø4	VPOC2x4-40E⑬-M6⑬				ø5/32	VPOC2x4-40E⑬-M6⑬	
			ø6	VPOC2x4-40E⑬-M6⑬				ø1/4	VPOC2x4-40E⑬-M6⑬	
		50	ø3	VPOC2x4-50E⑬-M6⑬⑬			50	ø1/8	VPOC2x4-50E⑬-M6⑬⑬	
			ø4	VPOC2x4-50E⑬-M6⑬				ø5/32	VPOC2x4-50E⑬-M6⑬	
			ø6	VPOC2x4-50E⑬-M6⑬				ø1/4	VPOC2x4-50E⑬-M6⑬	
	3.5×7	20	ø3	VPOC3.5x7-20E⑬-M6⑬⑬		3.5×7	20	ø1/8	VPOC3.5x7-20E⑬-M6⑬⑬	
			ø4	VPOC3.5x7-20E⑬-M6⑬				ø5/32	VPOC3.5x7-20E⑬-M6⑬	
			ø6	VPOC3.5x7-20E⑬-M6⑬				ø1/4	VPOC3.5x7-20E⑬-M6⑬	
		30	ø3	VPOC3.5x7-30E⑬-M6⑬⑬			30	ø1/8	VPOC3.5x7-30E⑬-M6⑬⑬	
			ø4	VPOC3.5x7-30E⑬-M6⑬				ø5/32	VPOC3.5x7-30E⑬-M6⑬	
			ø6	VPOC3.5x7-30E⑬-M6⑬				ø1/4	VPOC3.5x7-30E⑬-M6⑬	
		40	ø3	VPOC3.5x7-40E⑬-M6⑬⑬			40	ø1/8	VPOC3.5x7-40E⑬-M6⑬⑬	
			ø4	VPOC3.5x7-40E⑬-M6⑬				ø5/32	VPOC3.5x7-40E⑬-M6⑬	
			ø6	VPOC3.5x7-40E⑬-M6⑬				ø1/4	VPOC3.5x7-40E⑬-M6⑬	
		50	ø3	VPOC3.5x7-50E⑬-M6⑬⑬			50	ø1/8	VPOC3.5x7-50E⑬-M6⑬⑬	
			ø4	VPOC3.5x7-50E⑬-M6⑬				ø5/32	VPOC3.5x7-50E⑬-M6⑬	
			ø6	VPOC3.5x7-50E⑬-M6⑬				ø1/4	VPOC3.5x7-50E⑬-M6⑬	
	4×10	20	ø3	VPOC4x10-20E⑬-M6⑬⑬		4×10	20	ø1/8	VPOC4x10-20E⑬-M6⑬⑬	
			ø4	VPOC4x10-20E⑬-M6⑬				ø5/32	VPOC4x10-20E⑬-M6⑬	
			ø6	VPOC4x10-20E⑬-M6⑬				ø1/4	VPOC4x10-20E⑬-M6⑬	
		30	ø3	VPOC4x10-30E⑬-M6⑬⑬			30	ø1/8	VPOC4x10-30E⑬-M6⑬⑬	
			ø4	VPOC4x10-30E⑬-M6⑬				ø5/32	VPOC4x10-30E⑬-M6⑬	
			ø6	VPOC4x10-30E⑬-M6⑬				ø1/4	VPOC4x10-30E⑬-M6⑬	
		40	ø3	VPOC4x10-40E⑬-M6⑬⑬			40	ø1/8	VPOC4x10-40E⑬-M6⑬⑬	
			ø4	VPOC4x10-40E⑬-M6⑬				ø5/32	VPOC4x10-40E⑬-M6⑬	
			ø6	VPOC4x10-40E⑬-M6⑬				ø1/4	VPOC4x10-40E⑬-M6⑬	
		50	ø3	VPOC4x10-50E⑬-M6⑬⑬			50	ø1/8	VPOC4x10-50E⑬-M6⑬⑬	
			ø4	VPOC4x10-50E⑬-M6⑬				ø5/32	VPOC4x10-50E⑬-M6⑬	
			ø6	VPOC4x10-50E⑬-M6⑬				ø1/4	VPOC4x10-50E⑬-M6⑬	
	4×20	20	ø3	VPOC4x20-20E⑬-M6⑬⑬		4×20	20	ø1/8	VPOC4x20-20E⑬-M6⑬⑬	
			ø4	VPOC4x20-20E⑬-M6⑬				ø5/32	VPOC4x20-20E⑬-M6⑬	
			ø6	VPOC4x20-20E⑬-M6⑬				ø1/4	VPOC4x20-20E⑬-M6⑬	
		30	ø3	VPOC4x20-30E⑬-M6⑬⑬			30	ø1/8	VPOC4x20-30E⑬-M6⑬⑬	
			ø4	VPOC4x20-30E⑬-M6⑬				ø5/32	VPOC4x20-30E⑬-M6⑬	
			ø6	VPOC4x20-30E⑬-M6⑬				ø1/4	VPOC4x20-30E⑬-M6⑬	
		40	ø3	VPOC4x20-40E⑬-M6⑬⑬			40	ø1/8	VPOC4x20-40E⑬-M6⑬⑬	
			ø4	VPOC4x20-40E⑬-M6⑬				ø5/32	VPOC4x20-40E⑬-M6⑬	
			ø6	VPOC4x20-40E⑬-M6⑬				ø1/4	VPOC4x20-40E⑬-M6⑬	
		50	ø3	VPOC4x20-50E⑬-M6⑬⑬			50	ø1/8	VPOC4x20-50E⑬-M6⑬⑬	
			ø4	VPOC4x20-50E⑬-M6⑬				ø5/32	VPOC4x20-50E⑬-M6⑬	
			ø6	VPOC4x20-50E⑬-M6⑬				ø1/4	VPOC4x20-50E⑬-M6⑬	
	4×30	20	ø3	VPOC4x30-20E⑬-M6⑬⑬		4×30	20	ø1/8	VPOC4x30-20E⑬-M6⑬⑬	
			ø4	VPOC4x30-20E⑬-M6⑬				ø5/32	VPOC4x30-20E⑬-M6⑬	
			ø6	VPOC4x30-20E⑬-M6⑬				ø1/4	VPOC4x30-20E⑬-M6⑬	
		30	ø3	VPOC4x30-30E⑬-M6⑬⑬			30	ø1/8	VPOC4x30-30E⑬-M6⑬⑬	
			ø4	VPOC4x30-30E⑬-M6⑬				ø5/32	VPOC4x30-30E⑬-M6⑬	
			ø6	VPOC4x30-30E⑬-M6⑬				ø1/4	VPOC4x30-30E⑬-M6⑬	
		40	ø3	VPOC4x30-40E⑬-M6⑬⑬			40	ø1/8	VPOC4x30-40E⑬-M6⑬⑬	
			ø4	VPOC4x30-40E⑬-M6⑬				ø5/32	VPOC4x30-40E⑬-M6⑬	
			ø6	VPOC4x30-40E⑬-M6⑬				ø1/4	VPOC4x30-40E⑬-M6⑬	
50	ø3	VPOC4x30-50E⑬-M6⑬⑬	50	ø1/8	VPOC4x30-50E⑬-M6⑬⑬					
	ø4	VPOC4x30-50E⑬-M6⑬		ø5/32	VPOC4x30-50E⑬-M6⑬					
	ø6	VPOC4x30-50E⑬-M6⑬		ø1/4	VPOC4x30-50E⑬-M6⑬					

Vacuum Pad Oval Type

RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad size (A×B) (mm)	Stroke (mm)	Tube O.D. (mm)	Model code	Connection config. code	Pad size (A×B) (mm)	Stroke (mm)	Tube O.D. (inch)	Model code	Connection config. code
Spring type, Top port, Push-in fitting, No cover VPOC		20	ø3	VPOC5x10-20E617-1/4J		5×10	20	ø1/8	VPOC5x10-20E617-1/4J	
			ø4	VPOC5x10-20E617-4J				ø5/32	VPOC5x10-20E617-4J	
			ø6	VPOC5x10-20E617-6J				ø1/4	VPOC5x10-20E617-1/4J	
		30	ø3	VPOC5x10-30E617-3J			30	ø1/8	VPOC5x10-30E617-1/4J	
			ø4	VPOC5x10-30E617-4J				ø5/32	VPOC5x10-30E617-4J	
			ø6	VPOC5x10-30E617-6J				ø1/4	VPOC5x10-30E617-1/4J	
		40	ø3	VPOC5x10-40E617-3J			40	ø1/8	VPOC5x10-40E617-1/4J	
			ø4	VPOC5x10-40E617-4J				ø5/32	VPOC5x10-40E617-4J	
			ø6	VPOC5x10-40E617-6J				ø1/4	VPOC5x10-40E617-1/4J	
		50	ø3	VPOC5x10-50E617-3J			50	ø1/8	VPOC5x10-50E617-1/4J	
			ø4	VPOC5x10-50E617-4J				ø5/32	VPOC5x10-50E617-4J	
			ø6	VPOC5x10-50E617-6J				ø1/4	VPOC5x10-50E617-1/4J	
		20	ø3	VPOC5x20-20E617-3J		5×20	20	ø1/8	VPOC5x20-20E617-1/4J	
			ø4	VPOC5x20-20E617-4J				ø5/32	VPOC5x20-20E617-4J	
			ø6	VPOC5x20-20E617-6J				ø1/4	VPOC5x20-20E617-1/4J	
		30	ø3	VPOC5x20-30E617-3J			30	ø1/8	VPOC5x20-30E617-1/4J	
			ø4	VPOC5x20-30E617-4J				ø5/32	VPOC5x20-30E617-4J	
			ø6	VPOC5x20-30E617-6J				ø1/4	VPOC5x20-30E617-1/4J	
		40	ø3	VPOC5x20-40E617-3J			40	ø1/8	VPOC5x20-40E617-1/4J	
			ø4	VPOC5x20-40E617-4J				ø5/32	VPOC5x20-40E617-4J	
			ø6	VPOC5x20-40E617-6J				ø1/4	VPOC5x20-40E617-1/4J	
		50	ø3	VPOC5x20-50E617-3J			50	ø1/8	VPOC5x20-50E617-1/4J	
			ø4	VPOC5x20-50E617-4J				ø5/32	VPOC5x20-50E617-4J	
			ø6	VPOC5x20-50E617-6J				ø1/4	VPOC5x20-50E617-1/4J	
		20	ø3	VPOC5x30-20E617-3J		5×30	20	ø1/8	VPOC5x30-20E617-1/4J	
			ø4	VPOC5x30-20E617-4J				ø5/32	VPOC5x30-20E617-4J	
			ø6	VPOC5x30-20E617-6J				ø1/4	VPOC5x30-20E617-1/4J	
		30	ø3	VPOC5x30-30E617-3J			30	ø1/8	VPOC5x30-30E617-1/4J	
			ø4	VPOC5x30-30E617-4J				ø5/32	VPOC5x30-30E617-4J	
			ø6	VPOC5x30-30E617-6J				ø1/4	VPOC5x30-30E617-1/4J	
		40	ø3	VPOC5x30-40E617-3J			40	ø1/8	VPOC5x30-40E617-1/4J	
			ø4	VPOC5x30-40E617-4J				ø5/32	VPOC5x30-40E617-4J	
			ø6	VPOC5x30-40E617-6J				ø1/4	VPOC5x30-40E617-1/4J	
		50	ø3	VPOC5x30-50E617-3J			50	ø1/8	VPOC5x30-50E617-1/4J	
			ø4	VPOC5x30-50E617-4J				ø5/32	VPOC5x30-50E617-4J	
			ø6	VPOC5x30-50E617-6J				ø1/4	VPOC5x30-50E617-1/4J	

Notes
*Barb fitting type holders are also available. Contact us for the details.

CAD
data is available
at PISCO website.

Packaging specifications
1 pc./bag

Options
⑦: Surface treatment (DLC. coating, Reformed surface, and Fluoro-coating)

Optional items
⇒ P.715

Surface treatment  Fall Prevention Valve  Swivel Joint for vacuum pad  Filter 

RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad size (A×B) (mm) 	Stroke (mm)	Tube O.D. (mm)	Model code	Connection config. code	Pad size (A×B) (mm) 	Stroke (mm)	Tube O.D. (mm)	Model code	Connection config. code
Spring type, Top port, Push-in fitting, No cover VPOC  Pad size 6×10mm to 8×30mm	6×10	20	ø3	VPOC6x10-20E617-3J	6×10	20	ø1/8	VPOC6x10-20E617-1/4J	6×10	
			ø4	VPOC6x10-20E617-4J			ø5/32	VPOC6x10-20E617-4J		
			ø6	VPOC6x10-20E617-6J			ø1/4	VPOC6x10-20E617-1/4J		
		30	ø3	VPOC6x10-30E617-3J		30	ø1/8	VPOC6x10-30E617-1/4J		
			ø4	VPOC6x10-30E617-4J			ø5/32	VPOC6x10-30E617-4J		
			ø6	VPOC6x10-30E617-6J			ø1/4	VPOC6x10-30E617-1/4J		
		40	ø3	VPOC6x10-40E617-3J		40	ø1/8	VPOC6x10-40E617-1/4J		
			ø4	VPOC6x10-40E617-4J			ø5/32	VPOC6x10-40E617-4J		
			ø6	VPOC6x10-40E617-6J			ø1/4	VPOC6x10-40E617-1/4J		
		50	ø3	VPOC6x10-50E617-3J		50	ø1/8	VPOC6x10-50E617-1/4J		
			ø4	VPOC6x10-50E617-4J			ø5/32	VPOC6x10-50E617-4J		
			ø6	VPOC6x10-50E617-6J			ø1/4	VPOC6x10-50E617-1/4J		
	6×20	20	ø3	VPOC6x20-20E617-3J	6×20	20	ø1/8	VPOC6x20-20E617-1/4J		
			ø4	VPOC6x20-20E617-4J			ø5/32	VPOC6x20-20E617-4J		
			ø6	VPOC6x20-20E617-6J			ø1/4	VPOC6x20-20E617-1/4J		
		30	ø3	VPOC6x20-30E617-3J		30	ø1/8	VPOC6x20-30E617-1/4J		
			ø4	VPOC6x20-30E617-4J			ø5/32	VPOC6x20-30E617-4J		
			ø6	VPOC6x20-30E617-6J			ø1/4	VPOC6x20-30E617-1/4J		
		40	ø3	VPOC6x20-40E617-3J		40	ø1/8	VPOC6x20-40E617-1/4J		
			ø4	VPOC6x20-40E617-4J			ø5/32	VPOC6x20-40E617-4J		
			ø6	VPOC6x20-40E617-6J			ø1/4	VPOC6x20-40E617-1/4J		
		50	ø3	VPOC6x20-50E617-3J		50	ø1/8	VPOC6x20-50E617-1/4J		
			ø4	VPOC6x20-50E617-4J			ø5/32	VPOC6x20-50E617-4J		
			ø6	VPOC6x20-50E617-6J			ø1/4	VPOC6x20-50E617-1/4J		
	6×30	20	ø3	VPOC6x30-20E617-3J	6×30	20	ø1/8	VPOC6x30-20E617-1/4J		
			ø4	VPOC6x30-20E617-4J			ø5/32	VPOC6x30-20E617-4J		
			ø6	VPOC6x30-20E617-6J			ø1/4	VPOC6x30-20E617-1/4J		
		30	ø3	VPOC6x30-30E617-3J		30	ø1/8	VPOC6x30-30E617-1/4J		
			ø4	VPOC6x30-30E617-4J			ø5/32	VPOC6x30-30E617-4J		
			ø6	VPOC6x30-30E617-6J			ø1/4	VPOC6x30-30E617-1/4J		
		40	ø3	VPOC6x30-40E617-3J		40	ø1/8	VPOC6x30-40E617-1/4J		
			ø4	VPOC6x30-40E617-4J			ø5/32	VPOC6x30-40E617-4J		
			ø6	VPOC6x30-40E617-6J			ø1/4	VPOC6x30-40E617-1/4J		
		50	ø3	VPOC6x30-50E617-3J		50	ø1/8	VPOC6x30-50E617-1/4J		
			ø4	VPOC6x30-50E617-4J			ø5/32	VPOC6x30-50E617-4J		
			ø6	VPOC6x30-50E617-6J			ø1/4	VPOC6x30-50E617-1/4J		
	8×20	20	ø3	VPOC8x20-20E617-3J	8×20	20	ø1/8	VPOC8x20-20E617-1/4J		
			ø4	VPOC8x20-20E617-4J			ø5/32	VPOC8x20-20E617-4J		
			ø6	VPOC8x20-20E617-6J			ø1/4	VPOC8x20-20E617-1/4J		
		30	ø3	VPOC8x20-30E617-3J		30	ø1/8	VPOC8x20-30E617-1/4J		
			ø4	VPOC8x20-30E617-4J			ø5/32	VPOC8x20-30E617-4J		
			ø6	VPOC8x20-30E617-6J			ø1/4	VPOC8x20-30E617-1/4J		
		40	ø3	VPOC8x20-40E617-3J		40	ø1/8	VPOC8x20-40E617-1/4J		
			ø4	VPOC8x20-40E617-4J			ø5/32	VPOC8x20-40E617-4J		
			ø6	VPOC8x20-40E617-6J			ø1/4	VPOC8x20-40E617-1/4J		
		50	ø3	VPOC8x20-50E617-3J		50	ø1/8	VPOC8x20-50E617-1/4J		
ø4			VPOC8x20-50E617-4J	ø5/32			VPOC8x20-50E617-4J			
ø6			VPOC8x20-50E617-6J	ø1/4			VPOC8x20-50E617-1/4J			
8×30	20	ø3	VPOC8x30-20E617-3J	8×30	20	ø1/8	VPOC8x30-20E617-1/4J			
		ø4	VPOC8x30-20E617-4J			ø5/32	VPOC8x30-20E617-4J			
		ø6	VPOC8x30-20E617-6J			ø1/4	VPOC8x30-20E617-1/4J			
	30	ø3	VPOC8x30-30E617-3J		30	ø1/8	VPOC8x30-30E617-1/4J			
		ø4	VPOC8x30-30E617-4J			ø5/32	VPOC8x30-30E617-4J			
		ø6	VPOC8x30-30E617-6J			ø1/4	VPOC8x30-30E617-1/4J			
	40	ø3	VPOC8x30-40E617-3J		40	ø1/8	VPOC8x30-40E617-1/4J			
		ø4	VPOC8x30-40E617-4J			ø5/32	VPOC8x30-40E617-4J			
		ø6	VPOC8x30-40E617-6J			ø1/4	VPOC8x30-40E617-1/4J			
	50	ø3	VPOC8x30-50E617-3J		50	ø1/8	VPOC8x30-50E617-1/4J			
		ø4	VPOC8x30-50E617-4J			ø5/32	VPOC8x30-50E617-4J			
		ø6	VPOC8x30-50E617-6J			ø1/4	VPOC8x30-50E617-1/4J			

RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad size (A×B) (mm)		Stroke (mm)	Male thread size	Model code	Connection config. code
	A	B				
Spring type, Top port, Female thread, No cover VPOC	2×4	30	20	M6×1	VPOC2x4-20E	M6
			30		VPOC2x4-30E	
			40		VPOC2x4-40E	
	3.5×7	30	20	M6×1	VPOC3.5x7-20E	
			30		VPOC3.5x7-30E	
			40		VPOC3.5x7-40E	
	4×10	30	20	M6×1	VPOC4x10-20E	
			30		VPOC4x10-30E	
			40		VPOC4x10-40E	
	4×20	30	20	M6×1	VPOC4x20-20E	
			30		VPOC4x20-30E	
			40		VPOC4x20-40E	
	4×30	30	20	M6×1	VPOC4x30-20E	
			30		VPOC4x30-30E	
			40		VPOC4x30-40E	
	5×10	30	20	M6×1	VPOC5x10-20E	M6
			30		VPOC5x10-30E	
			40		VPOC5x10-40E	
	5×20	30	20	M6×1	VPOC5x20-20E	
			30		VPOC5x20-30E	
			40		VPOC5x20-40E	
	5×30	30	20	M6×1	VPOC5x30-20E	
			30		VPOC5x30-30E	
			40		VPOC5x30-40E	
	6×10	30	20	M6×1	VPOC6x10-20E	
			30		VPOC6x10-30E	
			40		VPOC6x10-40E	
	6×20	30	20	M6×1	VPOC6x20-20E	
			30		VPOC6x20-30E	
			40		VPOC6x20-40E	
	6×30	30	20	M6×1	VPOC6x30-20E	M6
			30		VPOC6x30-30E	
			40		VPOC6x30-40E	
	8×20	30	20	M6×1	VPOC8x20-20E	
			30		VPOC8x20-30E	
			40		VPOC8x20-40E	
	8×30	30	20	M6×1	VPOC8x30-20E	
			30		VPOC8x30-30E	
			40		VPOC8x30-40E	
	8×30	30	20	M6×1	VPOC8x30-20E	
			30		VPOC8x30-30E	
			40		VPOC8x30-40E	
	8×30	30	20	M6×1	VPOC8x30-20E	
			30		VPOC8x30-30E	
			40		VPOC8x30-40E	

Notes
*Urethane (U) and Fluoro (F) are not available.

CAD data is available at PISCO website.
Packaging specifications 1 pc./bag

Options
⑦: Surface treatment (DLC. coating, Reformed surface, and Fluoro-coating)

Optional items ⇒ P.715
Surface treatment
Fall Prevention Valve
Swivel Joint for vacuum pad
Filter

RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad size (A×B) (mm)		Stroke (mm)	Tube O.D. (mm)	Model code	Connection config. code	Pad size (A×B) (mm)	Stroke (mm)	Tube O.D. (inch)	Model code	Connection config. code
	A	B									
Spring type, Top port, Push-in fitting, Low dust emission VPLFC	2×4	30	5	ø3	VPLFC2x4-5E	M6	2×4	5	ø1/8	VPLFC2x4-5E	M6
				ø4	VPLFC2x4-5E				ø5/32	VPLFC2x4-5E	
				ø6	VPLFC2x4-5E				ø1/4	VPLFC2x4-5E	
			10	ø3	VPLFC2x4-10E			10	ø1/8	VPLFC2x4-10E	
				ø4	VPLFC2x4-10E				ø5/32	VPLFC2x4-10E	
				ø6	VPLFC2x4-10E				ø1/4	VPLFC2x4-10E	
	3.5×7	30	15	ø3	VPLFC3.5x7-15E		3.5×7	15	ø1/8	VPLFC3.5x7-15E	
				ø4	VPLFC3.5x7-15E				ø5/32	VPLFC3.5x7-15E	
				ø6	VPLFC3.5x7-15E				ø1/4	VPLFC3.5x7-15E	
			20	ø3	VPLFC3.5x7-20E			20	ø1/8	VPLFC3.5x7-20E	
				ø4	VPLFC3.5x7-20E				ø5/32	VPLFC3.5x7-20E	
				ø6	VPLFC3.5x7-20E				ø1/4	VPLFC3.5x7-20E	
	4×10	30	5	ø3	VPLFC4x10-5E		4×10	5	ø1/8	VPLFC4x10-5E	
				ø4	VPLFC4x10-5E				ø5/32	VPLFC4x10-5E	
				ø6	VPLFC4x10-5E				ø1/4	VPLFC4x10-5E	
			10	ø3	VPLFC4x10-10E			10	ø1/8	VPLFC4x10-10E	
				ø4	VPLFC4x10-10E				ø5/32	VPLFC4x10-10E	
				ø6	VPLFC4x10-10E				ø1/4	VPLFC4x10-10E	
	4×20	30	15	ø3	VPLFC4x20-15E		4×20	15	ø1/8	VPLFC4x20-15E	
				ø4	VPLFC4x20-15E				ø5/32	VPLFC4x20-15E	
				ø6	VPLFC4x20-15E				ø1/4	VPLFC4x20-15E	
			20	ø3	VPLFC4x20-20E			20	ø1/8	VPLFC4x20-20E	
				ø4	VPLFC4x20-20E				ø5/32	VPLFC4x20-20E	
				ø6	VPLFC4x20-20E				ø1/4	VPLFC4x20-20E	
	4×30	30	5	ø3	VPLFC4x30-5E		4×30	5	ø1/8	VPLFC4x30-5E	
				ø4	VPLFC4x30-5E				ø5/32	VPLFC4x30-5E	
				ø6	VPLFC4x30-5E				ø1/4	VPLFC4x30-5E	
			10	ø3	VPLFC4x30-10E			10	ø1/8	VPLFC4x30-10E	
				ø4	VPLFC4x30-10E				ø5/32	VPLFC4x30-10E	
				ø6	VPLFC4x30-10E				ø1/4	VPLFC4x30-10E	
	4×30	30	15	ø3	VPLFC4x30-15E			15	ø1/8	VPLFC4x30-15E	
				ø4	VPLFC4x30-15E				ø5/32	VPLFC4x30-15E	
				ø6	VPLFC4x30-15E				ø1/4	VPLFC4x30-15E	
			20	ø3	VPLFC4x30-20E			20	ø1/8	VPLFC4x30-20E	
				ø4	VPLFC4x30-20E				ø5/32	VPLFC4x30-20E	
				ø6	VPLFC4x30-20E				ø1/4	VPLFC4x30-20E	

Notes
*1. Barb fitting type holders are also available. Contact us for the details.
*2. Urethane (U) and Fluoro (F) are not available.

Options
⑦: Surface treatment (DLC. coating, Reformed surface, and Fluoro-coating)
⑧: -SF1/4 ⇒ Spring load 1/4



Packaging specifications
1 pc./bag

RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad size (A×B) (mm)	Stroke (mm)	Tube O.D. (mm)	Model code	Connection config. code	Pad size (A×B) (mm)	Stroke (mm)	Tube O.D. (inch)	Model code	Connection config. code
Spring type, Top port, Push-in fitting, Low dust emission VPLFC		5	ø3	VPLFC5x10-5E[7]-[A][9]	M6	5×10	5	ø1/8	VPLFC5x10-5E[7]-[A][9]	M6
			ø4	VPLFC5x10-5E[7]-[A][9]				ø5/32	VPLFC5x10-5E[7]-[A][9]	
			ø6	VPLFC5x10-5E[7]-[A][9]				ø1/4	VPLFC5x10-5E[7]-[A][9]	
		10	ø3	VPLFC5x10-10E[7]-[A][9]			10	ø1/8	VPLFC5x10-10E[7]-[A][9]	
			ø4	VPLFC5x10-10E[7]-[A][9]				ø5/32	VPLFC5x10-10E[7]-[A][9]	
			ø6	VPLFC5x10-10E[7]-[A][9]				ø1/4	VPLFC5x10-10E[7]-[A][9]	
		15	ø3	VPLFC5x10-15E[7]-[A][9]			15	ø1/8	VPLFC5x10-15E[7]-[A][9]	
			ø4	VPLFC5x10-15E[7]-[A][9]				ø5/32	VPLFC5x10-15E[7]-[A][9]	
			ø6	VPLFC5x10-15E[7]-[A][9]				ø1/4	VPLFC5x10-15E[7]-[A][9]	
		20	ø3	VPLFC5x10-20E[7]-[A][9]			20	ø1/8	VPLFC5x10-20E[7]-[A][9]	
			ø4	VPLFC5x10-20E[7]-[A][9]				ø5/32	VPLFC5x10-20E[7]-[A][9]	
			ø6	VPLFC5x10-20E[7]-[A][9]				ø1/4	VPLFC5x10-20E[7]-[A][9]	
	5×20	5	ø3	VPLFC5x20-5E[7]-[A][9]		5×20	5	ø1/8	VPLFC5x20-5E[7]-[A][9]	
			ø4	VPLFC5x20-5E[7]-[A][9]				ø5/32	VPLFC5x20-5E[7]-[A][9]	
			ø6	VPLFC5x20-5E[7]-[A][9]				ø1/4	VPLFC5x20-5E[7]-[A][9]	
		10	ø3	VPLFC5x20-10E[7]-[A][9]			10	ø1/8	VPLFC5x20-10E[7]-[A][9]	
			ø4	VPLFC5x20-10E[7]-[A][9]				ø5/32	VPLFC5x20-10E[7]-[A][9]	
			ø6	VPLFC5x20-10E[7]-[A][9]				ø1/4	VPLFC5x20-10E[7]-[A][9]	
		15	ø3	VPLFC5x20-15E[7]-[A][9]			15	ø1/8	VPLFC5x20-15E[7]-[A][9]	
			ø4	VPLFC5x20-15E[7]-[A][9]				ø5/32	VPLFC5x20-15E[7]-[A][9]	
			ø6	VPLFC5x20-15E[7]-[A][9]				ø1/4	VPLFC5x20-15E[7]-[A][9]	
		20	ø3	VPLFC5x20-20E[7]-[A][9]			20	ø1/8	VPLFC5x20-20E[7]-[A][9]	
			ø4	VPLFC5x20-20E[7]-[A][9]				ø5/32	VPLFC5x20-20E[7]-[A][9]	
			ø6	VPLFC5x20-20E[7]-[A][9]				ø1/4	VPLFC5x20-20E[7]-[A][9]	
5×30	5×30	5	ø3	VPLFC5x30-5E[7]-[A][9]	M6	5×30	5	ø1/8	VPLFC5x30-5E[7]-[A][9]	M6
			ø4	VPLFC5x30-5E[7]-[A][9]				ø5/32	VPLFC5x30-5E[7]-[A][9]	
			ø6	VPLFC5x30-5E[7]-[A][9]				ø1/4	VPLFC5x30-5E[7]-[A][9]	
		10	ø3	VPLFC5x30-10E[7]-[A][9]			10	ø1/8	VPLFC5x30-10E[7]-[A][9]	
			ø4	VPLFC5x30-10E[7]-[A][9]				ø5/32	VPLFC5x30-10E[7]-[A][9]	
			ø6	VPLFC5x30-10E[7]-[A][9]				ø1/4	VPLFC5x30-10E[7]-[A][9]	
		15	ø3	VPLFC5x30-15E[7]-[A][9]			15	ø1/8	VPLFC5x30-15E[7]-[A][9]	
			ø4	VPLFC5x30-15E[7]-[A][9]				ø5/32	VPLFC5x30-15E[7]-[A][9]	
			ø6	VPLFC5x30-15E[7]-[A][9]				ø1/4	VPLFC5x30-15E[7]-[A][9]	
		20	ø3	VPLFC5x30-20E[7]-[A][9]			20	ø1/8	VPLFC5x30-20E[7]-[A][9]	
			ø4	VPLFC5x30-20E[7]-[A][9]				ø5/32	VPLFC5x30-20E[7]-[A][9]	
			ø6	VPLFC5x30-20E[7]-[A][9]				ø1/4	VPLFC5x30-20E[7]-[A][9]	

Notes
*Barb fitting type holders are also available. Contact us for the details.

Packaging specifications
1 pc./bag

Options
[7]: Surface treatment (DLC: coating, Reformed surface, and Fluoro-coating)
[9]: -SF1/4 ⇒ Spring load 1/4



RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad size (A×B) (mm)	Stroke (mm)	Tube O.D. (mm)	Model code	Connection config. code	Pad size (A×B) (mm)	Stroke (mm)	Tube O.D. (inch)	Model code	Connection config. code
Spring type, Top port, Push-in fitting, Low dust emission VPLFC		5	ø3	VPLFC6x10-5E[7]-[A][9]	M6	6×10	5	ø1/8	VPLFC6x10-5E[7]-[A][9]	M6
			ø4	VPLFC6x10-5E[7]-[A][9]				ø5/32	VPLFC6x10-5E[7]-[A][9]	
			ø6	VPLFC6x10-5E[7]-[A][9]				ø1/4	VPLFC6x10-5E[7]-[A][9]	
		10	ø3	VPLFC6x10-10E[7]-[A][9]			10	ø1/8	VPLFC6x10-10E[7]-[A][9]	
			ø4	VPLFC6x10-10E[7]-[A][9]				ø5/32	VPLFC6x10-10E[7]-[A][9]	
			ø6	VPLFC6x10-10E[7]-[A][9]				ø1/4	VPLFC6x10-10E[7]-[A][9]	
		15	ø3	VPLFC6x10-15E[7]-[A][9]			15	ø1/8	VPLFC6x10-15E[7]-[A][9]	
			ø4	VPLFC6x10-15E[7]-[A][9]				ø5/32	VPLFC6x10-15E[7]-[A][9]	
			ø6	VPLFC6x10-15E[7]-[A][9]				ø1/4	VPLFC6x10-15E[7]-[A][9]	
		20	ø3	VPLFC6x10-20E[7]-[A][9]			20	ø1/8	VPLFC6x10-20E[7]-[A][9]	
			ø4	VPLFC6x10-20E[7]-[A][9]				ø5/32	VPLFC6x10-20E[7]-[A][9]	
			ø6	VPLFC6x10-20E[7]-[A][9]				ø1/4	VPLFC6x10-20E[7]-[A][9]	
	6×20	5	ø3	VPLFC6x20-5E[7]-[A][9]		6×20	5	ø1/8	VPLFC6x20-5E[7]-[A][9]	
			ø4	VPLFC6x20-5E[7]-[A][9]				ø5/32	VPLFC6x20-5E[7]-[A][9]	
			ø6	VPLFC6x20-5E[7]-[A][9]				ø1/4	VPLFC6x20-5E[7]-[A][9]	
		10	ø3	VPLFC6x20-10E[7]-[A][9]			10	ø1/8	VPLFC6x20-10E[7]-[A][9]	
			ø4	VPLFC6x20-10E[7]-[A][9]				ø5/32	VPLFC6x20-10E[7]-[A][9]	
			ø6	VPLFC6x20-10E[7]-[A][9]				ø1/4	VPLFC6x20-10E[7]-[A][9]	
		15	ø3	VPLFC6x20-15E[7]-[A][9]			15	ø1/8	VPLFC6x20-15E[7]-[A][9]	
			ø4	VPLFC6x20-15E[7]-[A][9]				ø5/32	VPLFC6x20-15E[7]-[A][9]	
			ø6	VPLFC6x20-15E[7]-[A][9]				ø1/4	VPLFC6x20-15E[7]-[A][9]	
		20	ø3	VPLFC6x20-20E[7]-[A][9]			20	ø1/8	VPLFC6x20-20E[7]-[A][9]	
			ø4	VPLFC6x20-20E[7]-[A][9]				ø5/32	VPLFC6x20-20E[7]-[A][9]	
			ø6	VPLFC6x20-20E[7]-[A][9]				ø1/4	VPLFC6x20-20E[7]-[A][9]	
8×20	8×20	5	ø3	VPLFC8x20-5E[7]-[A][9]	M6	8×20	5	ø1/8	VPLFC8x20-5E[7]-[A][9]	M6
			ø4	VPLFC8x20-5E[7]-[A][9]				ø5/32	VPLFC8x20-5E[7]-[A][9]	
			ø6	VPLFC8x20-5E[7]-[A][9]				ø1/4	VPLFC8x20-5E[7]-[A][9]	
		10	ø3	VPLFC8x20-10E[7]-[A][9]			10	ø1/8	VPLFC8x20-10E[7]-[A][9]	
			ø4	VPLFC8x20-10E[7]-[A][9]				ø5/32	VPLFC8x20-10E[7]-[A][9]	
			ø6	VPLFC8x20-10E[7]-[A][9]				ø1/4	VPLFC8x20-10E[7]-[A][9]	
		15	ø3	VPLFC8x20-15E[7]-[A][9]			15	ø1/8	VPLFC8x20-15E[7]-[A][9]	
			ø4	VPLFC8x20-15E[7]-[A][9]				ø5/32	VPLFC8x20-15E[7]-[A][9]	
			ø6	VPLFC8x20-15E[7]-[A][9]				ø1/4	VPLFC8x20-15E[7]-[A][9]	
		20	ø3	VPLFC8x20-20E[7]-[A][9]			20	ø1/8	VPLFC8x20-20E[7]-[A][9]	
			ø4	VPLFC8x20-20E[7]-[A][9]				ø5/32	VPLFC8x20-20E[7]-[A][9]	
			ø6	VPLFC8x20-20E[7]-[A][9]				ø1/4	VPLFC8x20-20E[7]-[A][9]	
	8×30	5	ø3	VPLFC8x30-5E[7]-[A][9]		8×30	5	ø1/8	VPLFC8x30-5E[7]-[A][9]	
			ø4	VPLFC8x30-5E[7]-[A][9]				ø5/32	VPLFC8x30-5E[7]-[A][9]	
			ø6	VPLFC8x30-5E[7]-[A][9]				ø1/4	VPLFC8x30-5E[7]-[A][9]	
		10	ø3	VPLFC8x30-10E[7]-[A][9]			10	ø1/8	VPLFC8x30-10E[7]-[A][9]	
			ø4	VPLFC8x30-10E[7]-[A][9]				ø5/32	VPLFC8x30-10E[7]-[A][9]	
			ø6	VPLFC8x30-10E[7]-[A][9]				ø1/4	VPLFC8x30-10E[7]-[A][9]	
		15	ø3	VPLFC8x30-15E[7]-[A][9]			15	ø1/8	VPLFC8x30-15E[7]-[A][9]	
			ø4	VPLFC8x30-15E[7]-[A][9]				ø5/32	VPLFC8x30-15E[7]-[A][9]	
			ø6	VPLFC8x30-15E[7]-[A][9]				ø1/4	VPLFC8x30-15E[7]-[A][9]	
		20	ø3	VPLFC8x30-20E[7]-[A][9]			20	ø1/8	VPLFC8x30-20E[7]-[A][9]	
			ø4	VPLFC8x30-20E[7]-[A][9]				ø5/32	VPLFC8x30-20E[7]-[A][9]	
			ø6	VPLFC8x30-20E[7]-[A][9]				ø1/4	VPLFC8x30-20E[7]-[A][9]	

RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad size (A×B) (mm)	Stroke (mm)	Male thread size	Model code	Connection config. code
Spring type, Top port, Female thread, Low dust emission VPLFC		5	M6×1	VPLFC2x4-5E[7]-M6[3]	
		10	M6×1	VPLFC2x4-10E[7]-M6[3]	
		15	M6×1	VPLFC2x4-15E[7]-M6[3]	
		20	M6×1	VPLFC2x4-20E[7]-M6[3]	
	2×4	5	M6×1	VPLFC3.5x7-5E[7]-M6[3]	
		10	M6×1	VPLFC3.5x7-10E[7]-M6[3]	
		15	M6×1	VPLFC3.5x7-15E[7]-M6[3]	
		20	M6×1	VPLFC3.5x7-20E[7]-M6[3]	
	3.5×7	5	M6×1	VPLFC4x10-5E[7]-M6[3]	
		10	M6×1	VPLFC4x10-10E[7]-M6[3]	
		15	M6×1	VPLFC4x10-15E[7]-M6[3]	
		20	M6×1	VPLFC4x10-20E[7]-M6[3]	
	4×10	5	M6×1	VPLFC4x20-5E[7]-M6[3]	
		10	M6×1	VPLFC4x20-10E[7]-M6[3]	
		15	M6×1	VPLFC4x20-15E[7]-M6[3]	
		20	M6×1	VPLFC4x20-20E[7]-M6[3]	
	4×20	5	M6×1	VPLFC4x30-5E[7]-M6[3]*	
		10	M6×1	VPLFC4x30-10E[7]-M6[3]*	
		15	M6×1	VPLFC4x30-15E[7]-M6[3]*	
		20	M6×1	VPLFC4x30-20E[7]-M6[3]*	
	4×30	5	M6×1	VPLFC5x10-5E[7]-M6[3]	
		10	M6×1	VPLFC5x10-10E[7]-M6[3]	
		15	M6×1	VPLFC5x10-15E[7]-M6[3]	
		20	M6×1	VPLFC5x10-20E[7]-M6[3]	
	5×10	5	M6×1	VPLFC5x20-5E[7]-M6[3]	
		10	M6×1	VPLFC5x20-10E[7]-M6[3]	
		15	M6×1	VPLFC5x20-15E[7]-M6[3]	
		20	M6×1	VPLFC5x20-20E[7]-M6[3]	
	5×20	5	M6×1	VPLFC5x30-5E[7]-M6[3]	
		10	M6×1	VPLFC5x30-10E[7]-M6[3]	
		15	M6×1	VPLFC5x30-15E[7]-M6[3]	
		20	M6×1	VPLFC5x30-20E[7]-M6[3]	
	5×30	5	M6×1	VPLFC6x10-5E[7]-M6[3]	
		10	M6×1	VPLFC6x10-10E[7]-M6[3]	
		15	M6×1	VPLFC6x10-15E[7]-M6[3]	
		20	M6×1	VPLFC6x10-20E[7]-M6[3]	
	6×10	5	M6×1	VPLFC6x20-5E[7]-M6[3]	
		10	M6×1	VPLFC6x20-10E[7]-M6[3]	
		15	M6×1	VPLFC6x20-15E[7]-M6[3]	
		20	M6×1	VPLFC6x20-20E[7]-M6[3]	
	6×20	5	M6×1	VPLFC6x30-5E[7]-M6[3]	
		10	M6×1	VPLFC6x30-10E[7]-M6[3]	
		15	M6×1	VPLFC6x30-15E[7]-M6[3]	
		20	M6×1	VPLFC6x30-20E[7]-M6[3]	
	6×30	5	M6×1	VPLFC8x20-5E[7]-M6[3]	
		10	M6×1	VPLFC8x20-10E[7]-M6[3]	
		15	M6×1	VPLFC8x20-15E[7]-M6[3]	
		20	M6×1	VPLFC8x20-20E[7]-M6[3]	
	8×20	5	M6×1	VPLFC8x30-5E[7]-M6[3]	
		10	M6×1	VPLFC8x30-10E[7]-M6[3]	
		15	M6×1	VPLFC8x30-15E[7]-M6[3]	
		20	M6×1	VPLFC8x30-20E[7]-M6[3]	
	8×30	5	M6×1	VPLFC8x30-5E[7]-M6[3]	
		10	M6×1	VPLFC8x30-10E[7]-M6[3]	
		15	M6×1	VPLFC8x30-15E[7]-M6[3]	
		20	M6×1	VPLFC8x30-20E[7]-M6[3]	

Notes
*Urethane (U) and Fluoro (F) are not available.

Packaging specifications
1 pc./bag

Options
[7]: Surface treatment (DLC. coating, Reformed surface, and Fluoro-coating)
[3]: -SF1/4 ⇒ Spring load 1/4



RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad size (A×B) (mm)	Tube O.D. (mm)	Model code	13 -S3 spec.	Connection config. code	Pad size (A×B) (mm)	Tube O.D. (inch)	Model code	13 -S3 spec.	Connection config. code
Spring type, Push-in fitting, Mini VPMD 		2×4	ø3	VPMD2x4-4E[7]-3J	—	2×4	ø1/8	VPMD2x4-4E[7]-1/8J	—	
			ø4	VPMD2x4-4E[7]-4J[3]	○		ø5/32	VPMD2x4-4E[7]-5/32J[3]	○	
		3.5×7	ø6	VPMD2x4-4E[7]-6J[3]	○	3.5×7	ø1/4	VPMD2x4-4E[7]-1/4J	—	
			ø3	VPMD3.5x7-4E[7]-3J	—		ø1/8	VPMD3.5x7-4E[7]-1/8J	—	
		4×10	ø4	VPMD3.5x7-4E[7]-4J[3]	○	4×10	ø5/32	VPMD3.5x7-4E[7]-5/32J[3]	○	
			ø6	VPMD3.5x7-4E[7]-6J[3]	○		ø1/4	VPMD3.5x7-4E[7]-1/4J	—	
		4×20	ø3	VPMD4x10-4E[7]-3J	—	4×20	ø1/8	VPMD4x10-4E[7]-1/8J	—	
			ø4	VPMD4x10-4E[7]-4J[3]	○		ø5/32	VPMD4x10-4E[7]-5/32J[3]	○	
		4×30	ø6	VPMD4x10-4E[7]-6J[3]	○	4×30	ø1/4	VPMD4x10-4E[7]-1/4J	—	
			ø3	VPMD4x20-4E[7]-3J	—		ø1/8	VPMD4x20-4E[7]-1/8J	—	
		5×10	ø4	VPMD4x20-4E[7]-4J[3]	○	5×10	ø5/32	VPMD4x20-4E[7]-5/32J[3]	○	
			ø6	VPMD4x20-4E[7]-6J[3]	○		ø1/4	VPMD4x20-4E[7]-1/4J	—	
		5×20	ø3	VPMD4x30-4E[7]-3J**	—	5×20	ø1/8	VPMD4x30-4E[7]-1/8J**	—	
			ø4	VPMD4x30-4E[7]-4J[3]**	○		ø5/32	VPMD4x30-4E[7]-5/32J[3]**	○	
		5×30	ø6	VPMD4x30-4E[7]-6J[3]**	○	5×30	ø1/4	VPMD4x30-4E[7]-1/4J**	—	
			ø3	VPMD5x10-4E[7]-3J	—		ø1/8	VPMD5x10-4E[7]-1/8J	—	
		6×10	ø4	VPMD5x10-4E[7]-4J[3]	○	6×10	ø5/32	VPMD5x10-4E[7]-5/32J[3]	○	
			ø6	VPMD5x10-4E[7]-6J[3]	○		ø1/4	VPMD5x10-4E[7]-1/4J	—	
		6×20	ø3	VPMD5x20-4E[7]-3J	—	6×20	ø1/8	VPMD5x20-4E[7]-1/8J	—	
			ø4	VPMD5x20-4E[7]-4J[3]	○		ø5/32	VPMD5x20-4E[7]-5/32J[3]	○	
		6×30	ø6	VPMD5x20-4E[7]-6J[3]	○	6×30	ø1/4	VPMD5x20-4E[7]-1/4J	—	
			ø3	VPMD5x30-4E[7]-3J	—		ø1/8	VPMD5x30-4E[7]-1/8J	—	
		8×20	ø4	VPMD5x30-4E[7]-4J[3]	○	8×20	ø5/32	VPMD5x30-4E[7]-5/32J[3]	○	
			ø6	VPMD5x30-4E[7]-6J[3]	○		ø1/4	VPMD5x30-4E[7]-1/4J	—	
8×30	ø3	VPMD6x10-4E[7]-3J	—	8×30	ø1/8	VPMD6x10-4E[7]-1/8J	—			
	ø4	VPMD6x10-4E[7]-4J[3]	○		ø5/32	VPMD6x10-4E[7]-5/32J[3]	○			
8×20	ø6	VPMD6x10-4E[7]-6J[3]	○	8×20	ø1/4	VPMD6x10-4E[7]-1/4J	—			
	ø3	VPMD6x20-4E[7]-3J	—		ø1/8	VPMD6x20-4E[7]-1/8J	—			
8×20	ø4	VPMD6x20-4E[7]-4J[3]	○	8×20	ø5/32	VPMD6x20-4E[7]-5/32J[3]	○			
	ø6	VPMD6x20-4E[7]-6J[3]	○		ø1/4	VPMD6x20-4E[7]-1/4J	—			
8×30	ø3	VPMD6x30-4E[7]-3J	—	8×30	ø1/8	VPMD6x30-4E[7]-1/8J	—			
	ø4	VPMD6x30-4E[7]-4J[3]	○		ø5/32	VPMD6x30-4E[7]-5/32J[3]	○			
8×30	ø6	VPMD6x30-4E[7]-6J[3]	○	8×30	ø1/4	VPMD6x30-4E[7]-1/4J	—			
	ø3	VPMD8x20-4E[7]-3J	—		ø1/8	VPMD8x20-4E[7]-1/8J	—			
8×20	ø4	VPMD8x20-4E[7]-4J[3]	○	8×20	ø5/32	VPMD8x20-4E[7]-5/32J[3]	○			
	ø6	VPMD8x20-4E[7]-6J[3]	○		ø1/4	VPMD8x20-4E[7]-1/4J	—			
8×30	ø3	VPMD8x30-4E[7]-3J	—	8×30	ø1/8	VPMD8x30-4E[7]-1/8J	—			
	ø4	VPMD8x30-4E[7]-4J[3]	○		ø5/32	VPMD8x30-4E[7]-5/32J[3]	○			
8×30	ø6	VPMD8x30-4E[7]-6J[3]	○	8×30	ø1/4	VPMD8x30-4E[7]-1/4J	—			
	ø3	VPMD8x40-4E[7]-3J	—		ø1/8	VPMD8x40-4E[7]-1/8J	—			
8×20	ø4	VPMD8x40-4E[7]-4J[3]	○	8×20	ø5/32	VPMD8x40-4E[7]-5/32J[3]	○			
	ø6	VPMD8x40-4E[7]-6J[3]	○		ø1/4	VPMD8x40-4E[7]-1/4J	—			
8×30	ø3	VPMD8x50-4E[7]-3J	—	8×30	ø1/8	VPMD8x50-4E[7]-1/8J	—			
	ø4	VPMD8x50-4E[7]-4J[3]	○		ø5/32	VPMD8x50-4E[7]-5/32J[3]	○			
8×30	ø6	VPMD8x50-4E[7]-6J[3]	○	8×30	ø1/4	VPMD8x50-4E[7]-1/4J	—			
	ø3	VPMD10x20-4E[7]-3J	—		ø1/8	VPMD10x20-4E[7]-1/8J	—			
8×20	ø4	VPMD10x20-4E[7]-4J[3]	○	8×20	ø5/32	VPMD10x20-4E[7]-5/32J[3]	○			
	ø6	VPMD10x20-4E[7]-6J[3]	○		ø1/4	VPMD10x20-4E[7]-1/4J	—			
8×30	ø3	VPMD10x30-4E[7]-3J	—	8×30	ø1/8	VPMD10x30-4E[7]-1/8J	—			
	ø4	VPMD10x30-4E[7]-4J[3]	○		ø5/32	VPMD10x30-4E[7]-5/32J[3]	○			
8×30	ø6	VPMD10x30-4E[7]-6J[3]	○	8×30	ø1/4	VPMD10x30-4E[7]-1/4J	—			
	ø3	VPMD10x40-4E[7]-3J	—		ø1/8	VPMD10x40-4E[7]-1/8J	—			
8×20	ø4	VPMD10x40-4E[7]-4J[3]	○	8×20	ø5/32	VPMD10x40-4E[7]-5/32J[3]	○			
	ø6	VPMD10x40-4E[7]-6J[3]	○		ø1/4	VPMD10x40-4E[7]-1/4J	—			
8×30	ø3	VPMD10x50-4E[7]-3J	—	8×30	ø1/8	VPMD10x50-4E[7]-1/8J	—			
	ø4	VPMD10x50-4E[7]-4J[3]	○		ø5/32	VPMD10x50-4E[7]-5/32J[3]	○			
8×30	ø6	VPMD10x50-4E[7]-6J[3]	○	8×30	ø1/4	VPMD10x50-4E[7]-1/4J	—			
	ø3	VPMD12x20-4E[7]-3J	—		ø1/8	VPMD12x20-4E[7]-1/8J	—			
8×20	ø4	VPMD12x20-4E[7]-4J[3]	○	8×20	ø5/32	VPMD12x20-4E[7]-5/32J[3]	○			
	ø6	VPMD12x20-4E[7]-6J[3]	○		ø1/4	VPMD12x20-4E[7]-1/4J	—			
8×30	ø3	VPMD12x30-4E[7]-3J	—	8×30	ø1/8	VPMD12x30-4E[7]-1/8J	—			
	ø4	VPMD12x30-4E[7]-4J[3]	○		ø5/32	VPMD12x30-4E[7]-5/32J[3]	○			
8×30	ø6	VPMD12x30-4E[7]-6J[3]	○	8×30	ø1/4	VPMD12x30-4E[7]-1/4J	—			
	ø3	VPMD12x40-4E[7]-3J	—		ø1/8	VPMD12x40-4E[7]-1/8J	—			
8×20	ø4	VPMD12x40-4E[7]-4J[3]	○	8×20	ø5/32	VPMD12x40-4E[7]-5/32J[3]	○			
	ø6	VPMD12x40-4E[7]-6J[3]	○		ø1/4	VPMD12x40-4E[7]-1/4J	—			
8×30	ø3	VPMD12x50-4E[7]-3J	—	8×30	ø1/8	VPMD12x50-4E[7]-1/8J	—			
	ø4	VPMD12x50-4E[7]-4J[3]	○		ø5/32	VPMD12x50-4E[7]-5/32J[3]	○			
8×30	ø6	VPMD12x50-4E[7]-6J[3]	○	8×30	ø1/4	VPMD12x50-4E[7]-1/4J	—			
	ø3	VPMD14x20-4E[7]-3J	—		ø1/8	VPMD14x20-4E[7]-1/8J	—			
8×20	ø4	VPMD14x20-4E[7]-4J[3]	○	8×20	ø5/32	VPMD14x20-4E[7]-5/32J[3]	○			
	ø6	VPMD14x20-4E[7]-6J[3]	○		ø1/4	VPMD14x20-4E[7]-1/4J	—			
8×30	ø3	VPMD14x30-4E[7]-3J	—	8×30	ø1/8	VPMD14x30-4E[7]-1/8J	—			
	ø4	VPMD14x30-4E[7]-4J[3]	○		ø5/32	VPMD14x30-4E[7]-5/32J[3]	○			
8×30	ø6	VPMD14x30-4E[7]-6J[3]	○	8×30	ø1/4	VPMD14x30-4E[7]-1/4J	—			
	ø3	VPMD14x40-4E[7]-3J	—		ø1/8	VPMD14x40-4E[7]-1/8J	—			
8×20	ø4	VPMD14x40-4E[7]-4J[3]	○	8×20	ø5/32	VPMD14x40-4E[7]-5/32J[3]	○			
	ø6	VPMD14x40-4E[7]-6J[3]	○		ø1/4	VPMD14x40-4E[7]-1/4J	—			
8×30	ø3	VPMD14x50-4E[7]-3J	—	8×30	ø1/8	VPMD14x50-4E[7]-1/8J	—			
	ø4	VPMD14x50-4E[7]-4J[3]	○		ø5/32	VPMD14x50-4E[7]-5/32J[3]	○			
8×30	ø6	VPMD14x50-4E[7]-6J[3]	○	8×30	ø1/4	VPMD14x50-4E[7]-1/4J	—			
	ø3	VPMD16x20-4E[7]-3J	—		ø1/8	VPMD16x20-4E[7]-1/8J	—			
8×20	ø4	VPMD16x20-4E[7]-4J[3]	○	8×20	ø5/32	VPMD16x20-4E[7]-5/32J[3]	○			
	ø6	VPMD16x20-4E[7]-6J[3]	○		ø1/4	VPMD16x20-4E[7]-1/4J	—			
8×30	ø3	VPMD16x30-4E[7]-3J	—	8×30	ø1/8	VPMD16x30-4E[7]-1/8J	—			
	ø4	VPMD16x30-4E[7]-4J[3]	○		ø5/32	VPMD16x30-4E[7]-5/32J[3]	○			
8×30	ø6	VPMD16x30-4E[7]-6J[3]	○	8×30	ø1/4	VPMD16x30-4E[7]-1/4J	—			
	ø3	VPMD16x40-4E[7]-3J	—		ø1/8	VPMD16x40-4E[7]-1/8J	—			
8×20	ø4	VPMD16x40-4E[7]-4J[3]	○	8×20	ø5/32	VPMD16x40-4E[7]-5/32J[3]	○			
	ø6	VPMD16x40-4E[7]-6J[3]	○		ø1/4	VPMD16x40-4E[7]-1/4J	—			
8×30	ø3	VPMD16x50-4E[7]-3J	—	8×30	ø1/8	VPMD16x50-4E[7]-1/8J	—			
	ø4	VPMD16x50-4E[7]-4J[3]	○		ø5/32	VPMD16x50-4E[7]-5/32J[3]	○			
8×30	ø6	VPMD16x50-4E[7]-6J[3]	○	8×30	ø1/4	VPMD16x50-4E[7]-1/4J	—			
	ø3	VPMD18x20-4E[7]-3J	—		ø1/8	VPMD18x20-4E[7]-1/8J	—			
8×20	ø4	VPMD18x20-4E[7]-4J[3]	○	8×20	ø5/32	VPMD18x20-4E[7]-5/32J[3]	○			
	ø6	VPMD18x20-4E[7]-6J[3]	○		ø1/4	VPMD18x20-4E[7]-1/4J	—			
8×30	ø3	VPMD18x30-4E[7]-3J	—	8×30	ø1/8	VPMD18x30-4E[7]-1/8J	—			
	ø4	VPMD18x30-4E[7]-4J[3]	○		ø5/32	VPMD18x30-4E[7]-5/32J[3]	○			
8×30	ø6	VPMD18x30-4E[7]-6J[3]	○	8×30	ø1/4	VPMD18x30-4E[7]-1/4J	—			
	ø3	VPMD18x40-4E[7]-3J	—		ø1/8	VPMD18x40-4E[7]-1/8J	—			
8×20	ø4	VPMD18x40-4E[7]-4J[3]	○	8×20	ø5/32	VPMD18x40-4E[7]-5/32J[3]	○			
	ø6	VPMD18x40-4E[7]-6J[3]	○		ø1/4	VPMD18x40-4E[7]-1/4J	—			
8×30	ø3	VPMD18x50-4E[7]-3J	—	8×30	ø1/8	VPMD18x50-4E[7]-1/8J	—			
	ø4	VPMD18x50-4E[7]-4J[3]	○		ø5/32	VPMD18x50-4E[7]-5/32J[3]	○			
8×30	ø6	VPMD18x50-4E[7]-6J[3]	○	8×30	ø1/4	VPMD18x50-4E[7]-1/4J	—			
	ø3	VPMD20x20-4E[7]-3J	—		ø1/8	VPMD20x20-4E[7]-1/8J	—			
8×20	ø4	VPMD20x20-4E[7]-4J[3]	○	8×20	ø5/32	VPMD20x20-4E[7]-5/32J[3]	○			
	ø6	VPMD20x20-4E[7]-6J[3]	○		ø1/4	VPMD20x20-4E[7]-1/4J	—			
8×30	ø3	VPMD20x30-4E[7]-3J	—	8×30	ø1/8	VPMD20x30-4E[7]-1/8J	—			
	ø4	VPMD20x30-4E[7]-4J[3]	○		ø5/32	VPMD20x30-4E[7]-5/32J[3]	○			
8×30	ø6	VPMD20x30-4E[7]-6J[3]	○	8×30	ø1/4	VPMD20x30-4E[7]-1/4J	—			
	ø3	VPMD20x40-4E[7]-3J	—		ø1/8	VPMD20x40-4E[7]-1/8J	—			
8×20	ø4	VPMD20x40-4E[7]-4J[3]	○	8×20	ø5/32	VPMD20x40-4E[7]-5/32J[3]	○			
	ø6	VPMD20x40-4E[7]-6J[3]	○		ø1/4	VPMD20x40-4E[7]-1/4J	—			
8×30	ø3	VPMD20x50-4E[7]-3J	—	8×30	ø1/8	VPMD20x50-4E[7]-1/8J	—			
	ø4	VPMD20x50-4E[7]-4J[3]	○		ø5/32	VPMD20x50-4E[7]-5/32J[3]	○			
8×30	ø6	VPMD20x50-4E[7]-6J[3]	○	8×30	ø1/4	VPMD20x50-4E[7]-1/4J	—			
	ø3	VPMD22x20-4E[7]-3J	—		ø1/8	VPMD22x20-4E[7]-1/8J	—			
8×20	ø4	VPMD22x20-4E[7]-4J[3]	○	8×20	ø5/32	VPMD22x20-4E[7]-5/32J[3]	○			
	ø6	VPMD22x20-4E[7]-6J[3]	○		ø1/4	VPMD22x20-4E[7]-1/4J	—			
8×30	ø3	VPMD22x30-4E[7]-3J	—	8×30	ø1/8	VPMD22x30-4E[7]-1/8J	—			
	ø4	VPMD22x30-4E[7]-4J[3]	○		ø5/32	VPMD22x30-4E[7]-5/32J[3]	○			
8×30	ø6	VPMD22x30-4E[7]-6J[3]	○	8×30	ø1/4	VPMD22x30-4E[7]-1/4J	—			
	ø3	VPMD22x40-4E[7]-3J	—		ø1/8	VPMD22x40-4E[7]-1/8J	—			
8×20	ø4	VPMD22x40-4E[7]-4J[3]	○	8×20	ø5/32	VPMD22x40-4E[7]-5/32J[3]	○			
	ø6	VPMD22x40-4E[7]-6J[3]	○		ø1/4	VPMD22x40-4E[7]-1/4J	—			
8×30	ø3	VPMD22x50-4E[7]-3J	—	8×30	ø1/8	VPMD22x50-4E[7]-1/8J	—			
	ø4	VPMD22x50-4E[7]-4J[3]	○		ø5/32	VPMD22x50-4E[7]-5/32J[3]	○			
8×30	ø6	VPMD22x50-4E[7]-6J[3]	○	8×30	ø1/4	VPMD22x50-4E[7]-1/4J	—			
	ø3	VPMD24x20-4E[7]-3J	—		ø1/8	VPMD24x20-4E[7]-1/8J	—			
8×20	ø4	VPMD24x20-4E[7]-4J[3]	○	8×20	ø5/32	VPMD24x20-4E[7]-5/32J[3]	○			
	ø6	VPMD24x20-4E[7]-6J[3]	○		ø1/4	VPMD24x20-4E[7]-1/4J	—			
8×30	ø3	VPMD24x30-4E[7]-3J	—	8×30	ø1/8	VPMD24x30-4E[7]-1/8J	—			
	ø4	VPMD24x30-4E[7]-4J[3]	○		ø5/32	VPMD24x30-4E[7]-5/32J[3]	○			
8×30	ø6	VPMD24x30-4E[7]-6J[3]	○	8×30	ø1/4	VPMD24x30-4E[7]-1/4J	—			
	ø3	VPMD24x40-4E[7]-3J	—		ø1/8	VPMD24x40-4E[7]-1/8J	—			
8×20	ø4	VPMD24x40-4E[7]-4J[3]	○	8×20	ø5/32	VPMD24x40-4E[7]-5/32J[3]	○			
	ø6	VPMD24x40-4E[7]-6J[3]	○		ø1/4	VPMD24x40-4E[7]-				

RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad size (A×B) (mm)	Stroke (mm)	Tube O.D. (mm)	Model code	13 -S3 spec.	Connection config. code	Pad size (A×B) (mm)	Stroke (mm)	Tube O.D. (inch)	Model code	13 -S3 -S3 spec.	Connection config. code						
Spring type, Side port, Push-in fitting, Standard  Pad size 2×4 _{mm} to 4×30 _{mm}	2×4	6	ø3	VPD2x4-6E617-3J9	—	2×4	6	ø1/8	VPD2x4-6E617-1/4J9	—	2×4	6	ø5/32	VPD2x4-6E617-4/32J9	—			
			ø4	VPD2x4-6E617-4J9	○			ø1/4	VPD2x4-6E617-1/4J9	—			ø1/4	VPD2x4-6E617-1/4J9	—			
		10	ø3	VPD2x4-10E617-3J9	—		10	ø1/8	VPD2x4-10E617-1/4J9	—		10	ø5/32	VPD2x4-10E617-4/32J9	—			
			ø4	VPD2x4-10E617-4J9	—			ø1/4	VPD2x4-10E617-1/4J9	—			ø1/4	VPD2x4-10E617-1/4J9	—			
		15	ø3	VPD2x4-15E617-3J9	—		15	ø1/8	VPD2x4-15E617-1/4J9	—		15	ø5/32	VPD2x4-15E617-4/32J9	—			
			ø4	VPD2x4-15E617-4J9	—			ø1/4	VPD2x4-15E617-1/4J9	—			ø1/4	VPD2x4-15E617-1/4J9	—			
		20	ø3	VPD2x4-20E617-3J9	—		20	ø1/8	VPD2x4-20E617-1/4J9	—		20	ø5/32	VPD2x4-20E617-4/32J9	—			
			ø4	VPD2x4-20E617-4J9	—			ø1/4	VPD2x4-20E617-1/4J9	—			ø1/4	VPD2x4-20E617-1/4J9	—			
		3.5×7	6	ø3	VPD3.5x7-6E617-3J9		—	3.5×7	6	ø1/8		VPD3.5x7-6E617-1/4J9	—	3.5×7	6	ø5/32	VPD3.5x7-6E617-4/32J9	—
				ø4	VPD3.5x7-6E617-4J9		○			ø1/4		VPD3.5x7-6E617-1/4J9	—			ø1/4	VPD3.5x7-6E617-1/4J9	—
			10	ø3	VPD3.5x7-10E617-3J9		—		10	ø1/8		VPD3.5x7-10E617-1/4J9	—		10	ø5/32	VPD3.5x7-10E617-4/32J9	—
				ø4	VPD3.5x7-10E617-4J9		—			ø1/4		VPD3.5x7-10E617-1/4J9	—			ø1/4	VPD3.5x7-10E617-1/4J9	—
	15		ø3	VPD3.5x7-15E617-3J9	—	15	ø1/8		VPD3.5x7-15E617-1/4J9	—	15	ø5/32	VPD3.5x7-15E617-4/32J9		—			
			ø4	VPD3.5x7-15E617-4J9	—		ø1/4		VPD3.5x7-15E617-1/4J9	—		ø1/4	VPD3.5x7-15E617-1/4J9		—			
	20		ø3	VPD3.5x7-20E617-3J9	—	20	ø1/8		VPD3.5x7-20E617-1/4J9	—	20	ø5/32	VPD3.5x7-20E617-4/32J9		—			
			ø4	VPD3.5x7-20E617-4J9	—		ø1/4		VPD3.5x7-20E617-1/4J9	—		ø1/4	VPD3.5x7-20E617-1/4J9		—			
	4×10		6	ø3	VPD4x10-6E617-3J9	—	4×10		6	ø1/8	VPD4x10-6E617-1/4J9	—	4×10		6	ø5/32	VPD4x10-6E617-4/32J9	—
				ø4	VPD4x10-6E617-4J9	○				ø1/4	VPD4x10-6E617-1/4J9	—				ø1/4	VPD4x10-6E617-1/4J9	—
			10	ø3	VPD4x10-10E617-3J9	—			10	ø1/8	VPD4x10-10E617-1/4J9	—			10	ø5/32	VPD4x10-10E617-4/32J9	—
				ø4	VPD4x10-10E617-4J9	—				ø1/4	VPD4x10-10E617-1/4J9	—				ø1/4	VPD4x10-10E617-1/4J9	—
		15	ø3	VPD4x10-15E617-3J9	—	15		ø1/8	VPD4x10-15E617-1/4J9	—	15	ø5/32		VPD4x10-15E617-4/32J9	—			
			ø4	VPD4x10-15E617-4J9	—			ø1/4	VPD4x10-15E617-1/4J9	—		ø1/4		VPD4x10-15E617-1/4J9	—			
		20	ø3	VPD4x10-20E617-3J9	—	20		ø1/8	VPD4x10-20E617-1/4J9	—	20	ø5/32		VPD4x10-20E617-4/32J9	—			
			ø4	VPD4x10-20E617-4J9	—			ø1/4	VPD4x10-20E617-1/4J9	—		ø1/4		VPD4x10-20E617-1/4J9	—			
		4×20	6	ø3	VPD4x20-6E617-3J9	—		4×20	6	ø1/8	VPD4x20-6E617-1/4J9	—		4×20	6	ø5/32	VPD4x20-6E617-4/32J9	—
				ø4	VPD4x20-6E617-4J9	○				ø1/4	VPD4x20-6E617-1/4J9	—				ø1/4	VPD4x20-6E617-1/4J9	—
			10	ø3	VPD4x20-10E617-3J9	—			10	ø1/8	VPD4x20-10E617-1/4J9	—			10	ø5/32	VPD4x20-10E617-4/32J9	—
				ø4	VPD4x20-10E617-4J9	—				ø1/4	VPD4x20-10E617-1/4J9	—				ø1/4	VPD4x20-10E617-1/4J9	—
	15		ø3	VPD4x20-15E617-3J9	—	15	ø1/8		VPD4x20-15E617-1/4J9	—	15	ø5/32	VPD4x20-15E617-4/32J9		—			
			ø4	VPD4x20-15E617-4J9	—		ø1/4		VPD4x20-15E617-1/4J9	—		ø1/4	VPD4x20-15E617-1/4J9		—			
	20		ø3	VPD4x20-20E617-3J9	—	20	ø1/8		VPD4x20-20E617-1/4J9	—	20	ø5/32	VPD4x20-20E617-4/32J9		—			
			ø4	VPD4x20-20E617-4J9	—		ø1/4		VPD4x20-20E617-1/4J9	—		ø1/4	VPD4x20-20E617-1/4J9		—			
	4×30		6	ø3	VPD4x30-6E617-3J9 [※]	—	4×30		6	ø1/8	VPD4x30-6E617-1/4J9 [※]	—	4×30		6	ø5/32	VPD4x30-6E617-4/32J9 [※]	—
				ø4	VPD4x30-6E617-4J9 [※]	○				ø1/4	VPD4x30-6E617-1/4J9 [※]	—				ø1/4	VPD4x30-6E617-1/4J9 [※]	—
			10	ø3	VPD4x30-10E617-3J9 [※]	—			10	ø1/8	VPD4x30-10E617-1/4J9 [※]	—			10	ø5/32	VPD4x30-10E617-4/32J9 [※]	—
				ø4	VPD4x30-10E617-4J9 [※]	—				ø1/4	VPD4x30-10E617-1/4J9 [※]	—				ø1/4	VPD4x30-10E617-1/4J9 [※]	—
15		ø3	VPD4x30-15E617-3J9 [※]	—	15	ø1/8		VPD4x30-15E617-1/4J9 [※]	—	15	ø5/32	VPD4x30-15E617-4/32J9 [※]		—				
		ø4	VPD4x30-15E617-4J9 [※]	—		ø1/4		VPD4x30-15E617-1/4J9 [※]	—		ø1/4	VPD4x30-15E617-1/4J9 [※]		—				
20		ø3	VPD4x30-20E617-3J9 [※]	—	20	ø1/8		VPD4x30-20E617-1/4J9 [※]	—	20	ø5/32	VPD4x30-20E617-4/32J9 [※]		—				
		ø4	VPD4x30-20E617-4J9 [※]	—		ø1/4		VPD4x30-20E617-1/4J9 [※]	—		ø1/4	VPD4x30-20E617-1/4J9 [※]		—				

RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad size (A×B) (mm)	Stroke (mm)	Tube O.D. (mm)	Model code	13 -S3 spec.	Connection config. code	Pad size (A×B) (mm)	Stroke (mm)	Tube O.D. (inch)	Model code	13 -S3 spec.	Connection config. code						
Spring type, Side port, Push-in fitting, Standard  Pad size 5×10mm to 5×30mm	5 × 10	6	ø3	VPD5x10-6E617-3J9	—	5 × 10	6	ø1/8	VPD5x10-6E617-1/4J9	—	5 × 10	6	ø5/32	VPD5x10-6E617-4/32J9	—			
			ø4	VPD5x10-6E617-4J9	○			ø1/4	VPD5x10-6E617-1/4J9	—			ø1/4	VPD5x10-6E617-1/4J9	—			
		10	ø3	VPD5x10-10E617-3J9	—		10	ø1/8	VPD5x10-10E617-1/4J9	—		10	ø5/32	VPD5x10-10E617-4/32J9	—			
			ø4	VPD5x10-10E617-4J9	—			ø1/4	VPD5x10-10E617-1/4J9	—			ø1/4	VPD5x10-10E617-1/4J9	—			
		15	ø3	VPD5x10-15E617-3J9	—		15	ø1/8	VPD5x10-15E617-1/4J9	—		15	ø5/32	VPD5x10-15E617-4/32J9	—			
			ø4	VPD5x10-15E617-4J9	—			ø1/4	VPD5x10-15E617-1/4J9	—			ø1/4	VPD5x10-15E617-1/4J9	—			
		20	ø3	VPD5x10-20E617-3J9	—		20	ø1/8	VPD5x10-20E617-1/4J9	—		20	ø5/32	VPD5x10-20E617-4/32J9	—			
			ø4	VPD5x10-20E617-4J9	—			ø1/4	VPD5x10-20E617-1/4J9	—			ø1/4	VPD5x10-20E617-1/4J9	—			
		5 × 20	6	ø3	VPD5x20-6E617-3J9		—	5 × 20	6	ø1/8		VPD5x20-6E617-1/4J9	—	5 × 20	6	ø5/32	VPD5x20-6E617-4/32J9	—
				ø4	VPD5x20-6E617-4J9		○			ø1/4		VPD5x20-6E617-1/4J9	—			ø1/4	VPD5x20-6E617-1/4J9	—
			10	ø3	VPD5x20-10E617-3J9		—		10	ø1/8		VPD5x20-10E617-1/4J9	—		10	ø5/32	VPD5x20-10E617-4/32J9	—
				ø4	VPD5x20-10E617-4J9		—			ø1/4		VPD5x20-10E617-1/4J9	—			ø1/4	VPD5x20-10E617-1/4J9	—
	15		ø3	VPD5x20-15E617-3J9	—	15	ø1/8		VPD5x20-15E617-1/4J9	—	15	ø5/32	VPD5x20-15E617-4/32J9		—			
			ø4	VPD5x20-15E617-4J9	—		ø1/4		VPD5x20-15E617-1/4J9	—		ø1/4	VPD5x20-15E617-1/4J9		—			
	20		ø3	VPD5x20-20E617-3J9	—	20	ø1/8		VPD5x20-20E617-1/4J9	—	20	ø5/32	VPD5x20-20E617-4/32J9		—			
			ø4	VPD5x20-20E617-4J9	—		ø1/4		VPD5x20-20E617-1/4J9	—		ø1/4	VPD5x20-20E617-1/4J9		—			
	5 × 30		6	ø3	VPD5x30-6E617-3J9	—	5 × 30		6	ø1/8	VPD5x30-6E617-1/4J9	—	5 × 30		6	ø5/32	VPD5x30-6E617-4/32J9	—
				ø4	VPD5x30-6E617-4J9	○				ø1/4	VPD5x30-6E617-1/4J9	—				ø1/4	VPD5x30-6E617-1/4J9	—
			10	ø3	VPD5x30-10E617-3J9	—			10	ø1/8	VPD5x30-10E617-1/4J9	—			10	ø5/32	VPD5x30-10E617-4/32J9	—
				ø4	VPD5x30-10E617-4J9	—				ø1/4	VPD5x30-10E617-1/4J9	—				ø1/4	VPD5x30-10E617-1/4J9	—
		15	ø3	VPD5x30-15E617-3J9	—	15		ø1/8	VPD5x30-15E617-1/4J9	—	15	ø5/32		VPD5x30-15E617-4/32J9	—			
			ø4	VPD5x30-15E617-4J9	—			ø1/4	VPD5x30-15E617-1/4J9	—		ø1/4		VPD5x30-15E617-1/4J9	—			
		20	ø3	VPD5x30-20E617-3J9	—	20		ø1/8	VPD5x30-20E617-1/4J9	—	20	ø5/32		VPD5x30-20E617-4/32J9	—			
			ø4	VPD5x30-20E617-4J9	—			ø1/4	VPD5x30-20E617-1/4J9	—		ø1/4		VPD5x30-20E617-1/4J9	—			

RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad size (A×B) (mm)	Stroke (mm)	Tube O.D. (mm)	Model code	13 -S3 spec.	Connection config. code	Pad size (A×B) (mm)	Stroke (mm)	Tube O.D. (inch)	Model code	13 -S3 spec.	Connection config. code			
Spring type, Side port, Push-in fitting, Standard  Pad size 6×10mm to 8×30mm	6×10	6	ø3	VPD6x10-6E617-3J9	—	6×10	6	ø1/8	VPD6x10-6E617-1/4J9	—	6×10	6	ø5/32	VPD6x10-6E617-4/16J9	○
			ø4	VPD6x10-6E617-4J9	—			ø1/4	VPD6x10-6E617-1/4J9	—			ø1/8	VPD6x10-10E617-1/4J9	—
			ø6	VPD6x10-6E617-6J9	○			ø1/4	VPD6x10-6E617-1/4J9	—			ø5/32	VPD6x10-10E617-4/16J9	—
		10	ø3	VPD6x10-10E617-3J9	—			ø1/8	VPD6x10-10E617-1/4J9	—			ø1/4	VPD6x10-10E617-1/4J9	—
			ø4	VPD6x10-10E617-4J9	—			ø5/32	VPD6x10-10E617-4/16J9	—			ø1/8	VPD6x10-15E617-1/4J9	—
			ø6	VPD6x10-10E617-6J9	—			ø1/4	VPD6x10-10E617-1/4J9	—			ø5/32	VPD6x10-15E617-4/16J9	—
		15	ø3	VPD6x10-15E617-3J9	—			ø1/8	VPD6x10-15E617-1/4J9	—			ø1/4	VPD6x10-15E617-1/4J9	—
			ø4	VPD6x10-15E617-4J9	—			ø5/32	VPD6x10-15E617-4/16J9	—			ø1/8	VPD6x10-20E617-1/4J9	—
			ø6	VPD6x10-15E617-6J9	—			ø1/4	VPD6x10-15E617-1/4J9	—			ø5/32	VPD6x10-20E617-4/16J9	—
		20	ø3	VPD6x10-20E617-3J9	—			ø1/8	VPD6x10-20E617-1/4J9	—			ø1/4	VPD6x10-20E617-1/4J9	—
			ø4	VPD6x10-20E617-4J9	—			ø5/32	VPD6x10-20E617-4/16J9	—			ø1/8	VPD6x10-20E617-1/4J9	—
			ø6	VPD6x10-20E617-6J9	—			ø1/4	VPD6x10-20E617-1/4J9	—			ø5/32	VPD6x10-20E617-4/16J9	—
	6×20	6	ø3	VPD6x20-6E617-3J9	—	6×20	6	ø1/8	VPD6x20-6E617-1/4J9	—	6×20	6	ø5/32	VPD6x20-6E617-4/16J9	○
			ø4	VPD6x20-6E617-4J9	○			ø1/4	VPD6x20-6E617-1/4J9	—			ø1/8	VPD6x20-10E617-1/4J9	—
			ø6	VPD6x20-6E617-6J9	○			ø1/4	VPD6x20-6E617-1/4J9	—			ø5/32	VPD6x20-10E617-4/16J9	—
		10	ø3	VPD6x20-10E617-3J9	—			ø1/8	VPD6x20-10E617-1/4J9	—			ø1/4	VPD6x20-10E617-1/4J9	—
			ø4	VPD6x20-10E617-4J9	—			ø5/32	VPD6x20-10E617-4/16J9	—			ø1/8	VPD6x20-15E617-1/4J9	—
			ø6	VPD6x20-10E617-6J9	—			ø1/4	VPD6x20-10E617-1/4J9	—			ø5/32	VPD6x20-15E617-4/16J9	—
		15	ø3	VPD6x20-15E617-3J9	—			ø1/8	VPD6x20-15E617-1/4J9	—			ø1/4	VPD6x20-15E617-1/4J9	—
			ø4	VPD6x20-15E617-4J9	—			ø5/32	VPD6x20-15E617-4/16J9	—			ø1/8	VPD6x20-20E617-1/4J9	—
			ø6	VPD6x20-15E617-6J9	—			ø1/4	VPD6x20-15E617-1/4J9	—			ø5/32	VPD6x20-20E617-4/16J9	—
		20	ø3	VPD6x20-20E617-3J9	—			ø1/8	VPD6x20-20E617-1/4J9	—			ø1/4	VPD6x20-20E617-1/4J9	—
			ø4	VPD6x20-20E617-4J9	—			ø5/32	VPD6x20-20E617-4/16J9	—			ø1/8	VPD6x20-20E617-1/4J9	—
			ø6	VPD6x20-20E617-6J9	—			ø1/4	VPD6x20-20E617-1/4J9	—			ø5/32	VPD6x20-20E617-4/16J9	—
	6×30	6	ø3	VPD6x30-6E617-3J9	—	6×30	6	ø1/8	VPD6x30-6E617-1/4J9	—	6×30	6	ø5/32	VPD6x30-6E617-4/16J9	○
			ø4	VPD6x30-6E617-4J9	○			ø1/4	VPD6x30-6E617-1/4J9	—			ø1/8	VPD6x30-10E617-1/4J9	—
			ø6	VPD6x30-6E617-6J9	○			ø1/4	VPD6x30-6E617-1/4J9	—			ø5/32	VPD6x30-10E617-4/16J9	—
		10	ø3	VPD6x30-10E617-3J9	—			ø1/8	VPD6x30-10E617-1/4J9	—			ø1/4	VPD6x30-10E617-1/4J9	—
			ø4	VPD6x30-10E617-4J9	—			ø5/32	VPD6x30-10E617-4/16J9	—			ø1/8	VPD6x30-15E617-1/4J9	—
			ø6	VPD6x30-10E617-6J9	—			ø1/4	VPD6x30-10E617-1/4J9	—			ø5/32	VPD6x30-15E617-4/16J9	—
		15	ø3	VPD6x30-15E617-3J9	—			ø1/8	VPD6x30-15E617-1/4J9	—			ø1/4	VPD6x30-15E617-1/4J9	—
			ø4	VPD6x30-15E617-4J9	—			ø5/32	VPD6x30-15E617-4/16J9	—			ø1/8	VPD6x30-20E617-1/4J9	—
			ø6	VPD6x30-15E617-6J9	—			ø1/4	VPD6x30-15E617-1/4J9	—			ø5/32	VPD6x30-20E617-4/16J9	—
		20	ø3	VPD6x30-20E617-3J9	—			ø1/8	VPD6x30-20E617-1/4J9	—			ø1/4	VPD6x30-20E617-1/4J9	—
			ø4	VPD6x30-20E617-4J9	—			ø5/32	VPD6x30-20E617-4/16J9	—			ø1/8	VPD6x30-20E617-1/4J9	—
			ø6	VPD6x30-20E617-6J9	—			ø1/4	VPD6x30-20E617-1/4J9	—			ø5/32	VPD6x30-20E617-4/16J9	—
	8×20	6	ø3	VPD8x20-6E617-3J9	—	8×20	6	ø1/8	VPD8x20-6E617-1/4J9	—	8×20	6	ø5/32	VPD8x20-6E617-4/16J9	○
			ø4	VPD8x20-6E617-4J9	○			ø1/4	VPD8x20-6E617-1/4J9	—			ø1/8	VPD8x20-10E617-1/4J9	—
			ø6	VPD8x20-6E617-6J9	○			ø1/4	VPD8x20-6E617-1/4J9	—			ø5/32	VPD8x20-10E617-4/16J9	—
		10	ø3	VPD8x20-10E617-3J9	—			ø1/8	VPD8x20-10E617-1/4J9	—			ø1/4	VPD8x20-10E617-1/4J9	—
			ø4	VPD8x20-10E617-4J9	—			ø5/32	VPD8x20-10E617-4/16J9	—			ø1/8	VPD8x20-15E617-1/4J9	—
			ø6	VPD8x20-10E617-6J9	—			ø1/4	VPD8x20-10E617-1/4J9	—			ø5/32	VPD8x20-15E617-4/16J9	—
		15	ø3	VPD8x20-15E617-3J9	—			ø1/8	VPD8x20-15E617-1/4J9	—			ø1/4	VPD8x20-15E617-1/4J9	—
			ø4	VPD8x20-15E617-4J9	—			ø5/32	VPD8x20-15E617-4/16J9	—			ø1/8	VPD8x20-20E617-1/4J9	—
			ø6	VPD8x20-15E617-6J9	—			ø1/4	VPD8x20-15E617-1/4J9	—			ø5/32	VPD8x20-20E617-4/16J9	—
		20	ø3	VPD8x20-20E617-3J9	—			ø1/8	VPD8x20-20E617-1/4J9	—			ø1/4	VPD8x20-20E617-1/4J9	—
			ø4	VPD8x20-20E617-4J9	—			ø5/32	VPD8x20-20E617-4/16J9	—			ø1/8	VPD8x20-20E617-1/4J9	—
			ø6	VPD8x20-20E617-6J9	—			ø1/4	VPD8x20-20E617-1/4J9	—			ø5/32	VPD8x20-20E617-4/16J9	—
	8×30	6	ø3	VPD8x30-6E617-3J9	—	8×30	6	ø1/8	VPD8x30-6E617-1/4J9	—	8×30	6	ø5/32	VPD8x30-6E617-4/16J9	○
			ø4	VPD8x30-6E617-4J9	○			ø1/4	VPD8x30-6E617-1/4J9	—			ø1/8	VPD8x30-10E617-1/4J9	—
			ø6	VPD8x30-6E617-6J9	○			ø1/4	VPD8x30-6E617-1/4J9	—			ø5/32	VPD8x30-10E617-4/16J9	—
		10	ø3	VPD8x30-10E617-3J9	—			ø1/8	VPD8x30-10E617-1/4J9	—			ø1/4	VPD8x30-10E617-1/4J9	—
			ø4	VPD8x30-10E617-4J9	—			ø5/32	VPD8x30-10E617-4/16J9	—			ø1/8	VPD8x30-15E617-1/4J9	—
			ø6	VPD8x30-10E617-6J9	—			ø1/4	VPD8x30-10E617-1/4J9	—			ø5/32	VPD8x30-15E617-4/16J9	—
		15	ø3	VPD8x30-15E617-3J9	—			ø1/8	VPD8x30-15E617-1/4J9	—			ø1/4	VPD8x30-15E617-1/4J9	—
			ø4	VPD8x30-15E617-4J9	—			ø5/32	VPD8x30-15E617-4/16J9	—			ø1/8	VPD8x30-20E617-1/4J9	—
			ø6	VPD8x30-15E617-6J9	—			ø1/4	VPD8x30-15E617-1/4J9	—			ø5/32	VPD8x30-20E617-4/16J9	—
		20	ø3	VPD8x30-20E617-3J9	—			ø1/8	VPD8x30-20E617-1/4J9	—			ø1/4	VPD8x30-20E617-1/4J9	—
			ø4	VPD8x30-20E617-4J9	—			ø5/32	VPD8x30-20E617-4/16J9	—			ø1/8	VPD8x30-20E617-1/4J9	—
			ø6	VPD8x30-20E617-6J9	—			ø1/4	VPD8x30-20E617-1/4J9	—			ø5/32	VPD8x30-20E617-4/16J9	—

RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad size (A×B) (mm)	Stroke (mm)	Male thread size	Model code	13-S3 spec.	Connect config. code
Spring type, Side port, Female thread, Standard VPD 	2×4	6	M6×1	VPD2x4-6E617-M6913	○	M6
		10		VPD2x4-10E617-M69	—	
		15		VPD2x4-15E617-M69	—	
		20		VPD2x4-20E617-M69	—	
	3.5×7	6	M6×1	VPD3.5x7-6E617-M6913	○	
		10		VPD3.5x7-10E617-M69	—	
		15		VPD3.5x7-15E617-M69	—	
		20		VPD3.5x7-20E617-M69	—	
	4×10	6	M6×1	VPD4x10-6E617-M6913	○	
		10		VPD4x10-10E617-M69	—	
		15		VPD4x10-15E617-M69	—	
		20		VPD4x10-20E617-M69	—	
	4×20	6	M6×1	VPD4x20-6E617-M6913	○	
		10		VPD4x20-10E617-M69	—	
		15		VPD4x20-15E617-M69	—	
		20		VPD4x20-20E617-M69	—	
	4×30	6	M6×1	VPD4x30-6E617-M6913 ⁴	○	
		10		VPD4x30-10E617-M69 ⁴	—	
		15		VPD4x30-15E617-M69 ⁴	—	
		20		VPD4x30-20E617-M69 ⁴	—	
	5×10	6	M6×1	VPD5x10-6E617-M6913	○	
		10		VPD5x10-10E617-M69	—	
		15		VPD5x10-15E617-M69	—	
		20		VPD5x10-20E617-M69	—	
	5×20	6	M6×1	VPD5x20-6E617-M6913	○	
		10		VPD5x20-10E617-M69	—	
		15		VPD5x20-15E617-M69	—	
		20		VPD5x20-20E617-M69	—	
5×30	6	M6×1	VPD5x30-6E617-M6913	○		
	10		VPD5x30-10E617-M69	—		
	15		VPD5x30-15E617-M69	—		
	20		VPD5x30-20E617-M69	—		
6×10	6	M6×1	VPD6x10-6E617-M6913	○		
	10		VPD6x10-10E617-M69	—		
	15		VPD6x10-15E617-M69	—		
	20		VPD6x10-20E617-M69	—		
6×20	6	M6×1	VPD6x20-6E617-M6913	○		
	10		VPD6x20-10E617-M69	—		
	15		VPD6x20-15E617-M69	—		
	20		VPD6x20-20E617-M69	—		
6×30	6	M6×1	VPD6x30-6E617-M6913	○		
	10		VPD6x30-10E617-M69	—		
	15		VPD6x30-15E617-M69	—		
	20		VPD6x30-20E617-M69	—		
8×20	6	M6×1	VPD8x20-6E617-M6913	○		
	10		VPD8x20-10E617-M69	—		
	15		VPD8x20-15E617-M69	—		
	20		VPD8x20-20E617-M69	—		
8×30	6	M6×1	VPD8x30-6E617-M6913	○		
	10		VPD8x30-10E617-M69	—		
	15		VPD8x30-15E617-M69	—		
	20		VPD8x30-20E617-M69	—		

Vacuum Pad Oval Type

RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad size (A×B) (mm)	Stroke (mm)	Tube O.D. (mm)	Model code	Connection config. code	Pad size (A×B) (mm)	Stroke (mm)	Tube O.D. (inch)	Model code	Connection config. code
Spring type, Side port, Push-in fitting, No cover VPOD  Pad size 2×4mm to 4×30mm	2×4	20	ø3	VPOD2x4-20E617-1/J	2×4	2×4	20	ø1/8	VPOD2x4-20E617-1/J	
			ø4	VPOD2x4-20E617-4/J				ø5/32	VPOD2x4-20E617-4/J	
			ø6	VPOD2x4-20E617-6/J				ø1/4	VPOD2x4-20E617-1/J	
		30	ø3	VPOD2x4-30E617-1/J			30	ø1/8	VPOD2x4-30E617-1/J	
			ø4	VPOD2x4-30E617-4/J				ø5/32	VPOD2x4-30E617-4/J	
			ø6	VPOD2x4-30E617-6/J				ø1/4	VPOD2x4-30E617-1/J	
		40	ø3	VPOD2x4-40E617-1/J			40	ø1/8	VPOD2x4-40E617-1/J	
			ø4	VPOD2x4-40E617-4/J				ø5/32	VPOD2x4-40E617-4/J	
			ø6	VPOD2x4-40E617-6/J				ø1/4	VPOD2x4-40E617-1/J	
		50	ø3	VPOD2x4-50E617-1/J			50	ø1/8	VPOD2x4-50E617-1/J	
			ø4	VPOD2x4-50E617-4/J				ø5/32	VPOD2x4-50E617-4/J	
			ø6	VPOD2x4-50E617-6/J				ø1/4	VPOD2x4-50E617-1/J	
	3.5×7	20	ø3	VPOD3.5x7-20E617-1/J		3.5×7	20	ø1/8	VPOD3.5x7-20E617-1/J	
			ø4	VPOD3.5x7-20E617-4/J				ø5/32	VPOD3.5x7-20E617-4/J	
			ø6	VPOD3.5x7-20E617-6/J				ø1/4	VPOD3.5x7-20E617-1/J	
		30	ø3	VPOD3.5x7-30E617-1/J			30	ø1/8	VPOD3.5x7-30E617-1/J	
			ø4	VPOD3.5x7-30E617-4/J				ø5/32	VPOD3.5x7-30E617-4/J	
			ø6	VPOD3.5x7-30E617-6/J				ø1/4	VPOD3.5x7-30E617-1/J	
		40	ø3	VPOD3.5x7-40E617-1/J			40	ø1/8	VPOD3.5x7-40E617-1/J	
			ø4	VPOD3.5x7-40E617-4/J				ø5/32	VPOD3.5x7-40E617-4/J	
			ø6	VPOD3.5x7-40E617-6/J				ø1/4	VPOD3.5x7-40E617-1/J	
		50	ø3	VPOD3.5x7-50E617-1/J			50	ø1/8	VPOD3.5x7-50E617-1/J	
			ø4	VPOD3.5x7-50E617-4/J				ø5/32	VPOD3.5x7-50E617-4/J	
			ø6	VPOD3.5x7-50E617-6/J				ø1/4	VPOD3.5x7-50E617-1/J	
	4×10	20	ø3	VPOD4x10-20E617-1/J		4×10	20	ø1/8	VPOD4x10-20E617-1/J	
			ø4	VPOD4x10-20E617-4/J				ø5/32	VPOD4x10-20E617-4/J	
			ø6	VPOD4x10-20E617-6/J				ø1/4	VPOD4x10-20E617-1/J	
		30	ø3	VPOD4x10-30E617-1/J			30	ø1/8	VPOD4x10-30E617-1/J	
			ø4	VPOD4x10-30E617-4/J				ø5/32	VPOD4x10-30E617-4/J	
			ø6	VPOD4x10-30E617-6/J				ø1/4	VPOD4x10-30E617-1/J	
		40	ø3	VPOD4x10-40E617-1/J			40	ø1/8	VPOD4x10-40E617-1/J	
			ø4	VPOD4x10-40E617-4/J				ø5/32	VPOD4x10-40E617-4/J	
			ø6	VPOD4x10-40E617-6/J				ø1/4	VPOD4x10-40E617-1/J	
		50	ø3	VPOD4x10-50E617-1/J			50	ø1/8	VPOD4x10-50E617-1/J	
			ø4	VPOD4x10-50E617-4/J				ø5/32	VPOD4x10-50E617-4/J	
			ø6	VPOD4x10-50E617-6/J				ø1/4	VPOD4x10-50E617-1/J	
	4×20	20	ø3	VPOD4x20-20E617-1/J		4×20	20	ø1/8	VPOD4x20-20E617-1/J	
			ø4	VPOD4x20-20E617-4/J				ø5/32	VPOD4x20-20E617-4/J	
			ø6	VPOD4x20-20E617-6/J				ø1/4	VPOD4x20-20E617-1/J	
		30	ø3	VPOD4x20-30E617-1/J			30	ø1/8	VPOD4x20-30E617-1/J	
			ø4	VPOD4x20-30E617-4/J				ø5/32	VPOD4x20-30E617-4/J	
			ø6	VPOD4x20-30E617-6/J				ø1/4	VPOD4x20-30E617-1/J	
		40	ø3	VPOD4x20-40E617-1/J			40	ø1/8	VPOD4x20-40E617-1/J	
			ø4	VPOD4x20-40E617-4/J				ø5/32	VPOD4x20-40E617-4/J	
			ø6	VPOD4x20-40E617-6/J				ø1/4	VPOD4x20-40E617-1/J	
		50	ø3	VPOD4x20-50E617-1/J			50	ø1/8	VPOD4x20-50E617-1/J	
			ø4	VPOD4x20-50E617-4/J				ø5/32	VPOD4x20-50E617-4/J	
			ø6	VPOD4x20-50E617-6/J				ø1/4	VPOD4x20-50E617-1/J	
	4×30	20	ø3	VPOD4x30-20E617-1/J ¹⁾		4×30	20	ø1/8	VPOD4x30-20E617-1/J ¹⁾	
			ø4	VPOD4x30-20E617-4/J ¹⁾				ø5/32	VPOD4x30-20E617-4/J ¹⁾	
			ø6	VPOD4x30-20E617-6/J ¹⁾				ø1/4	VPOD4x30-20E617-1/J ¹⁾	
		30	ø3	VPOD4x30-30E617-1/J ¹⁾			30	ø1/8	VPOD4x30-30E617-1/J ¹⁾	
			ø4	VPOD4x30-30E617-4/J ¹⁾				ø5/32	VPOD4x30-30E617-4/J ¹⁾	
			ø6	VPOD4x30-30E617-6/J ¹⁾				ø1/4	VPOD4x30-30E617-1/J ¹⁾	
		40	ø3	VPOD4x30-40E617-1/J ¹⁾			40	ø1/8	VPOD4x30-40E617-1/J ¹⁾	
			ø4	VPOD4x30-40E617-4/J ¹⁾				ø5/32	VPOD4x30-40E617-4/J ¹⁾	
			ø6	VPOD4x30-40E617-6/J ¹⁾				ø1/4	VPOD4x30-40E617-1/J ¹⁾	
		50	ø3	VPOD4x30-50E617-1/J ¹⁾			50	ø1/8	VPOD4x30-50E617-1/J ¹⁾	
			ø4	VPOD4x30-50E617-4/J ¹⁾				ø5/32	VPOD4x30-50E617-4/J ¹⁾	
			ø6	VPOD4x30-50E617-6/J ¹⁾				ø1/4	VPOD4x30-50E617-1/J ¹⁾	

RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad size (A×B) (mm) A B	Stroke (mm)	Tube O.D. (mm)	Model code	Connection config. code	Pad size (A×B) (mm) A B	Stroke (mm)	Tube O.D. (inch)	Model code	Connection config. code
Spring type, Side port, Push-in fitting, No cover VPOD  Pad size 5×10mm to 5×30mm	5×10	20	ø3	VPOD5x10-20E617-3J	Me	5×10	20	ø1/8	VPOD5x10-20E617-1/J	M6
			ø4	VPOD5x10-20E617-4/J				ø5/32	VPOD5x10-20E617-4/J	
			ø6	VPOD5x10-20E617-6/J				ø1/4	VPOD5x10-20E617-1/J	
		30	ø3	VPOD5x10-30E617-3J			30	ø1/8	VPOD5x10-30E617-1/J	
			ø4	VPOD5x10-30E617-4/J				ø5/32	VPOD5x10-30E617-4/J	
			ø6	VPOD5x10-30E617-6/J				ø1/4	VPOD5x10-30E617-1/J	
		40	ø3	VPOD5x10-40E617-3J			40	ø1/8	VPOD5x10-40E617-1/J	
			ø4	VPOD5x10-40E617-4/J				ø5/32	VPOD5x10-40E617-4/J	
			ø6	VPOD5x10-40E617-6/J				ø1/4	VPOD5x10-40E617-1/J	
		50	ø3	VPOD5x10-50E617-3J			50	ø1/8	VPOD5x10-50E617-1/J	
			ø4	VPOD5x10-50E617-4/J				ø5/32	VPOD5x10-50E617-4/J	
			ø6	VPOD5x10-50E617-6/J				ø1/4	VPOD5x10-50E617-1/J	
	5×20	20	ø3	VPOD5x20-20E617-3J		5×20	20	ø1/8	VPOD5x20-20E617-1/J	
			ø4	VPOD5x20-20E617-4/J				ø5/32	VPOD5x20-20E617-4/J	
			ø6	VPOD5x20-20E617-6/J				ø1/4	VPOD5x20-20E617-1/J	
		30	ø3	VPOD5x20-30E617-3J			30	ø1/8	VPOD5x20-30E617-1/J	
			ø4	VPOD5x20-30E617-4/J				ø5/32	VPOD5x20-30E617-4/J	
			ø6	VPOD5x20-30E617-6/J				ø1/4	VPOD5x20-30E617-1/J	
		40	ø3	VPOD5x20-40E617-3J			40	ø1/8	VPOD5x20-40E617-1/J	
			ø4	VPOD5x20-40E617-4/J				ø5/32	VPOD5x20-40E617-4/J	
			ø6	VPOD5x20-40E617-6/J				ø1/4	VPOD5x20-40E617-1/J	
		50	ø3	VPOD5x20-50E617-3J			50	ø1/8	VPOD5x20-50E617-1/J	
			ø4	VPOD5x20-50E617-4/J				ø5/32	VPOD5x20-50E617-4/J	
			ø6	VPOD5x20-50E617-6/J				ø1/4	VPOD5x20-50E617-1/J	
	5×30	20	ø3	VPOD5x30-20E617-3J		5×30	20	ø1/8	VPOD5x30-20E617-1/J	
			ø4	VPOD5x30-20E617-4/J				ø5/32	VPOD5x30-20E617-4/J	
			ø6	VPOD5x30-20E617-6/J				ø1/4	VPOD5x30-20E617-1/J	
		30	ø3	VPOD5x30-30E617-3J			30	ø1/8	VPOD5x30-30E617-1/J	
			ø4	VPOD5x30-30E617-4/J				ø5/32	VPOD5x30-30E617-4/J	
			ø6	VPOD5x30-30E617-6/J				ø1/4	VPOD5x30-30E617-1/J	
40		ø3	VPOD5x30-40E617-3J	40	ø1/8		VPOD5x30-40E617-1/J			
		ø4	VPOD5x30-40E617-4/J		ø5/32		VPOD5x30-40E617-4/J			
		ø6	VPOD5x30-40E617-6/J		ø1/4		VPOD5x30-40E617-1/J			
50		ø3	VPOD5x30-50E617-3J	50	ø1/8		VPOD5x30-50E617-1/J			
		ø4	VPOD5x30-50E617-4/J		ø5/32		VPOD5x30-50E617-4/J			
		ø6	VPOD5x30-50E617-6/J		ø1/4		VPOD5x30-50E617-1/J			

RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad size (A×B) (mm)	Stroke (mm)	Tube O.D. (mm)	Model code	Connection config. code	Pad size (A×B) (mm)	Stroke (mm)	Tube O.D. (inch)	Model code	Connection config. code
Spring type, Side port, Push-in fitting, No cover										
 Pad size 6×10mm to 8×30mm	6×10	20	ø3	VPOD6x10-20E[7]-J	M6	6×10	20	ø1/8	VPOD6x10-20E[7]-J	M6
			ø4	VPOD6x10-20E[7]-J				ø5/32	VPOD6x10-20E[7]-J	
			ø6	VPOD6x10-20E[7]-J				ø1/4	VPOD6x10-20E[7]-J	
		30	ø3	VPOD6x10-30E[7]-J			30	ø1/8	VPOD6x10-30E[7]-J	
			ø4	VPOD6x10-30E[7]-J				ø5/32	VPOD6x10-30E[7]-J	
			ø6	VPOD6x10-30E[7]-J				ø1/4	VPOD6x10-30E[7]-J	
		40	ø3	VPOD6x10-40E[7]-J			40	ø1/8	VPOD6x10-40E[7]-J	
			ø4	VPOD6x10-40E[7]-J				ø5/32	VPOD6x10-40E[7]-J	
			ø6	VPOD6x10-40E[7]-J				ø1/4	VPOD6x10-40E[7]-J	
		50	ø3	VPOD6x10-50E[7]-J			50	ø1/8	VPOD6x10-50E[7]-J	
			ø4	VPOD6x10-50E[7]-J				ø5/32	VPOD6x10-50E[7]-J	
			ø6	VPOD6x10-50E[7]-J				ø1/4	VPOD6x10-50E[7]-J	
	6×20	20	ø3	VPOD6x20-20E[7]-J		6×20	20	ø1/8	VPOD6x20-20E[7]-J	
			ø4	VPOD6x20-20E[7]-J				ø5/32	VPOD6x20-20E[7]-J	
			ø6	VPOD6x20-20E[7]-J				ø1/4	VPOD6x20-20E[7]-J	
		30	ø3	VPOD6x20-30E[7]-J			30	ø1/8	VPOD6x20-30E[7]-J	
			ø4	VPOD6x20-30E[7]-J				ø5/32	VPOD6x20-30E[7]-J	
			ø6	VPOD6x20-30E[7]-J				ø1/4	VPOD6x20-30E[7]-J	
		40	ø3	VPOD6x20-40E[7]-J			40	ø1/8	VPOD6x20-40E[7]-J	
			ø4	VPOD6x20-40E[7]-J				ø5/32	VPOD6x20-40E[7]-J	
			ø6	VPOD6x20-40E[7]-J				ø1/4	VPOD6x20-40E[7]-J	
		50	ø3	VPOD6x20-50E[7]-J			50	ø1/8	VPOD6x20-50E[7]-J	
			ø4	VPOD6x20-50E[7]-J				ø5/32	VPOD6x20-50E[7]-J	
			ø6	VPOD6x20-50E[7]-J				ø1/4	VPOD6x20-50E[7]-J	
	6×30	20	ø3	VPOD6x30-20E[7]-J		6×30	20	ø1/8	VPOD6x30-20E[7]-J	
			ø4	VPOD6x30-20E[7]-J				ø5/32	VPOD6x30-20E[7]-J	
			ø6	VPOD6x30-20E[7]-J				ø1/4	VPOD6x30-20E[7]-J	
		30	ø3	VPOD6x30-30E[7]-J			30	ø1/8	VPOD6x30-30E[7]-J	
			ø4	VPOD6x30-30E[7]-J				ø5/32	VPOD6x30-30E[7]-J	
			ø6	VPOD6x30-30E[7]-J				ø1/4	VPOD6x30-30E[7]-J	
		40	ø3	VPOD6x30-40E[7]-J			40	ø1/8	VPOD6x30-40E[7]-J	
			ø4	VPOD6x30-40E[7]-J				ø5/32	VPOD6x30-40E[7]-J	
			ø6	VPOD6x30-40E[7]-J				ø1/4	VPOD6x30-40E[7]-J	
		50	ø3	VPOD6x30-50E[7]-J			50	ø1/8	VPOD6x30-50E[7]-J	
			ø4	VPOD6x30-50E[7]-J				ø5/32	VPOD6x30-50E[7]-J	
			ø6	VPOD6x30-50E[7]-J				ø1/4	VPOD6x30-50E[7]-J	
	8×20	20	ø3	VPOD8x20-20E[7]-J		8×20	20	ø1/8	VPOD8x20-20E[7]-J	
			ø4	VPOD8x20-20E[7]-J				ø5/32	VPOD8x20-20E[7]-J	
			ø6	VPOD8x20-20E[7]-J				ø1/4	VPOD8x20-20E[7]-J	
		30	ø3	VPOD8x20-30E[7]-J			30	ø1/8	VPOD8x20-30E[7]-J	
			ø4	VPOD8x20-30E[7]-J				ø5/32	VPOD8x20-30E[7]-J	
			ø6	VPOD8x20-30E[7]-J				ø1/4	VPOD8x20-30E[7]-J	
		40	ø3	VPOD8x20-40E[7]-J			40	ø1/8	VPOD8x20-40E[7]-J	
			ø4	VPOD8x20-40E[7]-J				ø5/32	VPOD8x20-40E[7]-J	
			ø6	VPOD8x20-40E[7]-J				ø1/4	VPOD8x20-40E[7]-J	
		50	ø3	VPOD8x20-50E[7]-J			50	ø1/8	VPOD8x20-50E[7]-J	
			ø4	VPOD8x20-50E[7]-J				ø5/32	VPOD8x20-50E[7]-J	
			ø6	VPOD8x20-50E[7]-J				ø1/4	VPOD8x20-50E[7]-J	
	8×30	20	ø3	VPOD8x30-20E[7]-J		8×30	20	ø1/8	VPOD8x30-20E[7]-J	
			ø4	VPOD8x30-20E[7]-J				ø5/32	VPOD8x30-20E[7]-J	
			ø6	VPOD8x30-20E[7]-J				ø1/4	VPOD8x30-20E[7]-J	
		30	ø3	VPOD8x30-30E[7]-J			30	ø1/8	VPOD8x30-30E[7]-J	
			ø4	VPOD8x30-30E[7]-J				ø5/32	VPOD8x30-30E[7]-J	
			ø6	VPOD8x30-30E[7]-J				ø1/4	VPOD8x30-30E[7]-J	
		40	ø3	VPOD8x30-40E[7]-J			40	ø1/8	VPOD8x30-40E[7]-J	
			ø4	VPOD8x30-40E[7]-J				ø5/32	VPOD8x30-40E[7]-J	
			ø6	VPOD8x30-40E[7]-J				ø1/4	VPOD8x30-40E[7]-J	
		50	ø3	VPOD8x30-50E[7]-J			50	ø1/8	VPOD8x30-50E[7]-J	
			ø4	VPOD8x30-50E[7]-J				ø5/32	VPOD8x30-50E[7]-J	
			ø6	VPOD8x30-50E[7]-J				ø1/4	VPOD8x30-50E[7]-J	

RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad size (A×B) (mm)	Stroke (mm)	Male thread size	Model code	Connec- tion code
Spring type, Side port, Female thread, No cover VPOD 		20	M6×1	VPOD2x4-20E[7]-M6	M6
		30		VPOD2x4-30E[7]-M6	
		40		VPOD2x4-40E[7]-M6	
	2×4	50	VPOD2x4-50E[7]-M6		
			20	VPOD3.5x7-20E[7]-M6	
			30	VPOD3.5x7-30E[7]-M6	
	40		VPOD3.5x7-40E[7]-M6		
	3.5×7	50	VPOD3.5x7-50E[7]-M6		
			20	VPOD4x10-20E[7]-M6	
			30	VPOD4x10-30E[7]-M6	
	40		VPOD4x10-40E[7]-M6		
	4×10	50	VPOD4x10-50E[7]-M6		
			20	VPOD4x20-20E[7]-M6	
			30	VPOD4x20-30E[7]-M6	
	40		VPOD4x20-40E[7]-M6		
	4×20	50	VPOD4x20-50E[7]-M6		
			20	VPOD4x30-20E[7]-M6*	
			30	VPOD4x30-30E[7]-M6*	
	40		VPOD4x30-40E[7]-M6*		
	4×30	50	VPOD4x30-50E[7]-M6*		
			20	VPOD5x10-20E[7]-M6	
			30	VPOD5x10-30E[7]-M6	
	40		VPOD5x10-40E[7]-M6		
	5×10	50	VPOD5x10-50E[7]-M6		
			20	VPOD5x20-20E[7]-M6	
			30	VPOD5x20-30E[7]-M6	
	40		VPOD5x20-40E[7]-M6		
	5×20	50	VPOD5x20-50E[7]-M6		
			20	VPOD5x30-20E[7]-M6	
			30	VPOD5x30-30E[7]-M6	
	40		VPOD5x30-40E[7]-M6		
	5×30	50	VPOD5x30-50E[7]-M6		
			20	VPOD6x10-20E[7]-M6	
			30	VPOD6x10-30E[7]-M6	
	40		VPOD6x10-40E[7]-M6		
	6×10	50	VPOD6x10-50E[7]-M6		
			20	VPOD6x20-20E[7]-M6	
			30	VPOD6x20-30E[7]-M6	
	40		VPOD6x20-40E[7]-M6		
	6×20	50	VPOD6x20-50E[7]-M6		
			20	VPOD6x30-20E[7]-M6	
			30	VPOD6x30-30E[7]-M6	
	40		VPOD6x30-40E[7]-M6		
	6×30	50	VPOD6x30-50E[7]-M6		
			20	VPOD8x20-20E[7]-M6	
			30	VPOD8x20-30E[7]-M6	
	40		VPOD8x20-40E[7]-M6		
	8×20	50	VPOD8x20-50E[7]-M6		
			20	VPOD8x30-20E[7]-M6	
			30	VPOD8x30-30E[7]-M6	
	40		VPOD8x30-40E[7]-M6		
	8×30	50	VPOD8x30-50E[7]-M6		

RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad size (A×B) (mm)	Stroke (mm)	Tube O.D. (mm)	Model code	Connection config. code	Pad size (A×B) (mm)	Stroke (mm)	Tube O.D. (inch)	Model code	Connection config. code				
	A					B					A	B		
Spring type, Side port, Push-in fitting, Low dust emission VPLFD  Pad size 2×4mm to 4×30mm	2×4	5	ø3	VPLFD2x4-5E(7)-3J	2×4	2×4	5	ø1/8	VPLFD2x4-5E(7)-1/8J	2×4				
			ø4	VPLFD2x4-5E(7)-4J				ø5/32	VPLFD2x4-5E(7)-1/16J					
			ø6	VPLFD2x4-5E(7)-6J				ø1/4	VPLFD2x4-5E(7)-1/4J					
		10	ø3	VPLFD2x4-10E(7)-3J			10	ø1/8	VPLFD2x4-10E(7)-1/8J					
			ø4	VPLFD2x4-10E(7)-4J				ø5/32	VPLFD2x4-10E(7)-1/16J					
			ø6	VPLFD2x4-10E(7)-6J				ø1/4	VPLFD2x4-10E(7)-1/4J					
		15	ø3	VPLFD2x4-15E(7)-3J			15	ø1/8	VPLFD2x4-15E(7)-1/8J					
			ø4	VPLFD2x4-15E(7)-4J				ø5/32	VPLFD2x4-15E(7)-1/16J					
			ø6	VPLFD2x4-15E(7)-6J				ø1/4	VPLFD2x4-15E(7)-1/4J					
		20	ø3	VPLFD2x4-20E(7)-3J			20	ø1/8	VPLFD2x4-20E(7)-1/8J					
			ø4	VPLFD2x4-20E(7)-4J				ø5/32	VPLFD2x4-20E(7)-1/16J					
			ø6	VPLFD2x4-20E(7)-6J				ø1/4	VPLFD2x4-20E(7)-1/4J					
	3.5×7	5	ø3	VPLFD3.5x7-5E(7)-3J	3.5×7		3.5×7	5	ø1/8	VPLFD3.5x7-5E(7)-1/8J	3.5×7			
			ø4	VPLFD3.5x7-5E(7)-4J					ø5/32	VPLFD3.5x7-5E(7)-1/16J				
			ø6	VPLFD3.5x7-5E(7)-6J					ø1/4	VPLFD3.5x7-5E(7)-1/4J				
		10	ø3	VPLFD3.5x7-10E(7)-3J				10	ø1/8	VPLFD3.5x7-10E(7)-1/8J				
			ø4	VPLFD3.5x7-10E(7)-4J					ø5/32	VPLFD3.5x7-10E(7)-1/16J				
			ø6	VPLFD3.5x7-10E(7)-6J					ø1/4	VPLFD3.5x7-10E(7)-1/4J				
		15	ø3	VPLFD3.5x7-15E(7)-3J				15	ø1/8	VPLFD3.5x7-15E(7)-1/8J				
			ø4	VPLFD3.5x7-15E(7)-4J					ø5/32	VPLFD3.5x7-15E(7)-1/16J				
			ø6	VPLFD3.5x7-15E(7)-6J					ø1/4	VPLFD3.5x7-15E(7)-1/4J				
		20	ø3	VPLFD3.5x7-20E(7)-3J				20	ø1/8	VPLFD3.5x7-20E(7)-1/8J				
			ø4	VPLFD3.5x7-20E(7)-4J					ø5/32	VPLFD3.5x7-20E(7)-1/16J				
			ø6	VPLFD3.5x7-20E(7)-6J					ø1/4	VPLFD3.5x7-20E(7)-1/4J				
	4×10	5	ø3	VPLFD4x10-5E(7)-3J	4×10			4×10	5	ø1/8	VPLFD4x10-5E(7)-1/8J	4×10		
			ø4	VPLFD4x10-5E(7)-4J						ø5/32	VPLFD4x10-5E(7)-1/16J			
			ø6	VPLFD4x10-5E(7)-6J						ø1/4	VPLFD4x10-5E(7)-1/4J			
		10	ø3	VPLFD4x10-10E(7)-3J					10	ø1/8	VPLFD4x10-10E(7)-1/8J			
			ø4	VPLFD4x10-10E(7)-4J						ø5/32	VPLFD4x10-10E(7)-1/16J			
			ø6	VPLFD4x10-10E(7)-6J						ø1/4	VPLFD4x10-10E(7)-1/4J			
		15	ø3	VPLFD4x10-15E(7)-3J					15	ø1/8	VPLFD4x10-15E(7)-1/8J			
			ø4	VPLFD4x10-15E(7)-4J						ø5/32	VPLFD4x10-15E(7)-1/16J			
			ø6	VPLFD4x10-15E(7)-6J						ø1/4	VPLFD4x10-15E(7)-1/4J			
		20	ø3	VPLFD4x10-20E(7)-3J					20	ø1/8	VPLFD4x10-20E(7)-1/8J			
			ø4	VPLFD4x10-20E(7)-4J						ø5/32	VPLFD4x10-20E(7)-1/16J			
			ø6	VPLFD4x10-20E(7)-6J						ø1/4	VPLFD4x10-20E(7)-1/4J			
	4×20	5	ø3	VPLFD4x20-5E(7)-3J	4×20				4×20	5	ø1/8	VPLFD4x20-5E(7)-1/8J	4×20	
			ø4	VPLFD4x20-5E(7)-4J							ø5/32	VPLFD4x20-5E(7)-1/16J		
			ø6	VPLFD4x20-5E(7)-6J							ø1/4	VPLFD4x20-5E(7)-1/4J		
		10	ø3	VPLFD4x20-10E(7)-3J						10	ø1/8	VPLFD4x20-10E(7)-1/8J		
			ø4	VPLFD4x20-10E(7)-4J							ø5/32	VPLFD4x20-10E(7)-1/16J		
			ø6	VPLFD4x20-10E(7)-6J							ø1/4	VPLFD4x20-10E(7)-1/4J		
		15	ø3	VPLFD4x20-15E(7)-3J						15	ø1/8	VPLFD4x20-15E(7)-1/8J		
			ø4	VPLFD4x20-15E(7)-4J							ø5/32	VPLFD4x20-15E(7)-1/16J		
			ø6	VPLFD4x20-15E(7)-6J							ø1/4	VPLFD4x20-15E(7)-1/4J		
		20	ø3	VPLFD4x20-20E(7)-3J						20	ø1/8	VPLFD4x20-20E(7)-1/8J		
			ø4	VPLFD4x20-20E(7)-4J							ø5/32	VPLFD4x20-20E(7)-1/16J		
			ø6	VPLFD4x20-20E(7)-6J							ø1/4	VPLFD4x20-20E(7)-1/4J		
	4×30	5	ø3	VPLFD4x30-5E(7)-3J ^{*)}	4×30					4×30	5	ø1/8	VPLFD4x30-5E(7)-1/8J ^{*)}	4×30
			ø4	VPLFD4x30-5E(7)-4J ^{*)}								ø5/32	VPLFD4x30-5E(7)-1/16J ^{*)}	
			ø6	VPLFD4x30-5E(7)-6J ^{*)}								ø1/4	VPLFD4x30-5E(7)-1/4J ^{*)}	
		10	ø3	VPLFD4x30-10E(7)-3J ^{*)}							10	ø1/8	VPLFD4x30-10E(7)-1/8J ^{*)}	
			ø4	VPLFD4x30-10E(7)-4J ^{*)}								ø5/32	VPLFD4x30-10E(7)-1/16J ^{*)}	
			ø6	VPLFD4x30-10E(7)-6J ^{*)}								ø1/4	VPLFD4x30-10E(7)-1/4J ^{*)}	
		15	ø3	VPLFD4x30-15E(7)-3J ^{*)}							15	ø1/8	VPLFD4x30-15E(7)-1/8J ^{*)}	
			ø4	VPLFD4x30-15E(7)-4J ^{*)}								ø5/32	VPLFD4x30-15E(7)-1/16J ^{*)}	
			ø6	VPLFD4x30-15E(7)-6J ^{*)}								ø1/4	VPLFD4x30-15E(7)-1/4J ^{*)}	
		20	ø3	VPLFD4x30-20E(7)-3J ^{*)}							20	ø1/8	VPLFD4x30-20E(7)-1/8J ^{*)}	
			ø4	VPLFD4x30-20E(7)-4J ^{*)}								ø5/32	VPLFD4x30-20E(7)-1/16J ^{*)}	
			ø6	VPLFD4x30-20E(7)-6J ^{*)}								ø1/4	VPLFD4x30-20E(7)-1/4J ^{*)}	

RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad size (A×B) (mm) 	Stroke (mm)	Tube O.D. (mm)	Model code	Connection config. code	Pad size (A×B) (mm) 	Stroke (mm)	Tube O.D. (inch)	Model code	Connection config. code
Spring type, Side port, Push-in fitting, Low dust emission VPLFD  Pad size 5×10_{mm} to 5×30_{mm}	5×10	5	ø3	VPLFD5x10-5E(7)-3J	5×10	5×10	5	ø1/8	VPLFD5x10-5E(7)-1/8J	5×10
			ø4	VPLFD5x10-5E(7)-4J				ø5/32	VPLFD5x10-5E(7)-1/16J	
			ø6	VPLFD5x10-5E(7)-6J				ø1/4	VPLFD5x10-5E(7)-1/4J	
		10	ø3	VPLFD5x10-10E(7)-3J			10	ø1/8	VPLFD5x10-10E(7)-1/8J	
			ø4	VPLFD5x10-10E(7)-4J				ø5/32	VPLFD5x10-10E(7)-1/16J	
			ø6	VPLFD5x10-10E(7)-6J				ø1/4	VPLFD5x10-10E(7)-1/4J	
		15	ø3	VPLFD5x10-15E(7)-3J			15	ø1/8	VPLFD5x10-15E(7)-1/8J	
			ø4	VPLFD5x10-15E(7)-4J				ø5/32	VPLFD5x10-15E(7)-1/16J	
			ø6	VPLFD5x10-15E(7)-6J				ø1/4	VPLFD5x10-15E(7)-1/4J	
		20	ø3	VPLFD5x10-20E(7)-3J			20	ø1/8	VPLFD5x10-20E(7)-1/8J	
			ø4	VPLFD5x10-20E(7)-4J				ø5/32	VPLFD5x10-20E(7)-1/16J	
			ø6	VPLFD5x10-20E(7)-6J				ø1/4	VPLFD5x10-20E(7)-1/4J	
	5×20	5	ø3	VPLFD5x20-5E(7)-3J	5×20	5×20	5	ø1/8	VPLFD5x20-5E(7)-1/8J	5×20
			ø4	VPLFD5x20-5E(7)-4J				ø5/32	VPLFD5x20-5E(7)-1/16J	
			ø6	VPLFD5x20-5E(7)-6J				ø1/4	VPLFD5x20-5E(7)-1/4J	
		10	ø3	VPLFD5x20-10E(7)-3J			10	ø1/8	VPLFD5x20-10E(7)-1/8J	
			ø4	VPLFD5x20-10E(7)-4J				ø5/32	VPLFD5x20-10E(7)-1/16J	
			ø6	VPLFD5x20-10E(7)-6J				ø1/4	VPLFD5x20-10E(7)-1/4J	
		15	ø3	VPLFD5x20-15E(7)-3J			15	ø1/8	VPLFD5x20-15E(7)-1/8J	
			ø4	VPLFD5x20-15E(7)-4J				ø5/32	VPLFD5x20-15E(7)-1/16J	
			ø6	VPLFD5x20-15E(7)-6J				ø1/4	VPLFD5x20-15E(7)-1/4J	
		20	ø3	VPLFD5x20-20E(7)-3J			20	ø1/8	VPLFD5x20-20E(7)-1/8J	
			ø4	VPLFD5x20-20E(7)-4J				ø5/32	VPLFD5x20-20E(7)-1/16J	
			ø6	VPLFD5x20-20E(7)-6J				ø1/4	VPLFD5x20-20E(7)-1/4J	
	5×30	5	ø3	VPLFD5x30-5E(7)-3J	5×30	5×30	5	ø1/8	VPLFD5x30-5E(7)-1/8J	5×30
			ø4	VPLFD5x30-5E(7)-4J				ø5/32	VPLFD5x30-5E(7)-1/16J	
			ø6	VPLFD5x30-5E(7)-6J				ø1/4	VPLFD5x30-5E(7)-1/4J	
		10	ø3	VPLFD5x30-10E(7)-3J			10	ø1/8	VPLFD5x30-10E(7)-1/8J	
ø4			VPLFD5x30-10E(7)-4J	ø5/32				VPLFD5x30-10E(7)-1/16J		
ø6			VPLFD5x30-10E(7)-6J	ø1/4				VPLFD5x30-10E(7)-1/4J		
15		ø3	VPLFD5x30-15E(7)-3J	15			ø1/8	VPLFD5x30-15E(7)-1/8J		
		ø4	VPLFD5x30-15E(7)-4J				ø5/32	VPLFD5x30-15E(7)-1/16J		
	ø6	VPLFD5x30-15E(7)-6J	ø1/4		VPLFD5x30-15E(7)-1/4J					
20	ø3	VPLFD5x30-20E(7)-3J	20	ø1/8	VPLFD5x30-20E(7)-1/8J					
	ø4	VPLFD5x30-20E(7)-4J		ø5/32	VPLFD5x30-20E(7)-1/16J					
ø6	VPLFD5x30-20E(7)-6J	ø1/4	VPLFD5x30-20E(7)-1/4J							

RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad size (A×B) (mm)	Stroke (mm)	Tube O.D. (mm)	Model code	Connection config. code	Pad size (A×B) (mm)	Stroke (mm)	Tube O.D. (inch)	Model code	Connection config. code
Spring type Side port, Push-in fitting, Low dust emission VPLFD  Pad size 6×10mm to 8×30mm	6×10	5	ø3	VPLFD6x10-5E617-J	M6	6×10	5	ø1/8	VPLFD6x10-5E617-1/8	M6
			ø4	VPLFD6x10-5E617-J				ø5/32	VPLFD6x10-5E617-5/32	
			ø6	VPLFD6x10-5E617-6J				ø1/4	VPLFD6x10-5E617-1/4	
		10	ø3	VPLFD6x10-10E617-J			10	ø1/8	VPLFD6x10-10E617-1/8	
			ø4	VPLFD6x10-10E617-J				ø5/32	VPLFD6x10-10E617-5/32	
			ø6	VPLFD6x10-10E617-6J				ø1/4	VPLFD6x10-10E617-1/4	
		15	ø3	VPLFD6x10-15E617-J			15	ø1/8	VPLFD6x10-15E617-1/8	
			ø4	VPLFD6x10-15E617-J				ø5/32	VPLFD6x10-15E617-5/32	
			ø6	VPLFD6x10-15E617-6J				ø1/4	VPLFD6x10-15E617-1/4	
		20	ø3	VPLFD6x10-20E617-J			20	ø1/8	VPLFD6x10-20E617-1/8	
			ø4	VPLFD6x10-20E617-J				ø5/32	VPLFD6x10-20E617-5/32	
			ø6	VPLFD6x10-20E617-6J				ø1/4	VPLFD6x10-20E617-1/4	
	6×20	5	ø3	VPLFD6x20-5E617-J		6×20	5	ø1/8	VPLFD6x20-5E617-1/8	
			ø4	VPLFD6x20-5E617-J				ø5/32	VPLFD6x20-5E617-5/32	
			ø6	VPLFD6x20-5E617-6J				ø1/4	VPLFD6x20-5E617-1/4	
		10	ø3	VPLFD6x20-10E617-J			10	ø1/8	VPLFD6x20-10E617-1/8	
			ø4	VPLFD6x20-10E617-J				ø5/32	VPLFD6x20-10E617-5/32	
			ø6	VPLFD6x20-10E617-6J				ø1/4	VPLFD6x20-10E617-1/4	
		15	ø3	VPLFD6x20-15E617-J			15	ø1/8	VPLFD6x20-15E617-1/8	
			ø4	VPLFD6x20-15E617-J				ø5/32	VPLFD6x20-15E617-5/32	
			ø6	VPLFD6x20-15E617-6J				ø1/4	VPLFD6x20-15E617-1/4	
		20	ø3	VPLFD6x20-20E617-J			20	ø1/8	VPLFD6x20-20E617-1/8	
			ø4	VPLFD6x20-20E617-J				ø5/32	VPLFD6x20-20E617-5/32	
			ø6	VPLFD6x20-20E617-6J				ø1/4	VPLFD6x20-20E617-1/4	
	6×30	5	ø3	VPLFD6x30-5E617-J		6×30	5	ø1/8	VPLFD6x30-5E617-1/8	
			ø4	VPLFD6x30-5E617-J				ø5/32	VPLFD6x30-5E617-5/32	
			ø6	VPLFD6x30-5E617-6J				ø1/4	VPLFD6x30-5E617-1/4	
		10	ø3	VPLFD6x30-10E617-J			10	ø1/8	VPLFD6x30-10E617-1/8	
			ø4	VPLFD6x30-10E617-J				ø5/32	VPLFD6x30-10E617-5/32	
			ø6	VPLFD6x30-10E617-6J				ø1/4	VPLFD6x30-10E617-1/4	
		15	ø3	VPLFD6x30-15E617-J			15	ø1/8	VPLFD6x30-15E617-1/8	
			ø4	VPLFD6x30-15E617-J				ø5/32	VPLFD6x30-15E617-5/32	
			ø6	VPLFD6x30-15E617-6J				ø1/4	VPLFD6x30-15E617-1/4	
		20	ø3	VPLFD6x30-20E617-J			20	ø1/8	VPLFD6x30-20E617-1/8	
			ø4	VPLFD6x30-20E617-J				ø5/32	VPLFD6x30-20E617-5/32	
			ø6	VPLFD6x30-20E617-6J				ø1/4	VPLFD6x30-20E617-1/4	
	8×20	5	ø3	VPLFD8x20-5E617-J		8×20	5	ø1/8	VPLFD8x20-5E617-1/8	
			ø4	VPLFD8x20-5E617-J				ø5/32	VPLFD8x20-5E617-5/32	
			ø6	VPLFD8x20-5E617-6J				ø1/4	VPLFD8x20-5E617-1/4	
		10	ø3	VPLFD8x20-10E617-J			10	ø1/8	VPLFD8x20-10E617-1/8	
			ø4	VPLFD8x20-10E617-J				ø5/32	VPLFD8x20-10E617-5/32	
			ø6	VPLFD8x20-10E617-6J				ø1/4	VPLFD8x20-10E617-1/4	
		15	ø3	VPLFD8x20-15E617-J			15	ø1/8	VPLFD8x20-15E617-1/8	
			ø4	VPLFD8x20-15E617-J				ø5/32	VPLFD8x20-15E617-5/32	
			ø6	VPLFD8x20-15E617-6J				ø1/4	VPLFD8x20-15E617-1/4	
		20	ø3	VPLFD8x20-20E617-J			20	ø1/8	VPLFD8x20-20E617-1/8	
			ø4	VPLFD8x20-20E617-J				ø5/32	VPLFD8x20-20E617-5/32	
			ø6	VPLFD8x20-20E617-6J				ø1/4	VPLFD8x20-20E617-1/4	
	8×30	5	ø3	VPLFD8x30-5E617-J		8×30	5	ø1/8	VPLFD8x30-5E617-1/8	
			ø4	VPLFD8x30-5E617-J				ø5/32	VPLFD8x30-5E617-5/32	
			ø6	VPLFD8x30-5E617-6J				ø1/4	VPLFD8x30-5E617-1/4	
		10	ø3	VPLFD8x30-10E617-J			10	ø1/8	VPLFD8x30-10E617-1/8	
			ø4	VPLFD8x30-10E617-J				ø5/32	VPLFD8x30-10E617-5/32	
			ø6	VPLFD8x30-10E617-6J				ø1/4	VPLFD8x30-10E617-1/4	
		15	ø3	VPLFD8x30-15E617-J			15	ø1/8	VPLFD8x30-15E617-1/8	
			ø4	VPLFD8x30-15E617-J				ø5/32	VPLFD8x30-15E617-5/32	
			ø6	VPLFD8x30-15E617-6J				ø1/4	VPLFD8x30-15E617-1/4	
		20	ø3	VPLFD8x30-20E617-J			20	ø1/8	VPLFD8x30-20E617-1/8	
			ø4	VPLFD8x30-20E617-J				ø5/32	VPLFD8x30-20E617-5/32	
			ø6	VPLFD8x30-20E617-6J				ø1/4	VPLFD8x30-20E617-1/4	

RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad size (A×B) (mm)	Stroke (mm)	Male thread size	Model code (mm size)	Connection config. code
Spring type, Side port, Female thread, Low dust emission VPLFD 	2×4	5	M6×1	VPLFD2x4-5E617-M6	M6
		10	M6×1	VPLFD2x4-10E617-M6	
		15	M6×1	VPLFD2x4-15E617-M6	
		20	M6×1	VPLFD2x4-20E617-M6	
		5	M6×1	VPLFD3.5x7-5E617-M6	
		10	M6×1	VPLFD3.5x7-10E617-M6	
	3.5×7	15	M6×1	VPLFD3.5x7-15E617-M6	
		20	M6×1	VPLFD3.5x7-20E617-M6	
		5	M6×1	VPLFD4x10-5E617-M6	
		10	M6×1	VPLFD4x10-10E617-M6	
		15	M6×1	VPLFD4x10-15E617-M6	
		20	M6×1	VPLFD4x10-20E617-M6	
	4×10	5	M6×1	VPLFD4x20-5E617-M6	
		10	M6×1	VPLFD4x20-10E617-M6	
		15	M6×1	VPLFD4x20-15E617-M6	
		20	M6×1	VPLFD4x20-20E617-M6	
	4×20	5	M6×1	VPLFD4x30-5E617-M6 ^{*)}	
		10	M6×1	VPLFD4x30-10E617-M6 ^{*)}	
		15	M6×1	VPLFD4x30-15E617-M6 ^{*)}	
		20	M6×1	VPLFD4x30-20E617-M6 ^{*)}	
	4×30	5	M6×1	VPLFD5x10-5E617-M6	
		10	M6×1	VPLFD5x10-10E617-M6	
		15	M6×1	VPLFD5x10-15E617-M6	
		20	M6×1	VPLFD5x10-20E617-M6	
	5×10	5	M6×1	VPLFD5x20-5E617-M6	
		10	M6×1	VPLFD5x20-10E617-M6	
		15	M6×1	VPLFD5x20-15E617-M6	
		20	M6×1	VPLFD5x20-20E617-M6	
	5×20	5	M6×1	VPLFD5x30-5E617-M6	
		10	M6×1	VPLFD5x30-10E617-M6	
		15	M6×1	VPLFD5x30-15E617-M6	
		20	M6×1	VPLFD5x30-20E617-M6	
	5×30	5	M6×1	VPLFD6x10-5E617-M6	
		10	M6×1	VPLFD6x10-10E617-M6	
		15	M6×1	VPLFD6x10-15E617-M6	
		20	M6×1	VPLFD6x10-20E617-M6	
	6×10	5	M6×1	VPLFD6x20-5E617-M6	
		10	M6×1	VPLFD6x20-10E617-M6	
		15	M6×1	VPLFD6x20-15E617-M6	
		20	M6×1	VPLFD6x20-20E617-M6	
	6×20	5	M6×1	VPLFD6x30-5E617-M6	
		10	M6×1	VPLFD6x30-10E617-M6	
		15	M6×1	VPLFD6x30-15E617-M6	
		20	M6×1	VPLFD6x30-20E617-M6	
	6×30	5	M6×1	VPLFD6x40-5E617-M6	
		10	M6×1	VPLFD6x40-10E617-M6	
		15	M6×1	VPLFD6x40-15E617-M6	
		20	M6×1	VPLFD6x40-20E617-M6	
	8×20	5	M6×1	VPLFD8x30-5E617-M6	
		10	M6×1	VPLFD8x30-10E617-M6	
		15	M6×1	VPLFD8x30-15E617-M6	
		20	M6×1	VPLFD8x30-20E617-M6	
	8×30	5	M6×1	VPLFD8x40-5E617-M6	
		10	M6×1	VPLFD8x40-10E617-M6	
		15	M6×1	VPLFD8x40-15E617-M6	
		20	M6×1	VPLFD8x40-20E617-M6	



Notes

- *1. Barb fitting type holders are also available. Contact us for the details.
- *2. Urethane (U) and Fluoro (F) are not available.



Holder type Fixed type, Direct mount, Standard	Metric male threads, metric female threads, taper pipe threads, parallel pipe threads and NPT threads are available. See Pad holder only (page 399) for variations. * Pads with the same configuration code as the holder can be connected. (See Pad rubber only (page 383)).				
 VPE	Metric male thread: M8, M10, M12, M14 Metric female thread: M5, M8 Taper pipe thread: R1/8, R1/4, R3/8, R1/2 Parallel pipe thread: G1/8, G1/4, G3/8, G1/2 NPT thread: NPT1/8, NPT1/4, NPT3/8, NPT1/2				
Holder type	Pad size (A×B) (mm) 	Female thread size	Model code	13-S3 spec.	Connection code
Spring type, Direct mount  VPF	2×4 3.5×7 4×10 4×20 4×30 5×10 5×20 5×30 6×10 6×20 6×30 8×20 8×30	M14×1 M14×1 M14×1 M14×1 M14×1 M14×1 M14×1 M14×1 M14×1 M14×1 M14×1 M14×1 M14×1	VPF2x4E[6]71913 VPF3.5x7E[6]71913 VPF4x10E[6]71913 VPF4x20E[6]71913 VPF4x30E[6]71913 VPF5x10E[6]71913 VPF5x20E[6]71913 VPF5x30E[6]71913 VPF6x10E[6]71913 VPF6x20E[6]71913 VPF6x30E[6]71913 VPF8x20E[6]71913 VPF8x30E[6]71913	○ ○ ○ ○ ○ ○ ○ ○ ○ ○ ○ ○	MG
Stroke 5.8mm					

Options

- ⑦: Surface treatment (DLC. coating, Reformed surface, and Fluoro-coating)
- ⑨: -DC ⇒ Holder with dust catcher
- ⑩: -S3 ⇒ -S3 spec. (○ in the lists: Available)

*1. For "-S3 spec.", the release ring color is dark blue, and the gasket material is FKM+SUS316.
 *2. For inch size fitting, the release ring color is white even for "-S3 spec."




Holder type	Pad size (A×B) (mm) A B	Tube O.D. (mm)	Model code	13-S3 -S3 spec.	Connection config. code	Pad size (A×B) (mm) A B	Tube O.D. (inch)	Model code	13-S3 -S3 spec.	Connection config. code
Screwed type, Top port, Push-in fitting, For oval pad	2×4	ø3	VPAE2x4E617-3J	—	—	2×4	ø1/8	VPAE2x4E617-1/8J	—	—
		ø4	VPAE2x4E617-4J13	○	—		ø5/32	VPAE2x4E617-4/32J13	○	—
		ø6	VPAE2x4E617-6J13	○	—		ø1/4	VPAE2x4E617-1/4J	—	—
	3.5×7	ø3	VPAE3.5x7E617-3J	—	—		ø1/8	VPAE3.5x7E617-1/8J	—	—
		ø4	VPAE3.5x7E617-4J13	○	E10		ø5/32	VPAE3.5x7E617-4/32J13	○	E10
		ø6	VPAE3.5x7E617-6J13	○	—		ø1/4	VPAE3.5x7E617-1/4J	—	—
	4×10	ø3	VPAE4x10E617-3J	—	—		ø1/8	VPAE4x10E617-1/8J	—	—
		ø4	VPAE4x10E617-4J13	○	—		ø5/32	VPAE4x10E617-4/32J13	○	—
		ø6	VPAE4x10E617-6J13	○	—		ø1/4	VPAE4x10E617-1/4J	—	—
	4×20	ø3	VPAE4x20E617-3J	—	—		ø1/8	VPAE4x20E617-1/8J	—	—
		ø4	VPAE4x20E617-4J13	○	—		ø5/32	VPAE4x20E617-4/32J13	○	—
		ø6	VPAE4x20E617-6J13	○	E20		ø1/4	VPAE4x20E617-1/4J	—	E20
	4×30	ø3	VPAE4x30E617-3J ^{1,2}	—	—		ø1/8	VPAE4x30E617-1/8J ^{1,2}	—	—
		ø4	VPAE4x30E617-4J13 ^{1,2}	○	—		ø5/32	VPAE4x30E617-4/32J13 ^{1,2}	○	—
		ø6	VPAE4x30E617-6J13 ^{1,2}	○	—		ø1/4	VPAE4x30E617-1/4J ^{1,2}	—	—
	5×10	ø3	VPAE5x10E617-3J	—	—		ø1/8	VPAE5x10E617-1/8J	—	—
		ø4	VPAE5x10E617-4J13	○	E10		ø5/32	VPAE5x10E617-4/32J13	○	E10
		ø6	VPAE5x10E617-6J13	○	—		ø1/4	VPAE5x10E617-1/4J	—	—
	5×20	ø3	VPAE5x20E617-3J	—	—		ø1/8	VPAE5x20E617-1/8J	—	—
		ø4	VPAE5x20E617-4J13	○	—		ø5/32	VPAE5x20E617-4/32J13	○	—
		ø6	VPAE5x20E617-6J13	○	E20		ø1/4	VPAE5x20E617-1/4J	—	E20
	5×30	ø3	VPAE5x30E617-3J	—	—		ø1/8	VPAE5x30E617-1/8J	—	—
		ø4	VPAE5x30E617-4J13	○	—		ø5/32	VPAE5x30E617-4/32J13	○	—
		ø6	VPAE5x30E617-6J13	○	—		ø1/4	VPAE5x30E617-1/4J	—	—
	6×10	ø3	VPAE6x10E617-3J	—	—		ø1/8	VPAE6x10E617-1/8J	—	—
		ø4	VPAE6x10E617-4J13	○	E10		ø5/32	VPAE6x10E617-4/32J13	○	E10
		ø6	VPAE6x10E617-6J13	○	—		ø1/4	VPAE6x10E617-1/4J	—	—
	6×20	ø3	VPAE6x20E617-3J	—	—		ø1/8	VPAE6x20E617-1/8J	—	—
		ø4	VPAE6x20E617-4J13	○	—		ø5/32	VPAE6x20E617-4/32J13	○	—
		ø6	VPAE6x20E617-6J13	○	—		ø1/4	VPAE6x20E617-1/4J	—	—
	6×30	ø3	VPAE6x30E617-3J	—	—		ø1/8	VPAE6x30E617-1/8J	—	—
		ø4	VPAE6x30E617-4J13	○	—		ø5/32	VPAE6x30E617-4/32J13	○	—
		ø6	VPAE6x30E617-6J13	○	E20		ø1/4	VPAE6x30E617-1/4J	—	E20
	8×20	ø3	VPAE8x20E617-3J	—	—		ø1/8	VPAE8x20E617-1/8J	—	—
		ø4	VPAE8x20E617-4J13	○	—		ø5/32	VPAE8x20E617-4/32J13	○	—
		ø6	VPAE8x20E617-6J13	○	—		ø1/4	VPAE8x20E617-1/4J	—	—
	8×30	ø3	VPAE8x30E617-3J	—	—		ø1/8	VPAE8x30E617-1/8J	—	—
		ø4	VPAE8x30E617-4J13	○	—		ø5/32	VPAE8x30E617-4/32J13	○	—

Options

⑦: Surface treatment (DLC coating, Reformed surface, and Fluoro-coating)
 ⑧: *S3 → *S3 spec. (○ in the lists: Available)

*1. For *S3 spec., the release ring color is dark blue, and the gasket material is FKM+SUS316.

*2. For inch size push-in fitting, the release ring color is white even for *S3 spec.*



Holder type	Pad size (A×B) (mm)	Tube O.D. (mm)	Model code	13 -S3 spec.	Connection config. code	Pad size (A×B) (mm)	Tube O.D. (mm)	Model code	13 -S3 spec.	Connection config. code
Screw type, Side port, Push-in fitting, For oval pad VPBE	2×4	ø3	VPBE2x4E[6]7-3J	—	E10	2×4	ø1/8	VPBE2x4E[6]7-1/4J	—	E10
		ø4	VPBE2x4E[6]7-4J13	○			ø5/32	VPBE2x4E[6]7-5/32J13	○	
		ø6	VPBE2x4E[6]7-6J13	○			ø1/4	VPBE2x4E[6]7-1/4J	—	
	3.5×7	ø3	VPBE3.5x7E[6]7-3J	—	E10	3.5×7	ø1/8	VPBE3.5x7E[6]7-1/4J	—	E10
		ø4	VPBE3.5x7E[6]7-4J13	○			ø5/32	VPBE3.5x7E[6]7-5/32J13	○	
		ø6	VPBE3.5x7E[6]7-6J13	○			ø1/4	VPBE3.5x7E[6]7-1/4J	—	
	4×10	ø3	VPBE4x10E[6]7-3J	—	E10	4×10	ø1/8	VPBE4x10E[6]7-1/4J	—	E10
		ø4	VPBE4x10E[6]7-4J13	○			ø5/32	VPBE4x10E[6]7-5/32J13	○	
		ø6	VPBE4x10E[6]7-6J13	○			ø1/4	VPBE4x10E[6]7-1/4J	—	
	4×20	ø3	VPBE4x20E[6]7-3J	—	E20	4×20	ø1/8	VPBE4x20E[6]7-1/4J	—	E20
		ø4	VPBE4x20E[6]7-4J13	○			ø5/32	VPBE4x20E[6]7-5/32J13	○	
		ø6	VPBE4x20E[6]7-6J13	○			ø1/4	VPBE4x20E[6]7-1/4J	—	
	4×30	ø3	VPBE4x30E[6]7-3J	—	E20	4×30	ø1/8	VPBE4x30E[6]7-1/4J	—	E20
		ø4	VPBE4x30E[6]7-4J13	○			ø5/32	VPBE4x30E[6]7-5/32J13	○	
		ø6	VPBE4x30E[6]7-6J13	○			ø1/4	VPBE4x30E[6]7-1/4J	—	
	5×10	ø3	VPBE5x10E[6]7-3J	—	E10	5×10	ø1/8	VPBE5x10E[6]7-1/4J	—	E10
		ø4	VPBE5x10E[6]7-4J13	○			ø5/32	VPBE5x10E[6]7-5/32J13	○	
		ø6	VPBE5x10E[6]7-6J13	○			ø1/4	VPBE5x10E[6]7-1/4J	—	
	5×20	ø3	VPBE5x20E[6]7-3J	—	E20	5×20	ø1/8	VPBE5x20E[6]7-1/4J	—	E20
		ø4	VPBE5x20E[6]7-4J13	○			ø5/32	VPBE5x20E[6]7-5/32J13	○	
		ø6	VPBE5x20E[6]7-6J13	○			ø1/4	VPBE5x20E[6]7-1/4J	—	
	5×30	ø3	VPBE5x30E[6]7-3J	—	E20	5×30	ø1/8	VPBE5x30E[6]7-1/4J	—	E20
		ø4	VPBE5x30E[6]7-4J13	○			ø5/32	VPBE5x30E[6]7-5/32J13	○	
		ø6	VPBE5x30E[6]7-6J13	○			ø1/4	VPBE5x30E[6]7-1/4J	—	
	6×10	ø3	VPBE6x10E[6]7-3J	—	E10	6×10	ø1/8	VPBE6x10E[6]7-1/4J	—	E10
		ø4	VPBE6x10E[6]7-4J13	○			ø5/32	VPBE6x10E[6]7-5/32J13	○	
		ø6	VPBE6x10E[6]7-6J13	○			ø1/4	VPBE6x10E[6]7-1/4J	—	
	6×20	ø3	VPBE6x20E[6]7-3J	—	E20	6×20	ø1/8	VPBE6x20E[6]7-1/4J	—	E20
		ø4	VPBE6x20E[6]7-4J13	○			ø5/32	VPBE6x20E[6]7-5/32J13	○	
		ø6	VPBE6x20E[6]7-6J13	○			ø1/4	VPBE6x20E[6]7-1/4J	—	
	6×30	ø3	VPBE6x30E[6]7-3J	—	E20	6×30	ø1/8	VPBE6x30E[6]7-1/4J	—	E20
		ø4	VPBE6x30E[6]7-4J13	○			ø5/32	VPBE6x30E[6]7-5/32J13	○	
		ø6	VPBE6x30E[6]7-6J13	○			ø1/4	VPBE6x30E[6]7-1/4J	—	
	8×20	ø3	VPBE8x20E[6]7-3J	—	E20	8×20	ø1/8	VPBE8x20E[6]7-1/4J	—	E20
		ø4	VPBE8x20E[6]7-4J13	○			ø5/32	VPBE8x20E[6]7-5/32J13	○	
		ø6	VPBE8x20E[6]7-6J13	○			ø1/4	VPBE8x20E[6]7-1/4J	—	
	8×30	ø3	VPBE8x30E[6]7-3J	—	E20	8×30	ø1/8	VPBE8x30E[6]7-1/4J	—	E20
		ø4	VPBE8x30E[6]7-4J13	○			ø5/32	VPBE8x30E[6]7-5/32J13	○	
		ø6	VPBE8x30E[6]7-6J13	○			ø1/4	VPBE8x30E[6]7-1/4J	—	

Holder type	Pad size (A×B) (mm)	Male thread size	Model code	13 -S3 spec.	Connection config. code
Screw type, Side port, Female thread, For oval pad VPBE	2×4	M5×0.8	VPBE2x4E[6]7-M513	○	E10
	3.5×7	M5×0.8	VPBE3.5x7E[6]7-M513	○	
	4×10	M5×0.8	VPBE4x10E[6]7-M513	○	
	4×20	M5×0.8	VPBE4x20E[6]7-M513	○	
	4×30	M5×0.8	VPBE4x30E[6]7-M513	○	
	5×10	M5×0.8	VPBE5x10E[6]7-M513	○	
	5×20	M5×0.8	VPBE5x20E[6]7-M513	○	
	5×30	M5×0.8	VPBE5x30E[6]7-M513	○	
	6×10	M5×0.8	VPBE6x10E[6]7-M513	○	
	6×20	M5×0.8	VPBE6x20E[6]7-M513	○	
	6×30	M5×0.8	VPBE6x30E[6]7-M513	○	
	8×20	M5×0.8	VPBE8x20E[6]7-M513	○	
	8×30	M5×0.8	VPBE8x30E[6]7-M513	○	



Notes

- *1. Holders are also available in Push-in fitting type for tube O.D. of 1.8 mm and 2 mm, and barb fitting type. Contact us for the details.
- *2. Urethane (U) and Fluoro (F) are not available.



CAD data is available

at PISCO website.



Packaging specifications

1 pc./bag



Options

- 17: Surface treatment (DLC. coating, Reformed surface, and Fluoro-coating)
- 13: -S3 → -S3 spec. (○ in the lists: Available)

*1. For "-S3 spec.", the release ring color is dark blue, and the gasket material is FKM+SUS316.

*2. For inch size push-in fitting, the release ring color is white even for "-S3 spec."

Optional items
⇒ P.715



Optional items (○: Available)

17 Pad surface treatment (Suction mark-free)

Pad size (mm)	Surface treatment code			Connection config. code
	-DL DLC coating	-ER Reformed surface	-FG Fluoro-coating	
2×4	○	○	○	E10
3.5×7	○	○	○	
4×10	○	○	○	
4×20	○	○	○	
4×30	○	○	○	E20
5×10	○	○	○	
5×20	○	○	○	
5×30	○	○	○	
6×10	○	○	○	E10
6×20	○	○	○	
6×30	○	○	○	
8×20	○	○	○	
8×30	○	○	○	E20
Material	S, F, SE	N, NE	S, SE	

Characteristics of surface treatment ▶ P.370

9 Dust Catcher: -DC

Optional	Connection config. code	-S3 spec.
Dust Catcher (-DC)	M6	○
Holder type		
VPC	VPD	VPF

Characteristics of Dust Catcher ▶ P.371

12 Filter: -F15, -F30

Optional	Filter area	Connection config. code	Model code
Pad Direct Mounting Filter (-F15)(-F30)	1.7cm ² (-F15)	M6	VFF15-M6
	7cm ² (-F30)	M6	VFF30-M6

10 Fall Prevention Valve: -ECV

Optional	Connection config. code	Model code
Fall Prevention Valve (-ECV)	M6	ECVM6-FM6

Characteristics of Fall Prevention Valve ▶ P.722

Characteristics of Filter ▶ P.726

11 Swivel Joint: -FH, -FHH, -CFH

Optional	Swivel angle	Connection config. code	Model code
Ball Swivel Joint (-FH)	30° (-FH)	M6	FH20
(-FHH)	15° (-FHH)	M6	FH20-15

Characteristics of Ball Swivel Joint ▶ P.724

Optional	Connection config. code	-S3 spec.	Model code (*)
Flexible Swing Joint (-CFH)	M6	○	CFHM6-FM6

Characteristics of Flexible Swing Joint ▶ P.725

See the page 680 for the model designation including optional items.

Replacement parts (○: -S3 spec. is available)

Adapter for oval pad Model code	13 -S3 spec.	Applicable pad size. (mm)	Connection config. code
FSPH10-M613	○	2×4, 3.5×7, □×10	M6
FSPH20-M613	○	□×20, □×30	
Gasket for adapter (*) Model code	Applicable adapter		Connection config. code
GAS-M6 (Fall prevention)	FSPH10-M6, FSPH20-M6		M6
	-S3 spec.		
GAS-M6-SUS	FSPH10-M6-S3, FSPH20-M6-S3		M6



Gasket Model code	Applicable pad size. (mm)	Connection config. code
VPFG10	2×4 to 8×30	M6


*Gasket for adapter is equipped with an Adapter. When the gasket alone is necessary, refer to "Gasket for adapter Model code" on the left.

Rearrangement parts (○: -S3 spec. is available)

Adapter for oval pad Model code	13 -S3 spec.	Applicable pad size. (mm)
FSPH10-M513	○	2×4, 3.5×7, □×10
FSPH20-M513	○	□×20, □×30

*Gasket for adapter is equipped with an Adapter.

1. PISCO's Vacuum pad series consists of the combination of vacuum pads and holders.

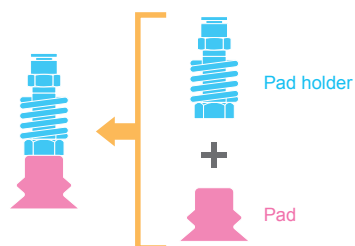


2. Vacuum pad and pad holder have a specific connection type depending on the size and shape.

Pad connection type	Insert type (Direct connection)		Mount type (Direct connection)		Screw type (Connection with screw)	
Connection configuration code	H3		T4 T8 T15 T40 (Exclusive to soft type & soft bellows type vacuum pads) PB8 PB15 (Exclusive to Vacuum pad for packaging bag) E10 E20 (Exclusive to Oval type vacuum pad)		M4 M6 M10 M20 G1 G2 G3 G4	

*As shown in above drawings, Vacuum pad and pad holder are connected with a screw or a rim.

3. Any Vacuum pad and pad holder can be connected, as long as their connection configuration codes are same.

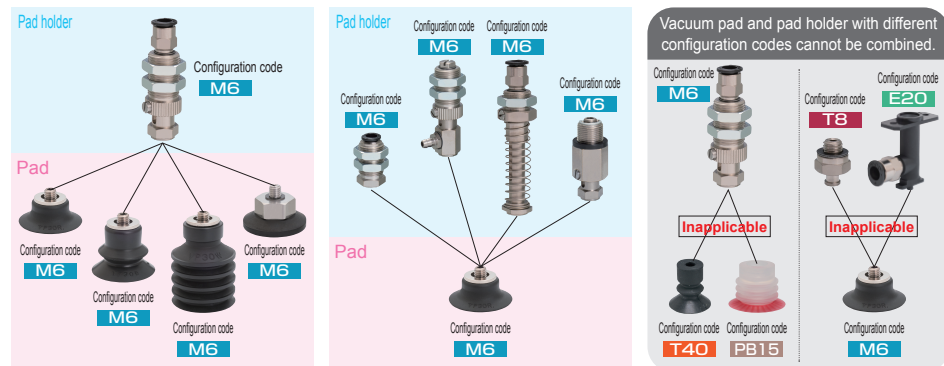

If you have purchased a pad and holder set but want to install a different pad or replace the holder with a different one...
→ Please check the connection configuration code of your pad or pad holder and select the one that matches the configuration code.

4. Please refer to the below chart for the "Connection Configuration Code". *Configuration codes are also listed on the page of model code list for each product.

Connection configuration code list (Holder)

Common holder

	Fixed type		Mini	Slim	Spring type		No cover	Low dust emission
	Mini	Standard			Standard			
Code	VPMA	VPA	VMC	VPSC	VPC	VPOC	VPLFC	
Type								
Configuration code	T4 T8 M4 M6	H3 T8 M4 M6 M10 M20 G1 G2 G3 G4	T4 T8 M4 M6	H3 T8	H3 T8 M4 M6 M10 M20 G1 G2 G3 G4	T8 M4 M6	T4 T8 M4 M6	
Code	VPMB	VPB	VPMD		VPD	VPOD	VPLFD	
Type								
Configuration code	T4 T8 M4 M6	H3 T8 M4 M6 M10 M20 G1 G2 G3 G4	T4 T8 M4 M6		H3 T8 M4 M6 M10 M20 G1 G2 G3 G4	T8 M4 M6	T4 T8 M4 M6	
Code	VPME	VPE			VPF			
Type								
Configuration code	T4 T8 M4 M6	H3 T8 M4 M6 M10 M20 T15 T40			H3 T8 M4 M6			

Common holder (Lightweight/Low profile)

	Top port		Side port	Dual side port
	Code	VPHC		VPHD
Type				
Configuration code	T15 T40 M4 M6	T15 T40 M4 M6		
Code		VPHE		VPHD
Type				
Configuration code		T15 T40 M4 M6		

Special holder *Pads of other shapes cannot be installed.

	Top port		Side port
	Code	VPA	VPB
Type			
Configuration code	E10 E20	E10 E20	
Code	VPA	VPE	
Type			
Configuration code	PB8 PB15	PB8 PB15	

Connection configuration code list (Pad) (○: Available)

Pad type or application	Standard														Pad type or application
	Small	General	Deep	Bellows	Multi-bellows	Metal detectable	Skidproof	Pat Large suction flow type	Mark-free	Soft	Soft bellows	Sponge	Ultrathin	For packaging bag	
Code	R	R	A	B	W	BE, BD	K	F, FH	Q	L	LB	S	P	PB	E
0.7	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
1	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
1.5	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
2	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
3	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
4	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
6	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
8	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
10	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
15	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
20	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
25	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
30	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
35	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
40	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
50	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
60	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
70	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
80	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
100	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
150	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
200	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

Some combinations are possible by using a conversion screw adapter.

H3, T4 and T8 can be converted to M4 or M6. M4 to M6 conversion is also available. For details, please see "Rearrangement parts" of each pad type.

Model Designation (Example)



(1) Vacuum Pad

(2) Pad size (3) Pad type (6) Connection configuration code *Required for Pad & screw set only. (○: Available)

Pad type or application	Small	General	Deep	Bellows	Multi-bellows	Metal detectable	Skidproof	Flat (Large suction flow type)	Mark-free	Soft	Soft bellows	Sponge	Ultrathin	For packaging bag	Pad type or application
Code	RM	R	A	B	W	BE, BD	K	F, FH	Q	L	LB	S	P	PB	Code
0.7	○	○	○	○	○	○	○	○	○	○	○	○	○	○	2x4
1	○	○	○	○	○	○	○	○	○	○	○	○	○	○	3.5x7
1.5	○	○	○	○	○	○	○	○	○	○	○	○	○	○	4x10
2	○	○	○	○	○	○	○	○	○	○	○	○	○	○	5x10
3	○	○	○	○	○	○	○	○	○	○	○	○	○	○	6x10
4	○	○	○	○	○	○	○	○	○	○	○	○	○	○	4x20
6	○	○	○	○	○	○	○	○	○	○	○	○	○	○	4x30
8	○	○	○	○	○	○	○	○	○	○	○	○	○	○	5x30
10	○	○	○	○	○	○	○	○	○	○	○	○	○	○	6x30
15	○	○	○	○	○	○	○	○	○	○	○	○	○	○	8x20
20	○	○	○	○	○	○	○	○	○	○	○	○	○	○	8x30
25	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
30	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
35	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
40	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
50	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
60	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
70	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
80	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
100	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
150	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
200	○	○	○	○	○	○	○	○	○	○	○	○	○	○	

(4) Pad material (○: Available)

Code	N	S	U	F	SE	NE	G	HN	EP	FS	NH	YS2	YS4	MSF3	MSF5	MSS3	MSS5
Rubber material	Nitrile	Silicone	Urethane	Fluoro	Conductive silicone	Conductive NBR (Low resistance)	Food Sanit. Act compliant NBR	HNBR	EPDM	Fluoro-silicone	Oil proof NBR	Extra soft silicone	Iron powder type	SUS powder type	Metal detectable silicone		
Pad color	Black	Clear white	Dark blue	Gray	Black	Black	Light gray	Black	Black	Red-orange	Black	Pink	Blue	Reddish-brown	Dark-green	Brown	Green
Material code marking ¹⁾	None	None	None	None	SE	NE	None	HN	EP	None	None	None	None	SF	SF	SS	SS
Standard	General	Deep	Small														
Soft	L																
Soft bellows	LB																
Skidproof	K																
Bellows	B																
Multi-bellows	W																
For packaging bag	PB																
Metal Detectable	BE																
Ultrathin	P																
Flat	F																
Flat large suction flow	FH																
Oval	E																

● Mark-free type (Pad type code: Q)

Code	K	M	KE
Resin material	PEEK	POM	Conductive PEEK
Pad color	Beige	White	Black

● Sponge type (Pad type code: S)

Code	S	C
Rubber material	Silicone	Chloroprene
Pad color	Dark-orange	Black

¹⁾ For vacuum pads in black color (SE: Conductive silicone, NE: Conductive NBR (low resistance), HN: HNBR and EP: EPDM) and Vacuum pad Metal Detectable type, the pad material code is marked on the top or the side of the vacuum pad for material identification. (The marking on black vacuum pads has started since Oct. 2023 gradually.)



²⁾ Some materials are not available depending on pad size. Please see the catalog for details.

³⁾ Pad color of pads for Packaging bag. Lip hardness 20* (Pink) Lip hardness 40* (Blue)

⁴⁾ The Conductive Silicone rubber (SE) is a silicon rubber capable of releasing static electricity. (Volume resistance: More than 200 Ω·cm and 10⁵ Ω·cm or less)

⁵⁾ Nitrile rubber (N), Conductive NBR (Low resistance, Volume resistance: 200Ω·cm or less) (NE), Food Sanitation Act-compliant NBR (G), Oil proof NBR (NH) are not suitable for use with ozone environment.

⁶⁾ Extra soft silicone (YS2/YS4), Metal detectable silicone and Silicone for Packaging bag are compliant with Food Sanitation Act and FDA.

⁷⁾ Volume resistance of Conductive PEEK (KE) is 10⁵ to 10⁶ Ω·cm.

(5) Surface treatment (Optional) (○: Available)

Code	No code	-NF	-SF	-DL	-ER	-FG
Surface treatment	None	Fiber surface		DLC. coating	Reformed surface	Fluoro-coating
		Nylon fiber	Silk fiber			
Applicable pad material	—	Silicone (S) Fluoro (F)	Silicone (S) Fluoro (F)	Silicone (S) Fluoro (F) Conductive silicone (SE)	Nitrile (N) Conductive NBR (NE)	Silicone (S) Conductive silicone (SE) Extra soft silicone (YS2, YS4)
Pad type	General	R	—	○	○	○
	Deep	A	—	○	○	○
	Small	RM	—	—	○	○
	Soft	L	—	○	○	○
	Soft bellows	LB	—	○	○	○
	Skidproof	K	—	—	—	—
	Bellows	B	—	○	○	○
	Multi-bellows	W	—	—	○	○
	For packaging bag	PB	—	—	—	○
	Metal Detectable	BE, BD	—	—	—	—
	Ultrathin	P	—	—	○	○
	Flat	F	—	—	○	○
	Flat large suction flow	FH	—	—	○	○
	Mark-free	Q	—	—	—	—
	Sponge	S	—	—	—	—
	Oval	E	—	—	○	○

*Some surface treatments are not available depending on pad size.

Please refer to page 370 for the details of each pad surface type and treatment for Suction Mark-free.

(6) Connection configuration code (Required for Pad & screw set only.) Please refer to the Pad size and type list on the 374 page.

Code	No code	-M4	-M6	-M10	-M20	-M5 ^(*)
Connection config. code	—	M4	M6	M10	M20	—
Thread size	Pad rubber only	M4×0.7	M6×1	M10×1.5	M20×2	M5×0.8

*M5 thread is used for mounting on non-PISCO holders. Contact us for the price of screw set.

(7) Mark-free resin attachment material (Bellows type only) (Optional)

Code	No code	-QK	-QM	-QKE
Resin material	—	PEEK	POM	Conductive PEEK (Volume resistance: 10 ⁵ to 10 ⁶ Ω·cm)
	—			

¹⁾ Selectable for Bellows type pad dia. 10 to 30 mm.

²⁾ Resin attachment cannot be installed when selecting surface treatment.

³⁾ Resin attachment cannot be installed when selecting Extra soft silicone for pad material.

(8) -S3 spec. (Required for Pad & screw set only) (Optional)

Code	No code	-S3
Metal material	Standard	No copper-based metallic materials used in flow paths

Vacuum pad / Pad & screw set

Holders with the same "connection configuration code (M4 , M6 etc.)" can be connected. For connectable holders, please see the page of Pad holder only (page 384-).



Bellows series,

Pad rubber alone



P526

Model code	○: Available as standard item										Connection config. code
	④ Pad rubber material										
	N	S	YS2	YS4	U	F	SE	NE	HN	EP	
	Nitrile	Silicone	Extra soft silicone ⁽²⁾ Hardness 20*	Hardness 40*	Urethane	Fluoro	Conductive silicone	Conductive NBR (Low resistance)	HNBR	EPDM	
VP2B④	○	○	—	—	—	—	—	—	—	—	H3
VP4B④	○	○	—	—	—	—	○	—	—	—	
VP6B④⑤	○	○	—	—	○	○	○	○	○	○	T8
VP8B④⑤	○	○	—	—	○	○	○	○	○	○	
VP10B④⑤	○	○	(*)	(*)	○	○	○	○	○	○	M4③
VP15B④⑤	○	○	(*)	○	○	○	○	○	○	○	
VP20B④⑤	○	○	○	○	○	○	○	○	○	○	M6③
VP25B④⑤	○	○	○	○	○	○	○	○	○	○	
VP30B④⑤	○	○	○	○	○	○	○	○	○	○	
VP40B④⑤	○	○	○	○	○	○	○	○	○	○	
VP50B④⑤	○	○	○	○	○	○	○	○	○	○	
VP60B④⑤	○	○	—	—	○	○	○	○	○	○	M10③
VP80B④⑤	○	○	—	—	○	○	○	○	○	○	
VP100B④⑤	○	○	—	—	○	○	○	○	○	○	



Bellows series,
Pad & screw set

P526

Model code	○: Available as standard item										Connection config. code	
	④ Pad rubber material											⑧
	N	S	YS2	YS4	U	F	SE	NE	HN	EP		-S3
	Nitrile	Silicone	Extra soft silicone ⁽²⁾ Hardness 20*	Hardness 40*	Urethane	Fluoro	Conductive silicone	Conductive NBR (Low resistance)	HNBR	EPDM		-S3 spec.
VP10B④⑤-M4⑧	○	○	(*)	(*)	○	○	○	○	○	○	○	M4
VP15B④⑤-M4⑧	○	○	(*)	○	○	○	○	○	○	○	○	
VP20B④⑤-M6⑧	○	○	○	○	○	○	○	○	○	○	○	
VP25B④⑤-M6⑧	○	○	○	○	○	○	○	○	○	○	○	
VP30B④⑤-M6⑧	○	○	○	○	○	○	○	○	○	○	○	M6
VP40B④⑤-M6⑧	○	○	○	○	○	○	○	○	○	○	○	
VP50B④⑤-M6⑧	○	○	○	○	○	○	○	○	○	○	○	
VP60B④⑤-M10	○	○	—	—	○	○	○	○	○	○	(*)	M10
VP80B④⑤-M10⑧	○	○	—	—	○	○	○	○	○	○	○	
VP100B④⑤-M10⑧	○	○	—	—	○	○	○	○	○	○	○	

■ Available pad size and material for surface treatment (Bellows series)

Pad dia. (mm)	⑤ Surface treatment code					Model code	YS2	YS4	⑧	-S3	Connection config. code
	-NF	-SF	-DL	-ER	-FG						
	Fiber surface Nylon	Silk coating	DLC coating	Reformed surface	Fluoro-coating (S, SE) (YS2, YS4)						
φ6	—	—	○	○	○	 	 	—	—	—	
φ8	—	—	○	○	○						
φ10	—	—	○	○	○						
φ15	○	○	○	○	○						
φ20	○	○	○	○	○						
φ25	○	○	○	○	○						
φ30	○	○	○	○	○						
φ40	○	○	○	○	○						
φ50	○	○	○	○	○						
φ60	○	○	—	○	○						
φ80	○	○	—	—	○						
φ100	—	—	—	—	○						
Material	S, F	S, F, SE	N, NE	S, SE, YS2, YS4		Pad & screw set					M4
						VP10B④-FG-M4⑧	○	○	○		
						VP15B④-FG-M4⑧	○	—	○		

*4. Fluoro-coating of Extra soft silicone (YS2, YS4)
For Extra soft silicone pads, dia. 10 mm or 15 mm of 20° hardness type (YS2) and dia. 10 mm of 40° hardness type (YS4) can be selected only when Fluoro-coating treatment is selected.

Notes
 *1. For Pad & screw set of Bellows series 60 mm pad dia., the standard spec. is equivalent to "-S3" spec.
 *2. Extra soft silicone is compliant with Food Sanitation Act and FDA.
 *3. A pad screw is required to mount on the holder. If you do not have a pad screw, please select from the Pad & screw set.

CAD data is available at PISCO website.
 Packaging specifications 1 pc./bag
 Options
 ⑤ : Surface treatment
 ⑧ : -S3 ⇒ -S3 spec.

Holders with the same "connection configuration code (M4 , M6 etc.)" can be connected. For connectable holders, please see the page of Pad holder only (page 384-).

Bellows series, with Resin attachment

P526

Picture of mark-free resin attachment with pad

By attaching a resin attachment, bellows pad (pad dia.: 10 to 30 mm) can be used as Mark-free pad.

Model code	○: Available as standard item								Connection config. code	
	④ Pad rubber material									
	N	S	U	F	SE	NE	HN	EP		
	Nitrile	Silicone	Urethane	Fluoro	Conductive silicone	Conductive NBR (Low resistance)	HNBR	EPDM		
VP10B④-QK	○	○	○	○	○	○	○	○	M4③	
VP10B④-QM	○	○	○	○	○	○	○	○		
VP10B④-QKE	○	○	○	○	○	○	○	○		
VP15B④-QK	○	○	○	○	○	○	○	○		
VP15B④-QM	○	○	○	○	○	○	○	○		
VP15B④-QKE	○	○	○	○	○	○	○	○	M6③	
VP20B④-QK	○	○	○	○	○	○	○	○		
VP20B④-QM	○	○	○	○	○	○	○	○		
VP20B④-QKE	○	○	○	○	○	○	○	○		
VP25B④-QK	○	○	○	○	○	○	○	○		
VP25B④-QM	○	○	○	○	○	○	○	○		
VP25B④-QKE	○	○	○	○	○	○	○	○		
VP30B④-QK	○	○	○	○	○	○	○	○	M6③	
VP30B④-QM	○	○	○	○	○	○	○	○		
VP30B④-QKE	○	○	○	○	○	○	○	○		

Pad holder

● How to attach


- (1) Fix a bellows pad and a pad holder with a pad screw.
- (2) Attach a resin attachment to the bellows pad.

Bellows
pad

Pad screw

Resin
attachment

Picture of mark-free resin attachment with pad
 By attaching a resin attachment, bellows pad (pad dia.: 10 to 30 mm) can be used as Mark-free pad.

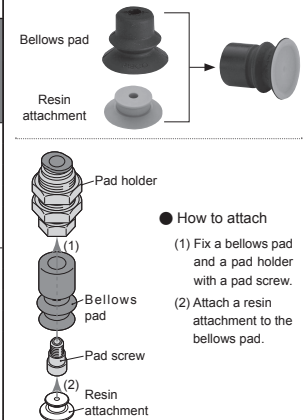



Bellows series,

Pad & screw set + Resin attachment



P526

Model code	○: Available as standard item									Connection config. code
	④ Pad rubber material									
	N	S	U	F	SE	NE	HN	EP	-S3	
	Nitrile	Silicone	Urethane	Fluoro	Conductive silicone	Conductive NBR (Low resistance)	HNBR	EPDM	-S3 spec.	
VP10B④-M4-QK⑧	○	○	○	○	○	○	○	○	○	M4
VP10B④-M4-QM⑧	○	○	○	○	○	○	○	○	○	
VP10B④-M4-QKE⑧	○	○	○	○	○	○	○	○	○	
VP15B④-M4-QK⑧	○	○	○	○	○	○	○	○	○	
VP15B④-M4-QM⑧	○	○	○	○	○	○	○	○	○	
VP15B④-M4-QKE⑧	○	○	○	○	○	○	○	○	○	M6
VP20B④-M6-QK⑧	○	○	○	○	○	○	○	○	○	
VP20B④-M6-QM⑧	○	○	○	○	○	○	○	○	○	
VP20B④-M6-QKE⑧	○	○	○	○	○	○	○	○	○	
VP25B④-M6-QK⑧	○	○	○	○	○	○	○	○	○	
VP25B④-M6-QM⑧	○	○	○	○	○	○	○	○	○	
VP25B④-M6-QKE⑧	○	○	○	○	○	○	○	○	○	M6
VP30B④-M6-QK⑧	○	○	○	○	○	○	○	○	○	
VP30B④-M6-QM⑧	○	○	○	○	○	○	○	○	○	
VP30B④-M6-QKE⑧	○	○	○	○	○	○	○	○	○	
VP30B④-M6-QM⑧	○	○	○	○	○	○	○	○	○	
VP30B④-M6-QKE⑧	○	○	○	○	○	○	○	○	○	



Mark-free resin attachment for

Bellows series



P526

Model code	○: Available as standard item		
	④ Resin attachment material		
	K	M	KE
	PEEK	POM	Conductive PEEK
VP10BQ④-AT	○	○	○
VP15BQ④-AT	○	○	○
VP20BQ④-AT	○	○	○
VP25BQ④-AT	○	○	○
VP30BQ④-AT	○	○	○

Mark-free resin attachment for Bellows series

Model code	○: Available as standard item		
	④ Resin attachment material		
	K	M	KE
	PEEK	POM	Conductive PEEK
VP10BQ④-AT	○	○	○
VP15BQ④-AT	○	○	○
VP20BQ④-AT	○	○	○
VP25BQ④-AT	○	○	○
VP30BQ④-AT	○	○	○

Notes
 *1. A pad screw is required to mount on the holder. If you do not have a pad screw, please select from the Pad & screw set.
 *2. Resin attachment must be used with a vacuum pad for work conveyance.

CAD data is available at PISCO website.
 Packaging specifications 1 pc./bag
 Options
 ⑧ : -S3 ⇒ -S3 spec.

Vacuum pad / Pad & screw set

Holders with the same "connection configuration code" (M4, M6, etc.) can be connected. For connectable holders, please see the page of Pad holder only (page 384-).

Flat series, Pad rubber alone								Flat series, Pad & screw set								
Model code	○: Available as standard item						Connection config. code	Model code	○: Available as standard item						Connection config. code	
	④ Pad rubber material								④ Pad rubber material							⑧
	N	S	U	F	SE	NE			N	S	U	F	SE	NE		-S3
	Nitrile	Silicone	Urethane	Fluoro	Conductive silicone	Conductive NBR (Low resistance)			Nitrile	Silicone	Urethane	Fluoro	Conductive silicone	Conductive NBR (Low resistance)		-S3 spec.
VP10F④⑤	○	○	○	○	○	○	M4⑥⑦	VP10F④⑤-M4⑧	○	○	○	○	○	○	M4	
VP15F④⑤	○	○	○	○	○	○		VP15F④⑤-M4⑧	○	○	○	○	○	○		
VP20F④⑤	○	○	○	○	○	○	M6⑥⑦	VP20F④⑤-M6⑧	○	○	○	○	○	○	M6	
VP25F④⑤	○	○	○	○	○	○		VP25F④⑤-M6⑧	○	○	○	○	○	○		
VP30F④⑤	○	○	○	○	○	○		VP30F④⑤-M6⑧	○	○	○	○	○	○		

 Flat large suction flow series, Pad rubber alone							 P622	 Flat large suction flow series, Pad & screw set							 P622
Model code	○: Available as standard item					Connection config. code	Model code	○: Available as standard item					Connection config. code		
	④ Pad rubber material							④ Pad rubber material							
	N	S	F	SE	NE			N	S	F	SE	NE		⑤	
	Nitrile	Silicone	Fluoro	Conductive silicone	Conductive NBR (Low resistance)			Nitrile	Silicone	Fluoro	Conductive silicone	Conductive NBR (Low resistance)		-S3 spec.	
VP10FH④⑤	○	○	○	○	○	M4⑥⑦	VP10FH④⑤-M4⑧	○	○	○	○	○	○	M4	
VP15FH④⑤	○	○	○	○	○		VP15FH④⑤-M4⑧	○	○	○	○	○	○		
VP20FH④⑤	○	○	○	○	○	M6⑥⑦	VP20FH④⑤-M6⑧	○	○	○	○	○	○	M6	
VP25FH④⑤	○	○	○	○	○		VP25FH④⑤-M6⑧	○	○	○	○	○	○		
VP30FH④⑤	○	○	○	○	○		VP30FH④⑤-M6⑧	○	○	○	○	○	○		

									
Mark-free series, Resin pad alone				Mark-free series, with Flexible Swing Joint					
Model code	○: Available as standard item			Connection config. code	Model code	○: Available as standard item			Connection config. code
	④ Pad rubber material					④ Pad rubber material			
	K	M	KE			K	M	KE	
	PEEK	POM	Conductive PEEK		PEEK	POM	Conductive PEEK	-S3 spec.	
VP10Q④	○	○	○	M4⑥⑦⑧	VP10Q④-M4⑧	○	○	○	M4
VP20Q④	○	○	○	M6⑥⑦⑧	VP20Q④-M6⑧	○	○	○	M6
VP30Q④	○	○	○		VP30Q④-M6⑧	○	○	○	



Sponge series, Pad rubber alone

P.656



Sponge series, Pad & screw set

P.656

○: Available as standard item ④ Pad rubber material C S Chloroprene Silicone				Connection config. code	○: Available as standard item ④ Pad rubber material ⑧ C S -S3 Chloroprene Silicone -S3 spec.				Connection config. code
Model code					Model code				
VP10S④	○	○		M6⑥⑦	VP10S④-M6⑧	○	○	○	M6
VP15S④	○	○			VP15S④-M6⑧	○	○	○	
VP20S④	○	○			VP20S④-M6⑧	○	○	○	
VP25S④	○	○			VP25S④-M6⑧	○	○	○	
VP30S④	○	○			VP30S④-M6⑧	○	○	○	
VP35S④	○	○		M10⑥⑦	VP35S④-M6⑧	○	○	○	M10
VP50S④	○	○			VP50S④-M6⑧	○	○	○	
VP70S④	○	○			VP70S④-M10	○	○	(*)	
VP100S④	○	○			VP100S④-M10	○	○	(*)	

- Notes**
- *1. A pad screw is required to mount on the holder. If you do not have a pad screw, please select from the Pad & screw set.
 - *2. A Flexible Swing Joint is required to mount on the holder. If you do not have a Flexible Swing Joint, please select from the Mark-free series, with Flexible Swing Joint set.
 - *3. For Pad & screw set of Sponge series 70 mm and 100 mm pad dia., the standard spec. is equivalent to "-S3" spec.

CAD data is available
at PISCO website.

Packaging specifications
1 pc./bag

Options
⑤ : Surface treatment
⑧ : -S3 ⇒ -S3 spec.

Holders with the same "connection configuration code" (E10, E20, etc.) can be connected. For connectable holders, please see the page of Pad holder only (page 384-).


P880

 Oval series, Pad rubber alone											
Model code	○: Available as standard item								Connection config. code		
	④ Pad rubber material										
	N	S	U	F	SE	NE	HN	EP			
	Nitrile	Silicone	Urethane	Fluoro	Conductive silicone	Conductive NBR (Low resistance)	HNBR	EPDM			
VP2×4E④⑤	○	○	○	○	○	○	○	○		E10	
VP3.5×7E④⑤	○	○	○	○	○	○	○	○			
VP4×10E④⑤	○	○	○	○	○	○	○	○		E20	
VP4×20E④⑤	○	○	○	○	○	○	○	○			
VP4×30E④⑤	○	○	—	—	○	○	○	○		E10	
VP5×10E④⑤	○	○	○	○	○	○	○	○			
VP5×20E④⑤	○	○	○	○	○	○	○	○		E20	
VP5×30E④⑤	○	○	○	○	○	○	○	○			
VP6×10E④⑤	○	○	○	○	○	○	○	○		E10	
VP6×20E④⑤	○	○	○	○	○	○	○	○			
VP6×30E④⑤	○	○	○	○	○	○	○	○		E20	
VP8×20E④⑤	○	○	○	○	○	○	○	○			
VP8×30E④⑤	○	○	○	○	○	○	○	○			

Oval series, Pad & screw set

P.680

Model code	○: Available as standard item									
	④ Pad rubber material									⑧
	N	S	U	F	SE	NE	HN	EP	-S3	
	Nitrile	Silicone	Urethane	Fluoro	Conductive silicone	Conductive NBR (Low resistance)	HNBR	EPDM	-S3 spec.	
VP2×4E④⑤-M6⑧	○	○	○	○	○	○	○	○	○	
VP3.5×7E④⑤-M6⑧	○	○	○	○	○	○	○	○	○	
VP4×10E④⑤-M6⑧	○	○	○	○	○	○	○	○	○	
VP4×20E④⑤-M6⑧	○	○	○	○	○	○	○	○	○	
VP4×30E④⑤-M6⑧	○	○	—	—	○	○	○	○	○	
VP5×10E④⑤-M6⑧	○	○	○	○	○	○	○	○	○	
VP5×20E④⑤-M6⑧	○	○	○	○	○	○	○	○	○	
VP5×30E④⑤-M6⑧	○	○	○	○	○	○	○	○	○	
VP6×10E④⑤-M6⑧	○	○	○	○	○	○	○	○	○	
VP6×20E④⑤-M6⑧	○	○	○	○	○	○	○	○	○	
VP6×30E④⑤-M6⑧	○	○	○	○	○	○	○	○	○	
VP8×20E④⑤-M6⑧	○	○	○	○	○	○	○	○	○	
VP8×30E④⑤-M6⑧	○	○	○	○	○	○	○	○	○	

Connection
config. code

M6


- Notes**
- *A pad screw is required to mount on the holder. If you do not have a pad screw, please select from the Pad & screw set.
- CAD data is available
at PISCO website.
- Packaging specifications
1 pc./bag
- Options
⑤ : Surface treatment
⑧ : -S3 ⇒ -S3 spec.

Available pad size and material
for surface treatment
(Oval series)


Pad dia. (mm)	⑤ Surface treatment code		
	-DL DLC coating	-ER Reformed surface	-FG Fluoro- coating
2×4	○	○	○
3.5×7	○	○	○
4×10	○	○	○
4×20	○	○	○
4×30	○	○	○
5×10	○	○	○
5×20	○	○	○
5×30	○	○	○
6×10	○	○	○
6×20	○	○	○
6×30	○	○	○
8×20	○	○	○
8×30	○	○	○
Material	S, F, SE	N, NE	S, SE

Vacuum Pad Configuration


Pad dia. : $\phi 0.7, \phi 1, \phi 1.5, \phi 2, \phi 3, \phi 4$ mm

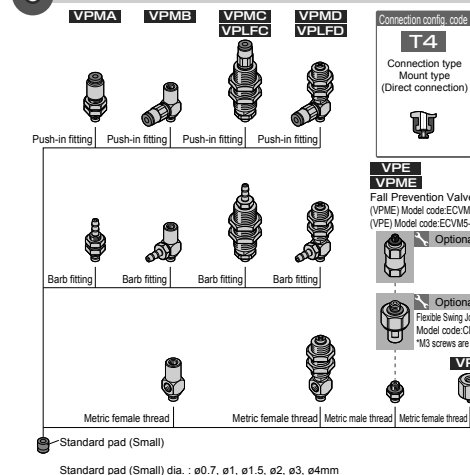


Pad dia. : $\phi 1, \phi 2, \phi 3, \phi 4$ mm

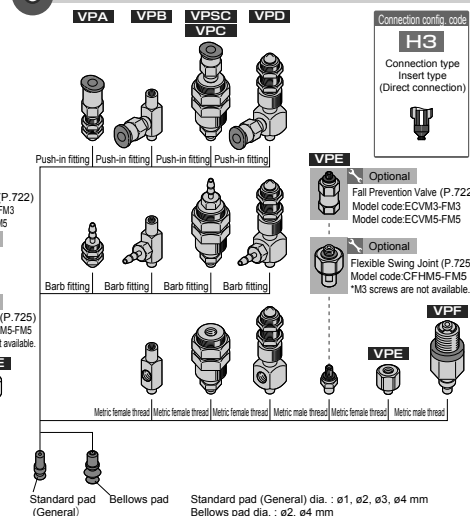

Pad dia. : $\phi 6, \phi 8, \phi 10, \phi 15, \phi 20$ mm

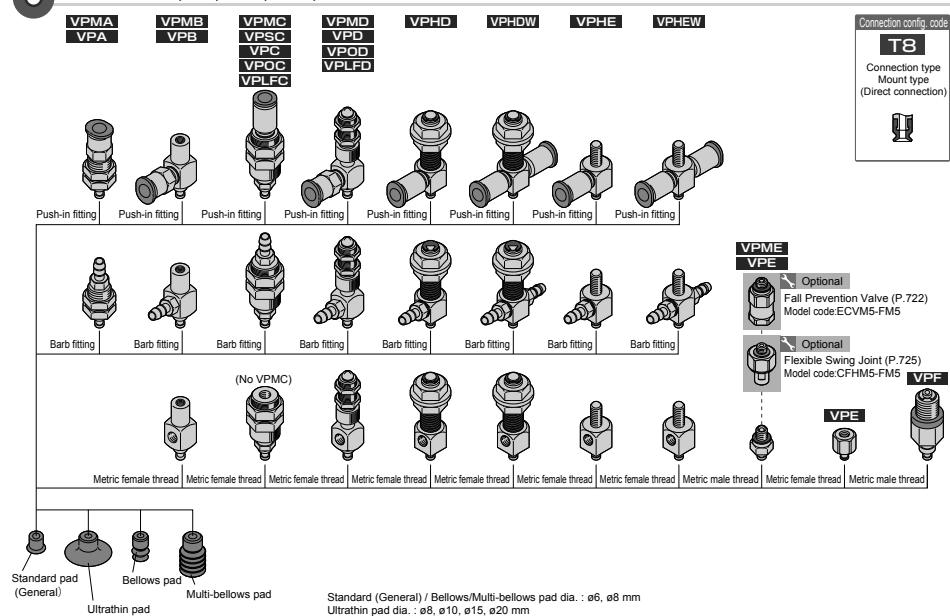

Pad dia. : $\phi 4, \phi 6, \phi 8, \phi 10, \phi 15$ mm

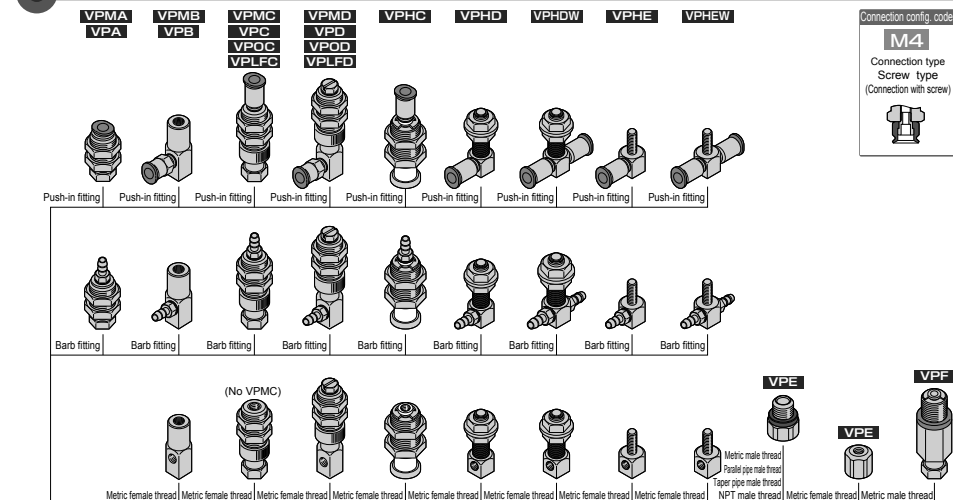

Fall Prevention Valve (P.722)
 Model code: ECVM4-FM4

Optional

Ball Swivel Joint (P.724)
 Model code: FH10
 FH10-15

Optional


Flexible Swing Joint (P.725)
 Model code: CFHM4-FM4

Optional

*Ball Swivel Joint and Flexible Swing Joint cannot be attached to Mark-free type pad.

Pad Direct Mounting Filter (P.726)
 Model code: VFF15-M4

Optional

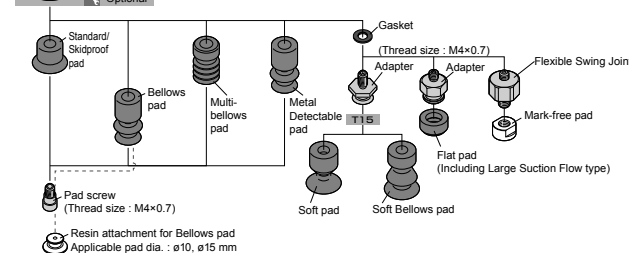

Standard pad dia.: $\phi 10, \phi 15$ mm

Skidproof pad dia.: $\phi 10$ mm

Belows pad dia.: $\phi 10, \phi 15$ mm

Metal Detectable pad dia.: $\phi 10, \phi 15$ mm

Multi-bellows pad dia.: $\phi 10$ mm

Soft pad dia.: $\phi 4, \phi 6, \phi 8, \phi 10, \phi 15$ mm

Soft-bellows pad dia.: $\phi 6, \phi 8, \phi 10, \phi 15$ mm

Flat pad dia.: $\phi 10, \phi 15$ mm (Including Large Suction Flow type)

Mark-free pad dia.: $\phi 10$ mm

Vacuum Pad Configuration

Pad dia. : ø4, ø6, ø8, ø10, ø15 mm (Exclusive to Soft and Soft Bellows type)

VPHC

VPHD

VPHDW

VPHE

VPHEW

Push-in fitting

Push-in fitting

Push-in fitting

Push-in fitting

Push-in fitting

Barb fitting

Barb fitting

Barb fitting

Barb fitting

Barb fitting

Metric female thread

Metric female thread

Metric female thread

Metric female thread

Metric female thread

Metric male thread

Parallel pipe male thread

Taper pipe male thread

NPT male thread

Metric female thread

Soft pad

Soft Bellows pad

Soft pad dia. : ø4, ø6, ø8, ø10, ø15 mm

Soft-bellows pad dia. : ø6, ø8, ø10, ø15 mm

Connection config. code

T15

Connection type

Mount type

(Direct connection)

Pad dia. : ø20, ø30, ø40 mm (Exclusive to Soft and Soft Bellows type)

VPHC

VPHD

VPHDW

VPHE

VPHEW

Push-in fitting

Push-in fitting

Push-in fitting

Push-in fitting

Push-in fitting

Barb fitting

Barb fitting

Barb fitting

Barb fitting

Barb fitting

Metric female thread

Metric female thread

Metric female thread

Metric female thread

Metric female thread

Metric male thread

Parallel pipe male thread

Taper pipe male thread

NPT male thread

Metric female thread

Soft pad

Soft Bellows pad

Soft pad dia. : ø20, ø30, ø40 mm

Soft-bellows pad dia. : ø20 mm

Connection config. code

T40

Connection type

Mount type

(Direct connection)

Pad dia. : ø20, ø25 mm (Exclusive to Vacuum pad for packaging bag)

VPA

VPE

Push-in fitting

Metric male thread

Parallel pipe male thread

Packaging bag pad 3 convolutions

Packaging bag pad 5 convolutions

Over-suction preventing adapter Spherical type

Over-suction preventing adapter Plane type

With stainless steel mesh

Connection config. code

PB8

Connection type

Mount type

(Direct connection)

Pad dia. : ø30, ø40, ø50 mm (Exclusive to Vacuum pad for packaging bag)

VPA

VPE

Push-in fitting

Metric male thread

Parallel pipe male thread

Packaging bag pad 3 convolutions

Packaging bag pad 5 convolutions

Over-suction preventing adapter Spherical type

Over-suction preventing adapter Plane type

With stainless steel mesh

Connection config. code

PB15

Connection type

Mount type

(Direct connection)

Pad size : 2×4, 3.5×7, 4 to 6×10 mm (Exclusive to Oval type)

VPAE

VPBE

Push-in fitting

Push-in fitting

Barb fitting

Barb fitting

Metric female thread

Metric female thread

Oval pad

Connection config. code

E10

Connection type

Mount type

(Direct connection)

Pad size : 4 to 8×20 mm, 4 to 8×30 mm (Exclusive to Oval type)

VPAE

VPBE

Push-in fitting

Push-in fitting

Barb fitting

Barb fitting

Metric female thread

Metric female thread

Oval pad

Connection config. code

E20

Connection type

Mount type

(Direct connection)