

Vacuum Pad Sponge Type

Vacuum pad for work-piece with rough surface like exterior wall panel or pebble.

⚠ Safety instructions for this product

Safety instructions, Common safety instructions for each product category and Detailed safety instructions for each product are in the end of this catalog and our website.

Model Designation (Example)

VP (1)	C (2)	10 (3)	-6 (4)	S (5)	C (6)	-6J (7)	-DC (8)	-ECV (9)	-FH (10)	-F15 (11)	(12)
							Optional	Optional	Optional	Optional	Optional

(1) Vacuum Pad

(2) Holder type

Holder type	Fixed type		Spring type				Low dust emission	Holder type	Lightweight	Low profile
	Mini	Standard	Mini	Standard	No cover				Spring type	Direct mount
Code								Code		
Top port	MA	A	MC	C	OC	LFC		Top port	HC	-
Side port	MB	B	MD	D	OD	LFD		Side port	HD	HE
Direct mount	-	E	-	F (*)	-	-		Dual side port	HDW	HEW
Connection config. code	M6	M6 M10	M6	M6 M10	M6	M6		Connection config. code	M6	M6

*F holder is available only for configuration code: M6.

(3) Pad dia.

Code	10	15	20	25	30	35	50	70	100
Pad dia. (mm)	ø10	ø15	ø20	ø25	ø30	ø35	ø50	ø70	ø100
Connection config. code			M6					M10	

(4) Stroke (No code entry for Holder type: MA, A, MB, B, E, F, HE and HEW)

Code	-4	-5	-6	-10	-15	-20	-25	-30	-40	-50
Stroke (mm)	4	5	6	10	15	20	25	30	40	50
Connection config. code	●: M6								●: M10	
Spring type holder code	VPMC									
	VPC									
	VPOC									
	VPLFC									
	VPMD									
	VPD									
	VPOD									
	VPLFD									
	VPHC									
	VPHD									
	VPHDW									


(5) Pad type S: Sponge

(6) Pad material

Code	C	S
Rubber material	Chloroprene	Silicone

(7) Vacuum port size and joint type (No code entry for Holder type: F) (○: Available)

Type	Push-in fitting												Barb fitting				Female thread					
	mm size (mm)						inch size (inch)						mm size (mm)		inch size (inch)		Metric thread	Parallel pipe thread	NPT thread			
Code	-180J	-2J	-3J	-4J	-6J	-8J	-1/8J	-5/32J	-3/16J	-1/4J	-5/16J	-3/8J	-3B	-4B	-6B	-1/4B	-M5	-M6	-G1	-N1		
Tube O.D.	ø1.8	ø2	ø3	ø4	ø6	ø8	ø1/8	ø5/32	ø3/16	ø1/4	ø5/16	ø3/8										
Tube I.D.													ø2	ø2.5	ø4	Polyurethane tube ø0.163 Nylon tube ø0.180						
Thread size																		M5×0.8	M6×1	G1/8	NPT1/8	
Holder type	VPMA																					
	VPA																					
	VPMB																					
	VPB																					
	VPMC																					
	VPC																					
	VPOC																					
	VPLFC																					
	VPMD																					
	VPD																					
	VPOD																					
	VPLFD																					
VPHC																						
VPHD																						
VPHDW																						
VPHE																						
VPHEW																						



*The barb fitting of 5/32" size is common with 4 mm size. Please order with the code: -4B.

*Available port size varies depending on pad dia. See model code lists on the following pages.

Type	Male thread															Female thread		
	Metric thread				Taper pipe thread				Parallel pipe thread				NPT thread			Metric thread		
Code	-M8	-M10	-M12	-M14	-R1	-R2	-R3	-R4	-G1	-G2	-G3	-G4	-N1	-N2	-N3	-N4	-FM5	-FM8
Thread size	M8x1.25	M10x1.5	M12x1.75	M14x2	R1/8	R1/4	R3/8	R1/2	G1/8	G1/4	G3/8	G1/2	NPT1/8	NPT1/4	NPT3/8	NPT1/2	M5x0.8	M8x1.25
Holder type	VPE																	

*Configuration code: M10 is not available for M8, M10, FM5 and FM8 thread size.

(8) Dust Catcher (Holder type: C, D and F only) Optional

Code	No code	-DC
Dust Catcher	None	Installed

*Note that the holder stroke becomes shorter when a dust catcher is installed. Please visit our website for details.



(8) Spring load (Holder type: LFC only)

Code	No code	-SF1/4
Load	Standard load	Low load (1/4 of standard load)

(9) Fall Prevention Valve Optional

Code	No code	-ECV
Fall Prevention Valve	None	Installed


*-S3 spec. is not selectable when Fall Prevention Valve is selected.



(10) Swivel Joint for vacuum pad Optional

Code	No code	-FH	-FHH	-CFH
Option	None	Ball Swivel Joint (Swivel angle: 30°)	Ball Swivel Joint (Swivel angle: 15°)	Flexible Swing Joint (Swing angle: 8°)
Applicable config. code	—	M6, M10		M6

*-S3 spec. is not selectable when Ball Swivel Joint is selected.



(11) Filter Optional

Code	No code	-F15	-F30
Filter	None	Installed (Filter area 1.7 cm²)	Installed (Filter area 7 cm²)
Applicable config. code	—	M6	

*1. -S3 spec. is not selectable when Filter is selected.

*2. "-F30" is recommended when much dust is expected at sucking work pieces.



(12) -S3 spec. Optional

Code	No code	-S3
Metal material	Standard	No copper-based metallic materials used in flow paths.
Seal rubber material	Standard	HNBR or FKM
Release ring color	Black	Dark blue

*1. -S3 spec. is not available for the following fittings and holders:

- Push-in fitting with dia. size of 1.8, 2, 3 mm and inch sizes except dia. 1/8" (some) and 5/32".

- Barb fitting with dia. of 1/4".

- Pad holder with stroke length 10 mm or longer (except for pad dia. 70 mm or larger and VPHC holders).


- VPLFC and VPLFD holders.

*2. For inch size push-in fitting, the release ring color is white even for "-S3 spec."

Characteristics

Best suitable for work like an external wall material of building, small stone and seashell.

Closed-cell sponge absorbs the surface roughness of the work-piece.

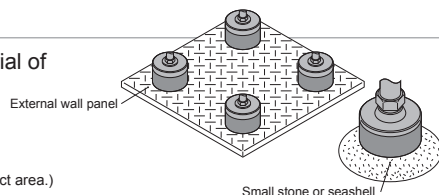

Pad dia. 9 types
 ø10 to ø100mm
 Pad material 2 types

Silicone (S) is Food Sanitation Act compliant.

(Holder is not compliant. Vacuum pad complies only at work-piece contact area.)


With its high density, Silicone rubber pad has less deformation against compression. It also has an excellent mechanical strength, wear resistance, and durability.

*See page 6 for the details of the Food Sanitation Act.

Wide variations of Pad holders.

The following combinations of holder and pad rubber are also available although they are not listed on the model code list from the next page onward. Contact us for the details.

- Lightweight VPHC holder that is made of resin and aluminum.
- Lightweight VPHD and VPHDW holders with spring type without cover.
- VPHE and VPHEW holders with reduced height.
- VPHDW and VPHEW holders with dual side vacuum ports, suitable for piping connection of multiple vacuum pads.



Low dust emission holders (VPLFC, VPLFD) with low noise and less wear from sliding are available to prevent dust generation.

VPLFC holder with top port has a separate shaft on the pad side and the vacuum port side, so there is no effect on the stroke caused by the tension of the tube. Low load type is also available to suppress impact when contacting the work-piece.

Wide variations of fixed type direct mount holder (VPE) for various thread sizes.

Metric male threads, metric female threads, taper pipe threads, parallel pipe threads and NPT threads are available.

*Only a part of the combinations are shown on the model code list from the next page onward. Contact us for the details.

● Holder with dust catcher (Optional)

Collects wear debris generated by sliding spring type holders.

Low-cost, simple holder with receiver tray added.

Applicable to VPC, VPD and VPF holders.



● Accessories (Optional)

Fall Prevention Valve, Swivel (Ball Swivel Joint, Flexible Swing Joint) and Filter options are available.

● -S3 spec. (Optional)

No copper-based metallic materials used in flow paths.

The sealing rubber material of the fitting is HNBR or FKM, with good ozone resistance.

RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad dia. (mm)	Tube O.D. (mm)	Model code	12-S3 spec.	Connection config. code	Pad dia. (mm)	Tube O.D. (inch)	Model code	12-S3 spec.	Connection config. code
Fixed type, Top port, Push-in fitting, Mini VPMA	ø10	ø4	VPMA10S[6]-4J12	○	M6	ø10	ø5/32	VPMA10S[6]-5/32J12	○	M6
	ø15	ø4	VPMA15S[6]-4J12	○		ø15	ø5/32	VPMA15S[6]-5/32J12	○	
	ø20	ø4	VPMA20S[6]-4J12	○		ø20	ø5/32	VPMA20S[6]-5/32J12	○	
	ø25	ø4	VPMA25S[6]-4J12	○		ø25	ø5/32	VPMA25S[6]-5/32J12	○	
	ø30	ø4	VPMA30S[6]-4J12	○		ø30	ø5/32	VPMA30S[6]-5/32J12	○	
	ø35	ø4	VPMA35S[6]-4J12	○		ø35	ø5/32	VPMA35S[6]-5/32J12	○	
	ø50	ø4	VPMA50S[6]-4J12	○		ø50	ø5/32	VPMA50S[6]-5/32J12	○	

Holder type	Pad dia. (mm)	Tube O.D. (mm)	Model code	12-S3 spec.	Connection config. code	Pad dia. (mm)	Tube O.D. (inch)	Model code	12-S3 spec.	Connection config. code
Fixed type, Top port, Push-in fitting, Standard VPA	ø10	ø3	VPA10S[6]-3J	—	M6	ø10	ø1/8	VPA10S[6]-1/8J	—	M6
		ø4	VPA10S[6]-4J12	○			ø5/32	VPA10S[6]-5/32J12	○	
		ø6	VPA10S[6]-6J12	○			ø1/4	VPA10S[6]-1/4J	—	
	ø15	ø3	VPA15S[6]-3J	—		ø15	ø1/8	VPA15S[6]-1/8J	—	
		ø4	VPA15S[6]-4J12	○			ø5/32	VPA15S[6]-5/32J12	○	
		ø6	VPA15S[6]-6J12	○			ø1/4	VPA15S[6]-1/4J	—	
	ø20	ø3	VPA20S[6]-3J	—		ø20	ø1/8	VPA20S[6]-1/8J	—	
		ø4	VPA20S[6]-4J12	○			ø5/32	VPA20S[6]-5/32J12	○	
		ø6	VPA20S[6]-6J12	○			ø1/4	VPA20S[6]-1/4J	—	
	ø25	ø3	VPA25S[6]-3J	—		ø25	ø1/8	VPA25S[6]-1/8J	—	
		ø4	VPA25S[6]-4J12	○			ø5/32	VPA25S[6]-5/32J12	○	
		ø6	VPA25S[6]-6J12	○			ø1/4	VPA25S[6]-1/4J	—	
	ø30	ø3	VPA30S[6]-3J	—		ø30	ø1/8	VPA30S[6]-1/8J	—	
		ø4	VPA30S[6]-4J12	○			ø5/32	VPA30S[6]-5/32J12	○	
		ø6	VPA30S[6]-6J12	○			ø1/4	VPA30S[6]-1/4J	—	
	ø35	ø3	VPA35S[6]-3J	—		ø35	ø1/8	VPA35S[6]-1/8J	—	
		ø4	VPA35S[6]-4J12	○			ø5/32	VPA35S[6]-5/32J12	○	
		ø6	VPA35S[6]-6J12	○			ø1/4	VPA35S[6]-1/4J	—	
	ø50	ø3	VPA50S[6]-3J	—		ø50	ø1/8	VPA50S[6]-1/8J	—	
		ø4	VPA50S[6]-4J12	○			ø5/32	VPA50S[6]-5/32J12	○	
		ø6	VPA50S[6]-6J12	○			ø1/4	VPA50S[6]-1/4J	—	
	ø70	ø4	VPA70S[6]-4J	—		ø70	ø1/8	VPA70S[6]-1/8J	—	
		ø6	VPA70S[6]-6J	—			ø5/32	VPA70S[6]-5/32J	—	
		ø8	VPA70S[6]-8J	—			ø3/16	VPA70S[6]-3/16J	—	
	ø100	ø4	VPA100S[6]-4J	—		ø100	ø1/4	VPA70S[6]-1/4J	—	
		ø6	VPA100S[6]-6J	—			ø5/16	VPA70S[6]-5/16J	—	
		ø8	VPA100S[6]-8J	—			ø3/8	VPA70S[6]-3/8J	—	
						ø100	ø1/8	VPA100S[6]-1/8J	—	M10
							ø5/32	VPA100S[6]-5/32J	—	
							ø3/16	VPA100S[6]-3/16J	—	
							ø1/4	VPA100S[6]-1/4J	—	
							ø5/16	VPA100S[6]-5/16J	—	

Holder type	Pad dia. (mm)	Male thread size	Model code	12-S3 spec.	Connection config. code
Fixed type, Top port, Female thread, Standard VPA	ø10	M6×1	VPA10S[6]-M612	○	M6
	ø15	M6×1	VPA15S[6]-M612	○	
	ø20	M6×1	VPA20S[6]-M612	○	
	ø25	M6×1	VPA25S[6]-M612	○	
	ø30	M6×1	VPA30S[6]-M612	○	
	ø35	M6×1	VPA35S[6]-M612	○	
	ø50	M6×1	VPA50S[6]-M612	○	
	ø70	G1/8	VPA70S[6]-G112	○	
	ø100	G1/8	VPA100S[6]-G112	○	
	ø70	NPT1/8	VPA70S[6]-N1	—	M10
	ø100	NPT1/8	VPA100S[6]-N1	—	

Notes

*Barb fitting type holders are also selectable. Contact us for the details.



CAD data is available at PISCO website.



Packaging specifications 1 pc./bag



Options
 12: -S3 ⇒ -S3 spec. (○ in the lists: Available)

*1. For "-S3 spec.", the release ring color is dark blue, and the gasket material is FKM+SUS316.

*2. For inch size push-in fitting, the release ring color is white even for "-S3 spec."



Vacuum Pad Sponge Type

RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad dia. (mm)	Tube O.D. (mm)	Model code	12 -S3 -S3 spec.	Connection config. code	Pad dia. (mm)	Tube O.D. (mm)	Model code	12 -S3 -S3 spec.	Connection config. code	
Fixed type, Side port, Push-in fitting, Mini VPMB 	ø10	ø3	VPMB10S[6]-3J	—	M6	ø10	ø1/8	VPMB10S[6]-1/8J	—	M6	
		ø4	VPMB10S[6]-4J12	○			ø5/32	VPMB10S[6]-5/32J12	○		
		ø6	VPMB10S[6]-6J12	○			ø1/4	VPMB10S[6]-1/4J	—		
	ø15	ø3	VPMB15S[6]-3J	—		ø15	ø1/8	VPMB15S[6]-1/8J	—		
		ø4	VPMB15S[6]-4J12	○			ø5/32	VPMB15S[6]-5/32J12	○		
		ø6	VPMB15S[6]-6J12	○			ø1/4	VPMB15S[6]-1/4J	—		
	ø20	ø3	VPMB20S[6]-3J	—		ø20	ø1/8	VPMB20S[6]-1/8J	—		
		ø4	VPMB20S[6]-4J12	○			ø5/32	VPMB20S[6]-5/32J12	○		
		ø6	VPMB20S[6]-6J12	○			ø1/4	VPMB20S[6]-1/4J	—		
	ø25	ø3	VPMB25S[6]-3J	—		ø25	ø1/8	VPMB25S[6]-1/8J	—		
		ø4	VPMB25S[6]-4J12	○			ø5/32	VPMB25S[6]-5/32J12	○		
		ø6	VPMB25S[6]-6J12	○			ø1/4	VPMB25S[6]-1/4J	—		
	ø30	ø3	VPMB30S[6]-3J	—		ø30	ø1/8	VPMB30S[6]-1/8J	—		
		ø4	VPMB30S[6]-4J12	○			ø5/32	VPMB30S[6]-5/32J12	○		
		ø6	VPMB30S[6]-6J12	○			ø1/4	VPMB30S[6]-1/4J	—		
	ø35	ø3	VPMB35S[6]-3J	—		ø35	ø1/8	VPMB35S[6]-1/8J	—		
		ø4	VPMB35S[6]-4J12	○			ø5/32	VPMB35S[6]-5/32J12	○		
		ø6	VPMB35S[6]-6J12	○			ø1/4	VPMB35S[6]-1/4J	—		
	ø50	ø3	VPMB50S[6]-3J	—		ø50	ø1/8	VPMB50S[6]-1/8J	—		
		ø4	VPMB50S[6]-4J12	○			ø5/32	VPMB50S[6]-5/32J12	○		
		ø6	VPMB50S[6]-6J12	○			ø1/4	VPMB50S[6]-1/4J	—		
Holder type	Pad dia. (mm)	Male thread size	Model code	12 -S3 -S3 spec.	Connection config. code						
Fixed type, Side port, Female thread, Mini VPMB 	ø10	M5×0.8	VPMB10S[6]-M512	○	M6						
	ø15	M5×0.8	VPMB15S[6]-M512	○							
	ø20	M5×0.8	VPMB20S[6]-M512	○							
	ø25	M5×0.8	VPMB25S[6]-M512	○							
	ø30	M5×0.8	VPMB30S[6]-M512	○							
	ø35	M5×0.8	VPMB35S[6]-M512	○							
	ø50	M5×0.8	VPMB50S[6]-M512	○							

Notes
*Barb fitting type holders are also selectable. VPMB holders are also available in Push-in fitting type for tube O.D. of 1.8 mm and 2 mm. Contact us for the details.

CAD data is available at PISCO website.

Packaging specifications 1 pc./bag

Options
12: -S3 ⇒ -S3 spec. (○ in the lists: Available)
*1. For "-S3 spec.", the release ring color is dark blue, and the gasket material is FKM+SUS316.
*2. For inch size push-in fitting, the release ring color is white even for "-S3 spec."

Optional items ⇒ P.677
Fall Prevention Valve
Swivel Joint for vacuum pad
Filter

RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad dia. (mm)	Tube O.D. (mm)	Model code	12 -S3 -S3 spec.	Connection config. code	Pad dia. (mm)	Tube O.D. (inch)	Model code	12 -S3 -S3 spec.	Connection config. code
Fixed type, Side port, Push-in fitting, Standard VPB 	ø10	ø3	VPB10S[6]-3J	—	M6	ø10	ø1/8	VPB10S[6]-1/8J	—	M6
		ø4	VPB10S[6]-4J12	○			ø5/32	VPB10S[6]-5/32J12	○	
		ø6	VPB10S[6]-6J12	○			ø1/4	VPB10S[6]-1/4J	—	
	ø15	ø3	VPB15S[6]-3J	—		ø15	ø1/8	VPB15S[6]-1/8J	—	
		ø4	VPB15S[6]-4J12	○			ø5/32	VPB15S[6]-5/32J12	○	
		ø6	VPB15S[6]-6J12	○			ø1/4	VPB15S[6]-1/4J	—	
	ø20	ø3	VPB20S[6]-3J	—		ø20	ø1/8	VPB20S[6]-1/8J	—	
		ø4	VPB20S[6]-4J12	○			ø5/32	VPB20S[6]-5/32J12	○	
		ø6	VPB20S[6]-6J12	○			ø1/4	VPB20S[6]-1/4J	—	
	ø25	ø3	VPB25S[6]-3J	—		ø25	ø1/8	VPB25S[6]-1/8J	—	
		ø4	VPB25S[6]-4J12	○			ø5/32	VPB25S[6]-5/32J12	○	
		ø6	VPB25S[6]-6J12	○			ø1/4	VPB25S[6]-1/4J	—	
	ø30	ø3	VPB30S[6]-3J	—		ø30	ø1/8	VPB30S[6]-1/8J	—	
		ø4	VPB30S[6]-4J12	○			ø5/32	VPB30S[6]-5/32J12	○	
		ø6	VPB30S[6]-6J12	○			ø1/4	VPB30S[6]-1/4J	—	
	ø35	ø3	VPB35S[6]-3J	—		ø35	ø1/8	VPB35S[6]-1/8J	—	
		ø4	VPB35S[6]-4J12	○			ø5/32	VPB35S[6]-5/32J12	○	
		ø6	VPB35S[6]-6J12	○			ø1/4	VPB35S[6]-1/4J	—	
	ø50	ø3	VPB50S[6]-3J	—		ø50	ø1/8	VPB50S[6]-1/8J	—	
		ø4	VPB50S[6]-4J12	○			ø5/32	VPB50S[6]-5/32J12	○	
		ø6	VPB50S[6]-6J12	○			ø1/4	VPB50S[6]-1/4J	—	
ø70	ø4	VPB70S[6]-4J	—	ø70	ø1/8	VPB70S[6]-1/8J	—			
	ø6	VPB70S[6]-6J	—		ø5/32	VPB70S[6]-5/32J	—			
	ø8	VPB70S[6]-8J	—		ø3/16	VPB70S[6]-3/16J	—			
ø100	ø4	VPB100S[6]-4J	—	ø100	ø1/4	VPB70S[6]-1/4J	—			
	ø6	VPB100S[6]-6J	—		ø5/16	VPB70S[6]-5/16J	—			
	ø8	VPB100S[6]-8J	—		ø1/8	VPB100S[6]-1/8J	—			
ø100						ø5/32	VPB100S[6]-5/32J	—		
						ø3/16	VPB100S[6]-3/16J	—		
						ø1/4	VPB100S[6]-1/4J	—		
						ø5/16	VPB100S[6]-5/16J	—		
						ø1/8	VPB100S[6]-1/8J	—		
						ø5/16	VPB100S[6]-5/16J	—		

Notes
*Barb fitting type holders are also selectable. VPMB holders are also available in Push-in fitting type for tube O.D. of 1.8 mm and 2 mm. Contact us for the details.

CAD data is available at PISCO website.

Packaging specifications 1 pc./bag

Options
12: -S3 ⇒ -S3 spec. (○ in the lists: Available)
*1. For "-S3 spec.", the release ring color is dark blue, and the gasket material is FKM+SUS316.
*2. For inch size fitting, the release ring color is white even for "-S3 spec."

Holder type	Pad dia. (mm)	Male thread size	Model code	12 -S3 spec.	Connection config. code
Fixed type, Side port, Female thread, Standard VPB 	ø10	M6×1	VPB10S-6-M612	○	M6
	ø15	M6×1	VPB15S-6-M612	○	
	ø20	M6×1	VPB20S-6-M612	○	
	ø25	M6×1	VPB25S-6-M612	○	
	ø30	M6×1	VPB30S-6-M612	○	
	ø35	M6×1	VPB35S-6-M612	○	
	ø50	M6×1	VPB50S-6-M612	○	M10
	ø70	G1/8	VPB70S-G112	○	
	ø100	G1/8	VPB100S-G112	○	
	ø70	NPT1/8	VPB70S-N1	—	
	ø100	NPT1/8	VPB100S-N1	—	

Holder type	Pad dia. (mm)	Tube O.D. (mm)	Model code	12 -S3 spec.	Connection config. code	Pad dia. (mm)	Tube O.D. (inch)	Model code	12 -S3 spec.	Connection config. code
Spring type, Top port, Push-in fitting, Mini VPMC 	ø10	ø3	VPMC10-4S-3J	—	M6	ø10	ø1/8	VPMC10-4S-1/8J	—	M6
		ø4	VPMC10-4S-4J12	○			ø5/32	VPMC10-4S-5/32J12	○	
		ø6	VPMC10-4S-6J12	○			ø1/8	VPMC15-4S-1/8J	—	
	ø15	ø3	VPMC15-4S-3J	—		ø15	ø5/32	VPMC15-4S-5/32J12	○	
		ø4	VPMC15-4S-4J12	○			ø1/8	VPMC20-4S-1/8J	—	
		ø6	VPMC15-4S-6J12	○			ø5/32	VPMC20-4S-5/32J12	○	
	ø20	ø3	VPMC20-4S-3J	—		ø20	ø1/8	VPMC25-4S-1/8J	—	
		ø4	VPMC20-4S-4J12	○			ø5/32	VPMC25-4S-5/32J12	○	
		ø6	VPMC20-4S-6J12	○			ø1/8	VPMC30-4S-1/8J	—	
	ø25	ø3	VPMC25-4S-3J	—		ø25	ø5/32	VPMC30-4S-5/32J12	○	
		ø4	VPMC25-4S-4J12	○			ø1/8	VPMC35-4S-1/8J	—	
		ø6	VPMC25-4S-6J12	○			ø5/32	VPMC35-4S-5/32J12	○	
	ø30	ø3	VPMC30-4S-3J	—		ø30	ø1/8	VPMC50-4S-1/8J	—	
		ø4	VPMC30-4S-4J12	○			ø5/32	VPMC50-4S-5/32J12	○	
		ø6	VPMC30-4S-6J12	○			ø1/8	VPMC50-4S-1/8J	—	
	ø35	ø3	VPMC35-4S-3J	—		ø35	ø5/32	VPMC50-4S-5/32J12	○	
		ø4	VPMC35-4S-4J12	○			ø1/8	VPMC50-4S-1/8J	—	
		ø6	VPMC35-4S-6J12	○			ø5/32	VPMC50-4S-5/32J12	○	
	ø50	ø3	VPMC50-4S-3J	—		ø50	ø1/8	VPMC50-4S-1/8J	—	
		ø4	VPMC50-4S-4J12	○			ø5/32	VPMC50-4S-5/32J12	○	

Stroke 4mm

Vacuum Pad Sponge Type

RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad dia. (mm)	Stroke (mm)	Tube O.D. (mm)	Model code	12 -S3 -S3 spec.	Connection config. code	Pad dia. (mm)	Stroke (mm)	Tube O.D. (inch)	Model code	12 -S3 -S3 spec.	Connection config. code						
Spring type, Top port, Push-in fitting, Standard VPC  Pad dia. 	ø10	6	ø3	VPC10-6S[5]-3J[8]	—	M6	ø10	6	ø1/8	VPC10-6S[5]-1/8J[8]	—	M6						
			ø4	VPC10-6S[5]-4J[8]12	○				ø5/32	VPC10-6S[5]-5/32J[8]12	○							
			ø6	VPC10-6S[5]-6J[8]12	○				ø1/4	VPC10-6S[5]-1/4J[8]	—							
		10	ø3	VPC10-10S[5]-3J[8]	—			10	ø1/8	VPC10-10S[5]-1/8J[8]	—							
			ø4	VPC10-10S[5]-4J[8]	—				ø5/32	VPC10-10S[5]-5/32J[8]	—							
			ø6	VPC10-10S[5]-6J[8]	—				ø1/4	VPC10-10S[5]-1/4J[8]	—							
		15	ø3	VPC10-15S[5]-3J[8]	—			15	ø1/8	VPC10-15S[5]-1/8J[8]	—							
			ø4	VPC10-15S[5]-4J[8]	—				ø5/32	VPC10-15S[5]-5/32J[8]	—							
			ø6	VPC10-15S[5]-6J[8]	—				ø1/4	VPC10-15S[5]-1/4J[8]	—							
		20	ø3	VPC10-20S[5]-3J[8]	—			20	ø1/8	VPC10-20S[5]-1/8J[8]	—							
			ø4	VPC10-20S[5]-4J[8]	—				ø5/32	VPC10-20S[5]-5/32J[8]	—							
			ø6	VPC10-20S[5]-6J[8]	—				ø1/4	VPC10-20S[5]-1/4J[8]	—							
	ø15	6	ø3	VPC15-6S[5]-3J[8]	—		M6	ø15	6	ø1/8	VPC15-6S[5]-1/8J[8]		—	M6				
			ø4	VPC15-6S[5]-4J[8]12	○					ø5/32	VPC15-6S[5]-5/32J[8]12		○					
			ø6	VPC15-6S[5]-6J[8]12	○					ø1/4	VPC15-6S[5]-1/4J[8]		—					
		10	ø3	VPC15-10S[5]-3J[8]	—				10	ø1/8	VPC15-10S[5]-1/8J[8]		—					
			ø4	VPC15-10S[5]-4J[8]	—					ø5/32	VPC15-10S[5]-5/32J[8]		—					
			ø6	VPC15-10S[5]-6J[8]	—					ø1/4	VPC15-10S[5]-1/4J[8]		—					
		15	ø3	VPC15-15S[5]-3J[8]	—				15	ø1/8	VPC15-15S[5]-1/8J[8]		—					
			ø4	VPC15-15S[5]-4J[8]	—					ø5/32	VPC15-15S[5]-5/32J[8]		—					
			ø6	VPC15-15S[5]-6J[8]	—					ø1/4	VPC15-15S[5]-1/4J[8]		—					
		20	ø3	VPC15-20S[5]-3J[8]	—				20	ø1/8	VPC15-20S[5]-1/8J[8]		—					
			ø4	VPC15-20S[5]-4J[8]	—					ø5/32	VPC15-20S[5]-5/32J[8]		—					
			ø6	VPC15-20S[5]-6J[8]	—					ø1/4	VPC15-20S[5]-1/4J[8]		—					
	ø20	6	ø3	VPC20-6S[5]-3J[8]	—			M6	ø20	6	ø1/8		VPC20-6S[5]-1/8J[8]		—	M6		
			ø4	VPC20-6S[5]-4J[8]12	○						ø5/32		VPC20-6S[5]-5/32J[8]12		○			
			ø6	VPC20-6S[5]-6J[8]12	○						ø1/4		VPC20-6S[5]-1/4J[8]		—			
		10	ø3	VPC20-10S[5]-3J[8]	—					10	ø1/8		VPC20-10S[5]-1/8J[8]		—			
			ø4	VPC20-10S[5]-4J[8]	—						ø5/32		VPC20-10S[5]-5/32J[8]		—			
			ø6	VPC20-10S[5]-6J[8]	—						ø1/4		VPC20-10S[5]-1/4J[8]		—			
		15	ø3	VPC20-15S[5]-3J[8]	—					15	ø1/8		VPC20-15S[5]-1/8J[8]		—			
			ø4	VPC20-15S[5]-4J[8]	—						ø5/32		VPC20-15S[5]-5/32J[8]		—			
			ø6	VPC20-15S[5]-6J[8]	—						ø1/4		VPC20-15S[5]-1/4J[8]		—			
		20	ø3	VPC20-20S[5]-3J[8]	—					20	ø1/8		VPC20-20S[5]-1/8J[8]		—			
			ø4	VPC20-20S[5]-4J[8]	—						ø5/32		VPC20-20S[5]-5/32J[8]		—			
			ø6	VPC20-20S[5]-6J[8]	—						ø1/4		VPC20-20S[5]-1/4J[8]		—			
	ø25	6	ø3	VPC25-6S[5]-3J[8]	—				M6	ø25	6		ø1/8		VPC25-6S[5]-1/8J[8]		—	M6
			ø4	VPC25-6S[5]-4J[8]12	○								ø5/32		VPC25-6S[5]-5/32J[8]12		○	
			ø6	VPC25-6S[5]-6J[8]12	○								ø1/4		VPC25-6S[5]-1/4J[8]		—	
		10	ø3	VPC25-10S[5]-3J[8]	—						10		ø1/8		VPC25-10S[5]-1/8J[8]		—	
			ø4	VPC25-10S[5]-4J[8]	—								ø5/32		VPC25-10S[5]-5/32J[8]		—	
			ø6	VPC25-10S[5]-6J[8]	—								ø1/4		VPC25-10S[5]-1/4J[8]		—	
		15	ø3	VPC25-15S[5]-3J[8]	—						15		ø1/8		VPC25-15S[5]-1/8J[8]		—	
			ø4	VPC25-15S[5]-4J[8]	—								ø5/32		VPC25-15S[5]-5/32J[8]		—	
			ø6	VPC25-15S[5]-6J[8]	—								ø1/4		VPC25-15S[5]-1/4J[8]		—	
		20	ø3	VPC25-20S[5]-3J[8]	—						20		ø1/8		VPC25-20S[5]-1/8J[8]		—	
			ø4	VPC25-20S[5]-4J[8]	—								ø5/32		VPC25-20S[5]-5/32J[8]		—	
			ø6	VPC25-20S[5]-6J[8]	—								ø1/4		VPC25-20S[5]-1/4J[8]		—	

Notes
*Barb fitting type holders are also selectable.
Contact us for the details.



CAD
CAD data is available
at PISCO website.

Packaging specifications
1 pc./bag

Options
[12]: -DC ⇒ Holder with dust catcher
[12]: -S3 ⇒ -S3 spec. (○ in the lists: Available)
*1. For "-S3 spec.", the release ring color is dark blue, and the gasket material is FKM+SUS316.
*2. For inch size push-in fitting, the release ring color is white even for "-S3 spec."

RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad dia. (mm)	Stroke (mm)	Tube O.D. (mm)	Model code	12 -S3 -S3 spec.	Connection config. code	Pad dia. (mm)	Stroke (mm)	Tube O.D. (inch)	Model code	12 -S3 -S3 spec.	Connection config. code						
Spring type, Top port, Push-in fitting, Standard VPC  Pad dia. 	ø30	6	ø3	VPC30-6S[5]-3J[8]	—	M6	ø30	6	ø1/8	VPC30-6S[5]-1/8J[8]	—	M6						
			ø4	VPC30-6S[5]-4J[8]12	○				ø5/32	VPC30-6S[5]-5/32J[8]12	○							
			ø6	VPC30-6S[5]-6J[8]12	○				ø1/4	VPC30-6S[5]-1/4J[8]	—							
		10	ø3	VPC30-10S[5]-3J[8]	—			10	ø1/8	VPC30-10S[5]-1/8J[8]	—							
			ø4	VPC30-10S[5]-4J[8]	—				ø5/32	VPC30-10S[5]-5/32J[8]	—							
			ø6	VPC30-10S[5]-6J[8]	—				ø1/4	VPC30-10S[5]-1/4J[8]	—							
		15	ø3	VPC30-15S[5]-3J[8]	—			15	ø1/8	VPC30-15S[5]-1/8J[8]	—							
			ø4	VPC30-15S[5]-4J[8]	—				ø5/32	VPC30-15S[5]-5/32J[8]	—							
			ø6	VPC30-15S[5]-6J[8]	—				ø1/4	VPC30-15S[5]-1/4J[8]	—							
		20	ø3	VPC30-20S[5]-3J[8]	—			20	ø1/8	VPC30-20S[5]-1/8J[8]	—							
			ø4	VPC30-20S[5]-4J[8]	—				ø5/32	VPC30-20S[5]-5/32J[8]	—							
			ø6	VPC30-20S[5]-6J[8]	—				ø1/4	VPC30-20S[5]-1/4J[8]	—							
		ø35	6	ø3	VPC35-6S[5]-3J[8]			—	M6	ø35	6		ø1/8	VPC35-6S[5]-1/8J[8]	—	M6		
				ø4	VPC35-6S[5]-4J[8]12			○					ø5/32	VPC35-6S[5]-5/32J[8]12	○			
				ø6	VPC35-6S[5]-6J[8]12			○					ø1/4	VPC35-6S[5]-1/4J[8]	—			
			10	ø3	VPC35-10S[5]-3J[8]			—			10		ø1/8	VPC35-10S[5]-1/8J[8]	—			
				ø4	VPC35-10S[5]-4J[8]			—					ø5/32	VPC35-10S[5]-5/32J[8]	—			
				ø6	VPC35-10S[5]-6J[8]			—					ø1/4	VPC35-10S[5]-1/4J[8]	—			
	15		ø3	VPC35-15S[5]-3J[8]	—	15	ø1/8	VPC35-15S[5]-1/8J[8]			—							
			ø4	VPC35-15S[5]-4J[8]	—		ø5/32	VPC35-15S[5]-5/32J[8]			—							
			ø6	VPC35-15S[5]-6J[8]	—		ø1/4	VPC35-15S[5]-1/4J[8]			—							
	20		ø3	VPC35-20S[5]-3J[8]	—	20	ø1/8	VPC35-20S[5]-1/8J[8]			—							
			ø4	VPC35-20S[5]-4J[8]	—		ø5/32	VPC35-20S[5]-5/32J[8]			—							
			ø6	VPC35-20S[5]-6J[8]	—		ø1/4	VPC35-20S[5]-1/4J[8]			—							
	ø50		6	ø3	VPC50-6S[5]-3J[8]	—	M10	ø50			6	ø1/8	VPC50-6S[5]-1/8J[8]	—	M10			
				ø4	VPC50-6S[5]-4J[8]12	○						ø5/32	VPC50-6S[5]-5/32J[8]12	○				
				ø6	VPC50-6S[5]-6J[8]12	○						ø1/4	VPC50-6S[5]-1/4J[8]	—				
			10	ø3	VPC50-10S[5]-3J[8]	—					10	ø1/8	VPC50-10S[5]-1/8J[8]	—				
				ø4	VPC50-10S[5]-4J[8]	—						ø5/32	VPC50-10S[5]-5/32J[8]	—				
				ø6	VPC50-10S[5]-6J[8]	—						ø1/4	VPC50-10S[5]-1/4J[8]	—				
		15	ø3	VPC50-15S[5]-3J[8]	—	15			ø1/8	VPC50-15S[5]-1/8J[8]	—							
			ø4	VPC50-15S[5]-4J[8]	—				ø5/32	VPC50-15S[5]-5/32J[8]	—							
			ø6	VPC50-15S[5]-6J[8]	—				ø1/4	VPC50-15S[5]-1/4J[8]	—							
		20	ø3	VPC50-20S[5]-3J[8]	—	20			ø1/8	VPC50-20S[5]-1/8J[8]	—							
			ø4	VPC50-20S[5]-4J[8]	—				ø5/32	VPC50-20S[5]-5/32J[8]	—							
			ø6	VPC50-20S[5]-6J[8]	—				ø1/4	VPC50-20S[5]-1/4J[8]	—							
ø70		10	ø4	VPC70-10S[5]-4J[8]	—	M10			ø70	10	ø1/8	VPC70-10S[5]-1/8J[8]	—	M10				
			ø6	VPC70-10S[5]-6J[8]	—						ø5/32	VPC70-10S[5]-5/32J[8]	—					
			ø8	VPC70-10S[5]-8J[8]	—						ø3/16	VPC70-10S[5]-3/16J[8]	—					
			ø4	VPC100-10S[5]-4J[8]	—						ø1/4	VPC70-10S[5]-1/4J[8]	—					
ø100		10	ø6	VPC100-10S[5]-6J[8]	—					M10	ø100	10	ø5/16			VPC70-10S[5]-5/16J[8]	—	M10
			ø8	VPC100-10S[5]-8J[8]	—								ø3/8			VPC70-10S[5]-3/8J[8]	—	
	ø1/8		VPC100-10S[5]-1/8J[8]	—	ø5/32		VPC100-10S[5]-5/32J[8]	—										
	ø3/16		VPC100-10S[5]-3/16J[8]	—	ø1/4		VPC100-10S[5]-1/4J[8]	—										
		ø5/16	VPC100-10S[5]-5/16J[8]	—				ø3/8				VPC100-10S[5]-3/8J[8]	—					
		ø1/4	VPC100-10S[5]-1/4J[8]	—				ø5/16				VPC100-10S[5]-5/16J[8]	—					
		ø3/8	VPC100-10S[5]-3/8J[8]	—				ø1/2				VPC100-10S[5]-1/2J[8]	—					
		ø1/2	VPC100-10S[5]-1/2J[8]	—				ø3/4				VPC100-10S[5]-3/4J[8]	—					

Vacuum Pad Sponge Type

RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad dia. (mm)	Stroke (mm)	Male thread size	Model code	⑫-⑬ -S3 spec.	Connection config. code
Spring type, Top port, Female thread, Standard VPC 	ø10	6	M6×1	VPC10-6S⑥-M6⑧⑫	○	M6
		10		VPC10-10S⑥-M6⑧	—	
		15		VPC10-15S⑥-M6⑧	—	
		20		VPC10-20S⑥-M6⑧	—	
	ø15	6	M6×1	VPC15-6S⑥-M6⑧⑫	○	
		10		VPC15-10S⑥-M6⑧	—	
		15		VPC15-15S⑥-M6⑧	—	
		20		VPC15-20S⑥-M6⑧	—	
	ø20	6	M6×1	VPC20-6S⑥-M6⑧⑫	○	
		10		VPC20-10S⑥-M6⑧	—	
		15		VPC20-15S⑥-M6⑧	—	
		20		VPC20-20S⑥-M6⑧	—	
	ø25	6	M6×1	VPC25-6S⑥-M6⑧⑫	○	
		10		VPC25-10S⑥-M6⑧	—	
		15		VPC25-15S⑥-M6⑧	—	
		20		VPC25-20S⑥-M6⑧	—	
	ø30	6	M6×1	VPC30-6S⑥-M6⑧⑫	○	
		10		VPC30-10S⑥-M6⑧	—	
		15		VPC30-15S⑥-M6⑧	—	
		20		VPC30-20S⑥-M6⑧	—	
	ø35	6	M6×1	VPC35-6S⑥-M6⑧⑫	○	
		10		VPC35-10S⑥-M6⑧	—	
		15		VPC35-15S⑥-M6⑧	—	
		20		VPC35-20S⑥-M6⑧	—	
	ø50	6	M6×1	VPC50-6S⑥-M6⑧⑫	○	
		10		VPC50-10S⑥-M6⑧	—	
		15		VPC50-15S⑥-M6⑧	—	
		20		VPC50-20S⑥-M6⑧	—	
	ø70	10	G1/8	VPC70-10S⑥-G1⑧⑫	○	M10
	ø100	10	G1/8	VPC100-10S⑥-G1⑧⑫	○	
	ø70	10	NPT1/8	VPC70-10S⑥-N1⑧	—	
	ø100	10	NPT1/8	VPC100-10S⑥-N1⑧	—	

Notes
*Barb fitting type holders are also selectable.
Contact us for the details.

CAD
CAD data is available
at PISCO website.

Packaging specifications
1 pc./bag

Options
⑫: -DC ⇒ Holder with dust catcher
⑬: -S3 ⇒ -S3 spec. (○ in the lists: Available)
*1. For "-S3 spec.", the release ring color is dark blue, and the gasket material is FKM+SUS316.
*2. For inch size push-in fitting, the release ring color is white even for "-S3 spec."

Optional items
⇒ P.677

Fail Prevention Valve  Dust Catcher (VPC)  Swivel Joint for vacuum pad  Filter 

RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad dia. (mm)	Stroke (mm)	Tube O.D. (mm)	Model code	Connection config. code	Pad dia. (mm)	Stroke (mm)	Tube O.D. (inch)	Model code	Connection config. code
Spring type, Top port, Push-in fitting, No cover VPOC 	ø10	20	ø3	VPOC10-20S③-3J	M6	ø10	20	ø1/8	VPOC10-20S③-1/8J	M6
			ø4	VPOC10-20S④-4J				ø5/32	VPOC10-20S④-5/32J	
			ø6	VPOC10-20S⑥-6J				ø1/4	VPOC10-20S⑥-1/4J	
		30	ø3	VPOC10-30S③-3J			30	ø1/8	VPOC10-30S③-1/8J	
			ø4	VPOC10-30S④-4J				ø5/32	VPOC10-30S④-5/32J	
			ø6	VPOC10-30S⑥-6J				ø1/4	VPOC10-30S⑥-1/4J	
		40	ø3	VPOC10-40S③-3J			40	ø1/8	VPOC10-40S③-1/8J	
			ø4	VPOC10-40S④-4J				ø5/32	VPOC10-40S④-5/32J	
			ø6	VPOC10-40S⑥-6J				ø1/4	VPOC10-40S⑥-1/4J	
		50	ø3	VPOC10-50S③-3J			50	ø1/8	VPOC10-50S③-1/8J	
			ø4	VPOC10-50S④-4J				ø5/32	VPOC10-50S④-5/32J	
			ø6	VPOC10-50S⑥-6J				ø1/4	VPOC10-50S⑥-1/4J	
	ø15	20	ø3	VPOC15-20S③-3J		ø15	20	ø1/8	VPOC15-20S③-1/8J	
			ø4	VPOC15-20S④-4J				ø5/32	VPOC15-20S④-5/32J	
			ø6	VPOC15-20S⑥-6J				ø1/4	VPOC15-20S⑥-1/4J	
		30	ø3	VPOC15-30S③-3J			30	ø1/8	VPOC15-30S③-1/8J	
			ø4	VPOC15-30S④-4J				ø5/32	VPOC15-30S④-5/32J	
			ø6	VPOC15-30S⑥-6J				ø1/4	VPOC15-30S⑥-1/4J	
		40	ø3	VPOC15-40S③-3J			40	ø1/8	VPOC15-40S③-1/8J	
			ø4	VPOC15-40S④-4J				ø5/32	VPOC15-40S④-5/32J	
			ø6	VPOC15-40S⑥-6J				ø1/4	VPOC15-40S⑥-1/4J	
		50	ø3	VPOC15-50S③-3J			50	ø1/8	VPOC15-50S③-1/8J	
			ø4	VPOC15-50S④-4J				ø5/32	VPOC15-50S④-5/32J	
			ø6	VPOC15-50S⑥-6J				ø1/4	VPOC15-50S⑥-1/4J	
	ø20	20	ø3	VPOC20-20S③-3J		ø20	20	ø1/8	VPOC20-20S③-1/8J	
			ø4	VPOC20-20S④-4J				ø5/32	VPOC20-20S④-5/32J	
			ø6	VPOC20-20S⑥-6J				ø1/4	VPOC20-20S⑥-1/4J	
		30	ø3	VPOC20-30S③-3J			30	ø1/8	VPOC20-30S③-1/8J	
			ø4	VPOC20-30S④-4J				ø5/32	VPOC20-30S④-5/32J	
			ø6	VPOC20-30S⑥-6J				ø1/4	VPOC20-30S⑥-1/4J	
		40	ø3	VPOC20-40S③-3J			40	ø1/8	VPOC20-40S③-1/8J	
			ø4	VPOC20-40S④-4J				ø5/32	VPOC20-40S④-5/32J	
			ø6	VPOC20-40S⑥-6J				ø1/4	VPOC20-40S⑥-1/4J	
		50	ø3	VPOC20-50S③-3J			50	ø1/8	VPOC20-50S③-1/8J	
			ø4	VPOC20-50S④-4J				ø5/32	VPOC20-50S④-5/32J	
			ø6	VPOC20-50S⑥-6J				ø1/4	VPOC20-50S⑥-1/4J	
	ø25	20	ø3	VPOC25-20S③-3J		ø25	20	ø1/8	VPOC25-20S③-1/8J	
			ø4	VPOC25-20S④-4J				ø5/32	VPOC25-20S④-5/32J	
			ø6	VPOC25-20S⑥-6J				ø1/4	VPOC25-20S⑥-1/4J	
		30	ø3	VPOC25-30S③-3J			30	ø1/8	VPOC25-30S③-1/8J	
			ø4	VPOC25-30S④-4J				ø5/32	VPOC25-30S④-5/32J	
			ø6	VPOC25-30S⑥-6J				ø1/4	VPOC25-30S⑥-1/4J	
		40	ø3	VPOC25-40S③-3J			40	ø1/8	VPOC25-40S③-1/8J	
			ø4	VPOC25-40S④-4J				ø5/32	VPOC25-40S④-5/32J	
			ø6	VPOC25-40S⑥-6J				ø1/4	VPOC25-40S⑥-1/4J	
		50	ø3	VPOC25-50S③-3J			50	ø1/8	VPOC25-50S③-1/8J	
			ø4	VPOC25-50S④-4J				ø5/32	VPOC25-50S④-5/32J	
			ø6	VPOC25-50S⑥-6J				ø1/4	VPOC25-50S⑥-1/4J	
	ø30	20	ø3	VPOC30-20S③-3J		ø30	20	ø1/8	VPOC30-20S③-1/8J	
			ø4	VPOC30-20S④-4J				ø5/32	VPOC30-20S④-5/32J	
			ø6	VPOC30-20S⑥-6J				ø1/4	VPOC30-20S⑥-1/4J	
		30	ø3	VPOC30-30S③-3J			30	ø1/8	VPOC30-30S③-1/8J	
			ø4	VPOC30-30S④-4J				ø5/32	VPOC30-30S④-5/32J	
			ø6	VPOC30-30S⑥-6J				ø1/4	VPOC30-30S⑥-1/4J	
		40	ø3	VPOC30-40S③-3J			40	ø1/8	VPOC30-40S③-1/8J	
			ø4	VPOC30-40S④-4J				ø5/32	VPOC30-40S④-5/32J	
			ø6	VPOC30-40S⑥-6J				ø1/4	VPOC30-40S⑥-1/4J	
		50	ø3	VPOC30-50S③-3J			50	ø1/8	VPOC30-50S③-1/8J	
			ø4	VPOC30-50S④-4J				ø5/32	VPOC30-50S④-5/32J	
			ø6	VPOC30-50S⑥-6J				ø1/4	VPOC30-50S⑥-1/4J	
	ø35	20	ø3	VPOC35-20S③-3J		ø35	20	ø1/8	VPOC35-20S③-1/8J	
			ø4	VPOC35-20S④-4J				ø5/32	VPOC35-20S④-5/32J	
			ø6	VPOC35-20S⑥-6J				ø1/4	VPOC35-20S⑥-1/4J	
		30	ø3	VPOC35-30S③-3J			30	ø1/8	VPOC35-30S③-1/8J	
			ø4	VPOC35-30S④-4J				ø5/32	VPOC35-30S④-5/32J	
			ø6	VPOC35-30S⑥-6J				ø1/4	VPOC35-30S⑥-1/4J	
		40	ø3	VPOC35-40S③-3J			40	ø1/8	VPOC35-40S③-1/8J	
			ø4	VPOC35-40S④-4J				ø5/32	VPOC35-40S④-5/32J	
			ø6	VPOC35-40S⑥-6J				ø1/4	VPOC35-40S⑥-1/4J	
		50	ø3	VPOC35-50S③-3J			50	ø1/8	VPOC35-50S③-1/8J	
			ø4	VPOC35-50S④-4J				ø5/32	VPOC35-50S④-5/32J	
			ø6	VPOC35-50S⑥-6J				ø1/4	VPOC35-50S⑥-1/4J	
ø50	20	ø3	VPOC50-20S③-3J	ø50	20	ø1/8	VPOC50-20S③-1/8J			
		ø4	VPOC50-20S④-4J			ø5/32	VPOC50-20S④-5/32J			
		ø6	VPOC50-20S⑥-6J			ø1/4	VPOC50-20S⑥-1/4J			
	30	ø3	VPOC50-30S③-3J		30	ø1/8	VPOC50-30S③-1/8J			
		ø4	VPOC50-30S④-4J			ø5/32	VPOC50-30S④-5/32J			
		ø6	VPOC50-30S⑥-6J			ø1/4	VPOC50-30S⑥-1/4J			
	40	ø3	VPOC50-40S③-3J		40	ø1/8	VPOC50-40S③-1/8J			
		ø4	VPOC50-40S④-4J			ø5/32	VPOC50-40S④-5/32J			
		ø6	VPOC50-40S⑥-6J			ø1/4	VPOC50-40S⑥-1/4J			
	50	ø3	VPOC50-50S③-3J		50	ø1/8	VPOC50-50S③-1/8J			
		ø4	VPOC50-50S④-4J			ø5/32	VPOC50-50S④-5/32J			
		ø6	VPOC50-50S⑥-6J			ø1/4	VPOC50-50S⑥-1/4J			

Vacuum Pad Sponge Type

RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad dia. (mm)	Stroke (mm)	Male thread size	Model code	Connection config. code
Spring type, Top port, Female thread, No cover VPOC 	ø10	20	M6×1	VPOC10-20S- 6 -M6	M6
		30		VPOC10-30S- 6 -M6	
		40		VPOC10-40S- 6 -M6	
		50		VPOC10-50S- 6 -M6	
	ø15	20	M6×1	VPOC15-20S- 6 -M6	
		30		VPOC15-30S- 6 -M6	
		40		VPOC15-40S- 6 -M6	
		50		VPOC15-50S- 6 -M6	
	ø20	20	M6×1	VPOC20-20S- 6 -M6	
		30		VPOC20-30S- 6 -M6	
		40		VPOC20-40S- 6 -M6	
		50		VPOC20-50S- 6 -M6	
	ø25	20	M6×1	VPOC25-20S- 6 -M6	
		30		VPOC25-30S- 6 -M6	
		40		VPOC25-40S- 6 -M6	
		50		VPOC25-50S- 6 -M6	
	ø30	20	M6×1	VPOC30-20S- 6 -M6	
		30		VPOC30-30S- 6 -M6	
		40		VPOC30-40S- 6 -M6	
		50		VPOC30-50S- 6 -M6	
	ø35	20	M6×1	VPOC35-20S- 6 -M6	
		30		VPOC35-30S- 6 -M6	
		40		VPOC35-40S- 6 -M6	
		50		VPOC35-50S- 6 -M6	
	ø50	20	M6×1	VPOC50-20S- 6 -M6	
		30		VPOC50-30S- 6 -M6	
		40		VPOC50-40S- 6 -M6	
		50		VPOC50-50S- 6 -M6	

Notes
*Barb fitting type holders are also selectable.
Contact us for the details.

CAD data is available
at PISCO website.

Packaging specifications
1 pc./bag

Optional items
⇒ P.677

Fall Prevention Valve  Swivel Joint for vacuum pad  Filter 

RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad dia. (mm)	Stroke (mm)	Tube O.D. (mm)	Model code	Connection config. code	Pad dia. (mm)	Stroke (mm)	Tube O.D. (inch)	Model code	Connection config. code		
Spring type, Top port, Push-in fitting, Low dust emission VPLFC 	ø10	5	ø3	VPLFC10-5S-6-3J-8	MS	ø10	5	ø1/8	VPLFC10-5S-6-1/8J-8	MS		
			ø4	VPLFC10-5S-6-4J-8				ø5/32	VPLFC10-5S-6-5/32J-8			
		10	ø6	VPLFC10-5S-6-6J-8			ø1/4	VPLFC10-5S-6-1/4J-8	10		ø1/8	VPLFC10-10S-6-1/8J-8
			ø4	VPLFC10-10S-6-4J-8			ø5/32	VPLFC10-10S-6-5/32J-8				
		15	ø6	VPLFC10-10S-6-6J-8			ø1/4	VPLFC10-10S-6-1/4J-8	15		ø1/8	VPLFC10-15S-6-1/8J-8
			ø4	VPLFC10-15S-6-4J-8			ø5/32	VPLFC10-15S-6-5/32J-8				
	ø15	20	ø6	VPLFC10-15S-6-6J-8		ø15	20	ø1/4	VPLFC10-15S-6-1/4J-8			
			ø4	VPLFC10-20S-6-4J-8				ø5/32	VPLFC10-20S-6-5/32J-8			
		5	ø6	VPLFC15-5S-6-6J-8			5	ø1/8	VPLFC15-5S-6-1/8J-8			
			ø4	VPLFC15-5S-6-4J-8				ø5/32	VPLFC15-5S-6-5/32J-8			
		10	ø6	VPLFC15-5S-6-6J-8			10	ø1/4	VPLFC15-5S-6-1/4J-8			
			ø4	VPLFC15-10S-6-4J-8				ø5/32	VPLFC15-10S-6-5/32J-8			
ø20	ø20	15	ø6	VPLFC15-10S-6-6J-8	ø20	15	ø1/4	VPLFC15-10S-6-1/4J-8				
			ø4	VPLFC15-15S-6-4J-8			ø5/32	VPLFC15-15S-6-5/32J-8				
		20	ø6	VPLFC15-15S-6-6J-8		20	ø1/8	VPLFC15-15S-6-1/8J-8				
			ø4	VPLFC15-20S-6-4J-8			ø5/32	VPLFC15-20S-6-5/32J-8				
		5	ø6	VPLFC20-5S-6-6J-8		5	ø1/4	VPLFC15-20S-6-1/4J-8				
			ø4	VPLFC20-5S-6-4J-8			ø5/32	VPLFC20-5S-6-5/32J-8				
	ø25	10	ø6	VPLFC20-5S-6-6J-8	ø25	10	ø1/8	VPLFC20-5S-6-1/8J-8				
			ø4	VPLFC20-10S-6-4J-8			ø5/32	VPLFC20-10S-6-5/32J-8				
		15	ø6	VPLFC20-10S-6-6J-8		15	ø1/4	VPLFC20-10S-6-1/4J-8				
			ø4	VPLFC20-15S-6-4J-8			ø5/32	VPLFC20-15S-6-5/32J-8				
		20	ø6	VPLFC20-15S-6-6J-8		20	ø1/8	VPLFC20-15S-6-1/8J-8				
			ø4	VPLFC20-20S-6-4J-8			ø5/32	VPLFC20-20S-6-5/32J-8				
ø30	ø30	5	ø6	VPLFC20-20S-6-6J-8	ø30	5	ø1/4	VPLFC20-20S-6-1/4J-8				
			ø4	VPLFC25-5S-6-4J-8			ø5/32	VPLFC25-5S-6-5/32J-8				
		10	ø6	VPLFC25-5S-6-6J-8		10	ø1/8	VPLFC25-5S-6-1/8J-8				
			ø4	VPLFC25-5S-6-4J-8			ø5/32	VPLFC25-5S-6-5/32J-8				
		15	ø6	VPLFC25-10S-6-6J-8		15	ø1/4	VPLFC25-5S-6-1/4J-8				
			ø4	VPLFC25-10S-6-4J-8			ø5/32	VPLFC25-10S-6-5/32J-8				
	ø35	20	ø6	VPLFC25-10S-6-6J-8	ø35	20	ø1/8	VPLFC25-10S-6-1/8J-8				
			ø4	VPLFC25-15S-6-4J-8			ø5/32	VPLFC25-15S-6-5/32J-8				
		5	ø6	VPLFC25-15S-6-6J-8		5	ø1/4	VPLFC25-15S-6-1/4J-8				
			ø4	VPLFC25-20S-6-4J-8			ø5/32	VPLFC25-20S-6-5/32J-8				
		10	ø6	VPLFC25-20S-6-6J-8		10	ø1/8	VPLFC25-20S-6-1/8J-8				
			ø4	VPLFC30-5S-6-4J-8			ø5/32	VPLFC30-5S-6-5/32J-8				
ø50	ø30	5	ø6	VPLFC30-5S-6-6J-8	ø30	5	ø1/4	VPLFC30-5S-6-1/4J-8				
			ø4	VPLFC30-10S-6-4J-8			ø5/32	VPLFC30-10S-6-5/32J-8				
		10	ø6	VPLFC30-10S-6-6J-8		10	ø1/8	VPLFC30-10S-6-1/8J-8				
			ø4	VPLFC30-15S-6-4J-8			ø5/32	VPLFC30-15S-6-5/32J-8				
		15	ø6	VPLFC30-15S-6-6J-8		15	ø1/4	VPLFC30-15S-6-1/4J-8				
			ø4	VPLFC30-20S-6-4J-8			ø5/32	VPLFC30-20S-6-5/32J-8				
	ø35	20	ø6	VPLFC30-20S-6-6J-8	ø35	20	ø1/8	VPLFC30-20S-6-1/8J-8				
			ø4	VPLFC35-5S-6-4J-8			ø5/32	VPLFC35-5S-6-5/32J-8				
		5	ø6	VPLFC35-5S-6-6J-8		5	ø1/4	VPLFC35-5S-6-1/4J-8				
			ø4	VPLFC35-10S-6-4J-8			ø5/32	VPLFC35-10S-6-5/32J-8				
		10	ø6	VPLFC35-10S-6-6J-8		10	ø1/8	VPLFC35-10S-6-1/8J-8				
			ø4	VPLFC35-15S-6-4J-8			ø5/32	VPLFC35-15S-6-5/32J-8				
ø50	15	ø6	VPLFC35-15S-6-6J-8	ø50	15	ø1/4	VPLFC35-15S-6-1/4J-8					
		ø4	VPLFC35-20S-6-4J-8			ø5/32	VPLFC35-20S-6-5/32J-8					
	20	ø6	VPLFC35-20S-6-6J-8		20	ø1/8	VPLFC35-20S-6-1/8J-8					
		ø4	VPLFC50-5S-6-4J-8			ø5/32	VPLFC50-5S-6-5/32J-8					
	5	ø6	VPLFC50-5S-6-6J-8		5	ø1/4	VPLFC50-5S-6-1/4J-8					
		ø4	VPLFC50-10S-6-4J-8			ø5/32	VPLFC50-10S-6-5/32J-8					
ø50	10	ø6	VPLFC50-10S-6-6J-8	ø50	10	ø1/8	VPLFC50-10S-6-1/8J-8					
		ø4	VPLFC50-15S-6-4J-8			ø5/32	VPLFC50-15S-6-5/32J-8					
	15	ø6	VPLFC50-15S-6-6J-8		15	ø1/4	VPLFC50-15S-6-1/4J-8					
		ø4	VPLFC50-20S-6-4J-8			ø5/32	VPLFC50-20S-6-5/32J-8					
	20	ø6	VPLFC50-20S-6-6J-8		20	ø1/8	VPLFC50-20S-6-1/8J-8					
		ø4	VPLFC50-25S-6-4J-8			ø5/32	VPLFC50-25S-6-5/32J-8					

Vacuum Pad Sponge Type

RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad dia. (mm)	Stroke (mm)	Male thread size	Model code	Connection config. code
Spring type, Top port, Female thread, Low dust emission VPLFC 	ø10	5	M6x1	VPLFC10-5S- S -M6	
		10	M6x1	VPLFC10-10S- S -M6	
		15	M6x1	VPLFC10-15S- S -M6	
		20	M6x1	VPLFC10-20S- S -M6	
	ø15	5	M6x1	VPLFC15-5S- S -M6	
		10	M6x1	VPLFC15-10S- S -M6	
		15	M6x1	VPLFC15-15S- S -M6	
		20	M6x1	VPLFC15-20S- S -M6	
	ø20	5	M6x1	VPLFC20-5S- S -M6	
		10	M6x1	VPLFC20-10S- S -M6	
		15	M6x1	VPLFC20-15S- S -M6	
		20	M6x1	VPLFC20-20S- S -M6	
	ø25	5	M6x1	VPLFC25-5S- S -M6	
		10	M6x1	VPLFC25-10S- S -M6	
		15	M6x1	VPLFC25-15S- S -M6	
		20	M6x1	VPLFC25-20S- S -M6	
	ø30	5	M6x1	VPLFC30-5S- S -M6	
		10	M6x1	VPLFC30-10S- S -M6	
		15	M6x1	VPLFC30-15S- S -M6	
		20	M6x1	VPLFC30-20S- S -M6	
	ø35	5	M6x1	VPLFC35-5S- S -M6	
		10	M6x1	VPLFC35-10S- S -M6	
		15	M6x1	VPLFC35-15S- S -M6	
		20	M6x1	VPLFC35-20S- S -M6	
	ø50	5	M6x1	VPLFC50-5S- S -M6	
		10	M6x1	VPLFC50-10S- S -M6	
		15	M6x1	VPLFC50-15S- S -M6	
		20	M6x1	VPLFC50-20S- S -M6	

Notes
*Barb fitting type holders are also selectable.
Contact us for the details.

Packaging specifications
1 pc./bag

Options
⑧: -SF1/4 ⇒ Spring load 1/4

Optional items
⇒ P.677

Fall Prevention Valve  Swivel Joint for vacuum pad  Filter 



RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad dia. (mm)	Tube O.D. (mm)	Model code	⑫ -S3 -S3 spec.	Connection config. code	Pad dia. (mm)	Tube O.D. (inch)	Model code	⑫ -S3 -S3 spec.	Connection config. code	
Spring type, Side port, Push-in fitting, Mini VPMD 	ø10	ø3	VPMD10-4S-⑥-3J	—		ø10	ø1/8	VPMD10-4S-⑥-1/8J	—		
		ø4	VPMD10-4S-⑥-4J	○			ø5/32	VPMD10-4S-⑥-5/32J	○		
		ø6	VPMD10-4S-⑥-6J	○			ø1/4	VPMD10-4S-⑥-1/4J	—		
	ø15	ø3	VPMD15-4S-⑥-3J	—		ø15	ø1/8	VPMD15-4S-⑥-1/8J	—		
		ø4	VPMD15-4S-⑥-4J	○			ø5/32	VPMD15-4S-⑥-5/32J	○		
		ø6	VPMD15-4S-⑥-6J	○			ø1/4	VPMD15-4S-⑥-1/4J	—		
	ø20	ø3	VPMD20-4S-⑥-3J	—		ø20	ø1/8	VPMD20-4S-⑥-1/8J	—		
		ø4	VPMD20-4S-⑥-4J	○			ø5/32	VPMD20-4S-⑥-5/32J	○		
		ø6	VPMD20-4S-⑥-6J	○			ø1/4	VPMD20-4S-⑥-1/4J	—		
	ø25	ø3	VPMD25-4S-⑥-3J	—		MG	ø25	ø1/8	VPMD25-4S-⑥-1/8J		—
		ø4	VPMD25-4S-⑥-4J	○				ø5/32	VPMD25-4S-⑥-5/32J		○
		ø6	VPMD25-4S-⑥-6J	○				ø1/4	VPMD25-4S-⑥-1/4J		—
	ø30	ø3	VPMD30-4S-⑥-3J	—		ø30	ø1/8	VPMD30-4S-⑥-1/8J	—		
		ø4	VPMD30-4S-⑥-4J	○			ø5/32	VPMD30-4S-⑥-5/32J	○		
		ø6	VPMD30-4S-⑥-6J	○			ø1/4	VPMD30-4S-⑥-1/4J	—		
	ø35	ø3	VPMD35-4S-⑥-3J	—		ø35	ø1/8	VPMD35-4S-⑥-1/8J	—		
		ø4	VPMD35-4S-⑥-4J	○			ø5/32	VPMD35-4S-⑥-5/32J	○		
		ø6	VPMD35-4S-⑥-6J	○			ø1/4	VPMD35-4S-⑥-1/4J	—		
	ø50	ø3	VPMD50-4S-⑥-3J	—		ø50	ø1/8	VPMD50-4S-⑥-1/8J	—		
		ø4	VPMD50-4S-⑥-4J	○			ø5/32	VPMD50-4S-⑥-5/32J	○		
		ø6	VPMD50-4S-⑥-6J	○			ø1/4	VPMD50-4S-⑥-1/4J	—		
Holder type	Pad dia. (mm)	Male thread size	Model code	⑫ -S3 -S3 spec.	Connection config. code						
Spring type, Side port, Female thread, Mini VPMD 	ø10	M5x0.8	VPMD10-4S-⑥-M5	○	MG						
	ø15	M5x0.8	VPMD15-4S-⑥-M5	○							
	ø20	M5x0.8	VPMD20-4S-⑥-M5	○							
	ø25	M5x0.8	VPMD25-4S-⑥-M5	○							
	ø30	M5x0.8	VPMD30-4S-⑥-M5	○							
	ø35	M5x0.8	VPMD35-4S-⑥-M5	○							
	ø50	M5x0.8	VPMD50-4S-⑥-M5	○							
Stroke 4mm											

Notes
*Barb fitting type holders are also selectable. VPMD holders are also available in Push-in fitting type for tube O.D. of 1.8 mm and 2 mm. Contact us for the details.

CAD
data is available
at PISCO website.

Packaging specifications
1 pc./bag

Options
⑫: -S3 ⇒ -S3 spec. (○ in the lists: Available)
*1. For "-S3 spec.", the release ring color is dark blue, and the gasket material is FKM+SUS316.
*2. For inch size push-in fitting, the release ring color is white even for "-S3 spec."

Optional items
⇒ P.677

Fall Prevention Valve  Swivel Joint for vacuum pad  Filter 



Vacuum Pad Sponge Type

RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad dia. (mm)	Stroke (mm)	Tube O.D. (mm)	Model code	12 -S3 -S3 spec.	Connection config. code	Pad dia. (mm)	Stroke (mm)	Tube O.D. (inch)	Model code	12 -S3 -S3 spec.	Connection config. code		
Spring type, Side port, Push-in fitting, Standard VPD 	ø10	6	ø3	VPD10-6S[6]-3J[8]	—	M6	ø10	6	ø1/8	VPD10-6S[6]-1/8J[8]	—	M6		
			ø4	VPD10-6S[6]-4J[8]	○				ø5/32	VPD10-6S[6]-5/32J[8]	○			
			ø6	VPD10-6S[6]-6J[8]	○				ø1/4	VPD10-6S[6]-1/4J[8]	—			
		10	ø3	VPD10-10S[6]-3J[8]	—			10	ø1/8	VPD10-10S[6]-1/8J[8]	—			
			ø4	VPD10-10S[6]-4J[8]	—				ø5/32	VPD10-10S[6]-5/32J[8]	—			
			ø6	VPD10-10S[6]-6J[8]	—				ø1/4	VPD10-10S[6]-1/4J[8]	—			
		15	ø3	VPD10-15S[6]-3J[8]	—			15	ø1/8	VPD10-15S[6]-1/8J[8]	—			
			ø4	VPD10-15S[6]-4J[8]	—				ø5/32	VPD10-15S[6]-5/32J[8]	—			
			ø6	VPD10-15S[6]-6J[8]	—				ø1/4	VPD10-15S[6]-1/4J[8]	—			
		20	ø3	VPD10-20S[6]-3J[8]	—			20	ø1/8	VPD10-20S[6]-1/8J[8]	—			
			ø4	VPD10-20S[6]-4J[8]	—				ø5/32	VPD10-20S[6]-5/32J[8]	—			
			ø6	VPD10-20S[6]-6J[8]	—				ø1/4	VPD10-20S[6]-1/4J[8]	—			
	ø15	6	ø3	VPD15-6S[6]-3J[8]	—		M6	6	ø1/8	VPD15-6S[6]-1/8J[8]	—	M6		
			ø4	VPD15-6S[6]-4J[8]	○				ø5/32	VPD15-6S[6]-5/32J[8]	○			
			ø6	VPD15-6S[6]-6J[8]	○				ø1/4	VPD15-6S[6]-1/4J[8]	—			
		10	ø3	VPD15-10S[6]-3J[8]	—			10	ø1/8	VPD15-10S[6]-1/8J[8]	—			
			ø4	VPD15-10S[6]-4J[8]	—				ø5/32	VPD15-10S[6]-5/32J[8]	—			
			ø6	VPD15-10S[6]-6J[8]	—				ø1/4	VPD15-10S[6]-1/4J[8]	—			
		15	ø3	VPD15-15S[6]-3J[8]	—			15	ø1/8	VPD15-15S[6]-1/8J[8]	—			
			ø4	VPD15-15S[6]-4J[8]	—				ø5/32	VPD15-15S[6]-5/32J[8]	—			
			ø6	VPD15-15S[6]-6J[8]	—				ø1/4	VPD15-15S[6]-1/4J[8]	—			
		20	ø3	VPD15-20S[6]-3J[8]	—			20	ø1/8	VPD15-20S[6]-1/8J[8]	—			
			ø4	VPD15-20S[6]-4J[8]	—				ø5/32	VPD15-20S[6]-5/32J[8]	—			
			ø6	VPD15-20S[6]-6J[8]	—				ø1/4	VPD15-20S[6]-1/4J[8]	—			
	ø20	6	ø3	VPD20-6S[6]-3J[8]	—			M6	6	ø1/8	VPD20-6S[6]-1/8J[8]	—	M6	
			ø4	VPD20-6S[6]-4J[8]	○					ø5/32	VPD20-6S[6]-5/32J[8]	○		
			ø6	VPD20-6S[6]-6J[8]	○					ø1/4	VPD20-6S[6]-1/4J[8]	—		
		10	ø3	VPD20-10S[6]-3J[8]	—				10	ø1/8	VPD20-10S[6]-1/8J[8]	—		
			ø4	VPD20-10S[6]-4J[8]	—					ø5/32	VPD20-10S[6]-5/32J[8]	—		
			ø6	VPD20-10S[6]-6J[8]	—					ø1/4	VPD20-10S[6]-1/4J[8]	—		
		15	ø3	VPD20-15S[6]-3J[8]	—				15	ø1/8	VPD20-15S[6]-1/8J[8]	—		
			ø4	VPD20-15S[6]-4J[8]	—					ø5/32	VPD20-15S[6]-5/32J[8]	—		
			ø6	VPD20-15S[6]-6J[8]	—					ø1/4	VPD20-15S[6]-1/4J[8]	—		
		20	ø3	VPD20-20S[6]-3J[8]	—				20	ø1/8	VPD20-20S[6]-1/8J[8]	—		
			ø4	VPD20-20S[6]-4J[8]	—					ø5/32	VPD20-20S[6]-5/32J[8]	—		
			ø6	VPD20-20S[6]-6J[8]	—					ø1/4	VPD20-20S[6]-1/4J[8]	—		
	ø25	6	ø3	VPD25-6S[6]-3J[8]	—				M6	6	ø1/8	VPD25-6S[6]-1/8J[8]	—	M6
			ø4	VPD25-6S[6]-4J[8]	○						ø5/32	VPD25-6S[6]-5/32J[8]	○	
			ø6	VPD25-6S[6]-6J[8]	○						ø1/4	VPD25-6S[6]-1/4J[8]	—	
		10	ø3	VPD25-10S[6]-3J[8]	—					10	ø1/8	VPD25-10S[6]-1/8J[8]	—	
			ø4	VPD25-10S[6]-4J[8]	—						ø5/32	VPD25-10S[6]-5/32J[8]	—	
			ø6	VPD25-10S[6]-6J[8]	—						ø1/4	VPD25-10S[6]-1/4J[8]	—	
		15	ø3	VPD25-15S[6]-3J[8]	—					15	ø1/8	VPD25-15S[6]-1/8J[8]	—	
			ø4	VPD25-15S[6]-4J[8]	—						ø5/32	VPD25-15S[6]-5/32J[8]	—	
			ø6	VPD25-15S[6]-6J[8]	—						ø1/4	VPD25-15S[6]-1/4J[8]	—	
		20	ø3	VPD25-20S[6]-3J[8]	—					20	ø1/8	VPD25-20S[6]-1/8J[8]	—	
			ø4	VPD25-20S[6]-4J[8]	—						ø5/32	VPD25-20S[6]-5/32J[8]	—	
			ø6	VPD25-20S[6]-6J[8]	—						ø1/4	VPD25-20S[6]-1/4J[8]	—	

Notes
*Barb fitting type holders are also selectable. Contact us for the details.



Options
[DC] → Holder with dust catcher
[12] → -S3 → -S3 spec. (○ in the lists: Available)
*1. For "-S3 spec.", the release ring color is dark blue, and the gasket material is FKM+SUS316.
*2. For inch size push-in fitting, the release ring color is white even for "-S3 spec."

CAD data is available at PISCO website.

Packaging specifications
1 pc./bag



RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad dia. (mm)	Stroke (mm)	Tube O.D. (mm)	Model code	12 -S3 -S3 spec.	Connection config. code	Pad dia. (mm)	Stroke (mm)	Tube O.D. (inch)	Model code	12 -S3 -S3 spec.	Connection config. code
Spring type, Side port, Push-in fitting, Standard VPD 	ø30	6	ø3	VPD30-6S[6]-3J[8]	—	M6	ø30	6	ø1/8	VPD30-6S[6]-1/8J[8]	—	M6
			ø4	VPD30-6S[6]-4J[8]	○				ø5/32	VPD30-6S[6]-5/32J[8]	○	
			ø6	VPD30-6S[6]-6J[8]	○				ø1/4	VPD30-6S[6]-1/4J[8]	—	
		10	ø3	VPD30-10S[6]-3J[8]	—			10	ø1/8	VPD30-10S[6]-1/8J[8]	—	
			ø4	VPD30-10S[6]-4J[8]	—				ø5/32	VPD30-10S[6]-5/32J[8]	—	
			ø6	VPD30-10S[6]-6J[8]	—				ø1/4	VPD30-10S[6]-1/4J[8]	—	
		15	ø3	VPD30-15S[6]-3J[8]	—			15	ø1/8	VPD30-15S[6]-1/8J[8]	—	
			ø4	VPD30-15S[6]-4J[8]	—				ø5/32	VPD30-15S[6]-5/32J[8]	—	
			ø6	VPD30-15S[6]-6J[8]	—				ø1/4	VPD30-15S[6]-1/4J[8]	—	
		20	ø3	VPD30-20S[6]-3J[8]	—			20	ø1/8	VPD30-20S[6]-1/8J[8]	—	
			ø4	VPD30-20S[6]-4J[8]	—				ø5/32	VPD30-20S[6]-5/32J[8]	—	
			ø6	VPD30-20S[6]-6J[8]	—				ø1/4	VPD30-20S[6]-1/4J[8]	—	
	ø35	6	ø3	VPD35-6S[6]-3J[8]	—	M6		6	ø1/8	VPD35-6S[6]-1/8J[8]	—	M6
			ø4	VPD35-6S[6]-4J[8]	○				ø5/32	VPD35-6S[6]-5/32J[8]	○	
			ø6	VPD35-6S[6]-6J[8]	○				ø1/4	VPD35-6S[6]-1/4J[8]	—	
		10	ø3	VPD35-10S[6]-3J[8]	—			10	ø1/8	VPD35-10S[6]-1/8J[8]	—	
			ø4	VPD35-10S[6]-4J[8]	—				ø5/32	VPD35-10S[6]-5/32J[8]	—	
			ø6	VPD35-10S[6]-6J[8]	—				ø1/4	VPD35-10S[6]-1/4J[8]	—	
		15	ø3	VPD35-15S[6]-3J[8]	—			15	ø1/8	VPD35-15S[6]-1/8J[8]	—	
			ø4	VPD35-15S[6]-4J[8]	—				ø5/32	VPD35-15S[6]-5/32J[8]	—	
			ø6	VPD35-15S[6]-6J[8]	—				ø1/4	VPD35-15S[6]-1/4J[8]	—	
		20	ø3	VPD35-20S[6]-3J[8]	—			20	ø1/8	VPD35-20S[6]-1/8J[8]	—	
			ø4	VPD35-20S[6]-4J[8]	—				ø5/32	VPD35-20S[6]-5/32J[8]	—	
			ø6	VPD35-20S[6]-6J[8]	—				ø1/4	VPD35-20S[6]-1/4J[8]	—	
	ø50	6	ø3	VPD50-6S[6]-3J[8]	—	M10		6	ø1/8	VPD50-6S[6]-1/8J[8]	—	M10
			ø4	VPD50-6S[6]-4J[8]	○				ø5/32	VPD50-6S[6]-5/32J[8]	○	
			ø6	VPD50-6S[6]-6J[8]	○				ø1/4	VPD50-6S[6]-1/4J[8]	—	
		10	ø3	VPD50-10S[6]-3J[8]	—			10	ø1/8	VPD50-10S[6]-1/8J[8]	—	
			ø4	VPD50-10S[6]-4J[8]	—				ø5/32	VPD50-10S[6]-5/32J[8]	—	
			ø6	VPD50-10S[6]-6J[8]	—				ø1/4	VPD50-10S[6]-1/4J[8]	—	
		15	ø3	VPD50-15S[6]-3J[8]	—			15	ø1/8	VPD50-15S[6]-1/8J[8]	—	
			ø4	VPD50-15S[6]-4J[8]	—		ø5/32		VPD50-15S[6]-5/32J[8]	—		
ø6			VPD50-15S[6]-6J[8]	—	ø1/4		VPD50-15S[6]-1/4J[8]		—			
20		ø3	VPD50-20S[6]-3J[8]	—	20		ø1/8	VPD50-20S[6]-1/8J[8]	—			
		ø4	VPD50-20S[6]-4J[8]	—			ø5/32	VPD50-20S[6]-5/32J[8]	—			
		ø6	VPD50-20S[6]-6J[8]	—			ø1/4	VPD50-20S[6]-1/4J[8]	—			
ø70	10	ø4	VPD70-10S[6]-4J[8]	—	M10	ø70	10	ø1/8	VPD70-10S[6]-1/8J[8]	—	M10	
		ø6	VPD70-10S[6]-6J[8]	—				ø5/32	VPD70-10S[6]-5/32J[8]	—		
		ø8	VPD70-10S[6]-8J[8]	—				ø3/16	VPD70-10S[6]-3/16J[8]	—		
ø100	10	ø4	VPD100-10S[6]-4J[8]	—		ø100	10	ø1/4	VPD70-10S[6]-1/4J[8]	—		M10
		ø6	VPD100-10S[6]-6J[8]	—				ø5/16	VPD70-10S[6]-5/16J[8]	—		
		ø8	VPD100-10S[6]-8J[8]	—				ø3/8	VPD70-10S[6]-3/8J[8]	—		
ø100	10	ø1/8	VPD100-10S[6]-1/8J[8]	—		ø100	10	ø1/8	VPD100-10S[6]-1/8J[8]	—		M10
		ø5/32	VPD100-10S[6]-5/32J[8]	—				ø5/32	VPD100-10S[6]-5/32J[8]	—		
		ø3/16	VPD100-10S[6]-3/16J[8]	—				ø3/16	VPD100-10S[6]-3/16J[8]	—		
		ø1/4	VPD100-10S[6]-1/4J[8]	—				ø1/4	VPD100-10S[6]-1/4J[8]	—		
ø100	10	ø5/16	VPD100-10S[6]-5/16J[8]	—		ø100	10	ø5/16	VPD100-10S[6]-5/16J[8]	—		M10
		ø3/8	VPD100-10S[6]-3/8J[8]	—				ø3/8	VPD100-10S[6]-3/8J[8]	—		

Vacuum Pad Sponge Type

RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad dia. (mm)	Stroke (mm)	Male thread size	Model code	⑫-⑬ -S3 spec.	Connection config. code
Spring type, Side port, Female thread, Standard VPD 	ø10	6	M6x1	VPD10-6S⑥-M6⑧⑫	○	M6
		10		VPD10-10S⑥-M6⑧	—	
		15		VPD10-15S⑥-M6⑧	—	
		20		VPD10-20S⑥-M6⑧	—	
	ø15	6	M6x1	VPD15-6S⑥-M6⑧⑫	○	
		10		VPD15-10S⑥-M6⑧	—	
		15		VPD15-15S⑥-M6⑧	—	
		20		VPD15-20S⑥-M6⑧	—	
	ø20	6	M6x1	VPD20-6S⑥-M6⑧⑫	○	
		10		VPD20-10S⑥-M6⑧	—	
		15		VPD20-15S⑥-M6⑧	—	
		20		VPD20-20S⑥-M6⑧	—	
	ø25	6	M6x1	VPD25-6S⑥-M6⑧⑫	○	
		10		VPD25-10S⑥-M6⑧	—	
		15		VPD25-15S⑥-M6⑧	—	
		20		VPD25-20S⑥-M6⑧	—	
	ø30	6	M6x1	VPD30-6S⑥-M6⑧⑫	○	
		10		VPD30-10S⑥-M6⑧	—	
		15		VPD30-15S⑥-M6⑧	—	
		20		VPD30-20S⑥-M6⑧	—	
	ø35	6	M6x1	VPD35-6S⑥-M6⑧⑫	○	
		10		VPD35-10S⑥-M6⑧	—	
		15		VPD35-15S⑥-M6⑧	—	
		20		VPD35-20S⑥-M6⑧	—	
	ø50	6	M6x1	VPD50-6S⑥-M6⑧⑫	○	
		10		VPD50-10S⑥-M6⑧	—	
		15		VPD50-15S⑥-M6⑧	—	
		20		VPD50-20S⑥-M6⑧	—	
	ø70	10	G1/8	VPD70-10S⑥-G1⑧⑫	○	M10
	ø100	10	G1/8	VPD100-10S⑥-G1⑧⑫	○	
	ø70	10	NPT1/8	VPD70-10S⑥-N1⑧	—	
	ø100	10	NPT1/8	VPD100-10S⑥-N1⑧	—	

Notes
*Barb fitting type holders are also selectable. Contact us for the details.

CAD
data is available
at PISCO website.

Packaging specifications
1 pc./bag

Options
⑧: -DC ⇒ Holder with dust catcher
⑫: -S3 ⇒ -S3 spec. (○ in the lists: Available)
*1. For "-S3 spec.", the release ring color is dark blue, and the gasket material is FKM+SUS316.
*2. For inch size push-in fitting, the release ring color is white even for "-S3 spec."

Optional items
⇒ P.677

 Fall Prevention Valve

 Dust Catcher (VPD)

 Swivel Joint for vacuum pad

 Filter

Notes
*Barb fitting type holders are also selectable. Contact us for the details.

CAD
data is available
at PISCO website.

Packaging specifications
1 pc./1 bag

Optional items
⇒ P.677

 Fall Prevention Valve

 Swivel Joint for vacuum pad

 Filter

RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad dia. (mm)	Stroke (mm)	Tube O.D. (mm)	Model code	Connection config. code	Pad dia. (mm)	Stroke (mm)	Tube O.D. (inch)	Model code	Connection config. code
Spring type, Side port, Push-in fitting, No cover VPOD 	ø10	20	ø3	VPOD10-20S③-3J	MB	ø10	20	ø1/8	VPOD10-20S③-1/8J	MB
			ø4	VPOD10-20S③-4J				ø5/32	VPOD10-20S③-5/32J	
			ø6	VPOD10-20S③-6J				ø1/4	VPOD10-20S③-1/4J	
		30	ø3	VPOD10-30S③-3J			30	ø1/8	VPOD10-30S③-1/8J	
			ø4	VPOD10-30S③-4J				ø5/32	VPOD10-30S③-5/32J	
			ø6	VPOD10-30S③-6J				ø1/4	VPOD10-30S③-1/4J	
		40	ø3	VPOD10-40S③-3J			40	ø1/8	VPOD10-40S③-1/8J	
			ø4	VPOD10-40S③-4J				ø5/32	VPOD10-40S③-5/32J	
			ø6	VPOD10-40S③-6J				ø1/4	VPOD10-40S③-1/4J	
		50	ø3	VPOD10-50S③-3J			50	ø1/8	VPOD10-50S③-1/8J	
			ø4	VPOD10-50S③-4J				ø5/32	VPOD10-50S③-5/32J	
			ø6	VPOD10-50S③-6J				ø1/4	VPOD10-50S③-1/4J	
	ø15	20	ø3	VPOD15-20S③-3J		ø15	20	ø1/8	VPOD15-20S③-1/8J	
			ø4	VPOD15-20S③-4J				ø5/32	VPOD15-20S③-5/32J	
			ø6	VPOD15-20S③-6J				ø1/4	VPOD15-20S③-1/4J	
		30	ø3	VPOD15-30S③-3J			30	ø1/8	VPOD15-30S③-1/8J	
			ø4	VPOD15-30S③-4J				ø5/32	VPOD15-30S③-5/32J	
			ø6	VPOD15-30S③-6J				ø1/4	VPOD15-30S③-1/4J	
		40	ø3	VPOD15-40S③-3J			40	ø1/8	VPOD15-40S③-1/8J	
			ø4	VPOD15-40S③-4J				ø5/32	VPOD15-40S③-5/32J	
			ø6	VPOD15-40S③-6J				ø1/4	VPOD15-40S③-1/4J	
		50	ø3	VPOD15-50S③-3J			50	ø1/8	VPOD15-50S③-1/8J	
			ø4	VPOD15-50S③-4J				ø5/32	VPOD15-50S③-5/32J	
			ø6	VPOD15-50S③-6J				ø1/4	VPOD15-50S③-1/4J	
	ø20	20	ø3	VPOD20-20S③-3J		ø20	20	ø1/8	VPOD20-20S③-1/8J	
			ø4	VPOD20-20S③-4J				ø5/32	VPOD20-20S③-5/32J	
			ø6	VPOD20-20S③-6J				ø1/4	VPOD20-20S③-1/4J	
		30	ø3	VPOD20-30S③-3J			30	ø1/8	VPOD20-30S③-1/8J	
			ø4	VPOD20-30S③-4J				ø5/32	VPOD20-30S③-5/32J	
			ø6	VPOD20-30S③-6J				ø1/4	VPOD20-30S③-1/4J	
		40	ø3	VPOD20-40S③-3J			40	ø1/8	VPOD20-40S③-1/8J	
			ø4	VPOD20-40S③-4J				ø5/32	VPOD20-40S③-5/32J	
			ø6	VPOD20-40S③-6J				ø1/4	VPOD20-40S③-1/4J	
		50	ø3	VPOD20-50S③-3J			50	ø1/8	VPOD20-50S③-1/8J	
			ø4	VPOD20-50S③-4J				ø5/32	VPOD20-50S③-5/32J	
			ø6	VPOD20-50S③-6J				ø1/4	VPOD20-50S③-1/4J	
	ø25	20	ø3	VPOD25-20S③-3J		ø25	20	ø1/8	VPOD25-20S③-1/8J	
			ø4	VPOD25-20S③-4J				ø5/32	VPOD25-20S③-5/32J	
			ø6	VPOD25-20S③-6J				ø1/4	VPOD25-20S③-1/4J	
		30	ø3	VPOD25-30S③-3J			30	ø1/8	VPOD25-30S③-1/8J	
			ø4	VPOD25-30S③-4J				ø5/32	VPOD25-30S③-5/32J	
			ø6	VPOD25-30S③-6J				ø1/4	VPOD25-30S③-1/4J	
		40	ø3	VPOD25-40S③-3J			40	ø1/8	VPOD25-40S③-1/8J	
			ø4	VPOD25-40S③-4J				ø5/32	VPOD25-40S③-5/32J	
			ø6	VPOD25-40S③-6J				ø1/4	VPOD25-40S③-1/4J	
		50	ø3	VPOD25-50S③-3J			50	ø1/8	VPOD25-50S③-1/8J	
			ø4	VPOD25-50S③-4J				ø5/32	VPOD25-50S③-5/32J	
			ø6	VPOD25-50S③-6J				ø1/4	VPOD25-50S③-1/4J	
	ø30	20	ø3	VPOD30-20S③-3J		ø30	20	ø1/8	VPOD30-20S③-1/8J	
			ø4	VPOD30-20S③-4J				ø5/32	VPOD30-20S③-5/32J	
			ø6	VPOD30-20S③-6J				ø1/4	VPOD30-20S③-1/4J	
		30	ø3	VPOD30-30S③-3J			30	ø1/8	VPOD30-30S③-1/8J	
			ø4	VPOD30-30S③-4J				ø5/32	VPOD30-30S③-5/32J	
			ø6	VPOD30-30S③-6J				ø1/4	VPOD30-30S③-1/4J	
		40	ø3	VPOD30-40S③-3J			40	ø1/8	VPOD30-40S③-1/8J	
			ø4	VPOD30-40S③-4J				ø5/32	VPOD30-40S③-5/32J	
			ø6	VPOD30-40S③-6J				ø1/4	VPOD30-40S③-1/4J	
		50	ø3	VPOD30-50S③-3J			50	ø1/8	VPOD30-50S③-1/8J	
			ø4	VPOD30-50S③-4J				ø5/32	VPOD30-50S③-5/32J	
			ø6	VPOD30-50S③-6J				ø1/4	VPOD30-50S③-1/4J	
	ø35	20	ø3	VPOD35-20S③-3J		ø35	20	ø1/8	VPOD35-20S③-1/8J	
			ø4	VPOD35-20S③-4J				ø5/32	VPOD35-20S③-5/32J	
			ø6	VPOD35-20S③-6J				ø1/4	VPOD35-20S③-1/4J	
		30	ø3	VPOD35-30S③-3J			30	ø1/8	VPOD35-30S③-1/8J	
			ø4	VPOD35-30S③-4J				ø5/32	VPOD35-30S③-5/32J	
			ø6	VPOD35-30S③-6J				ø1/4	VPOD35-30S③-1/4J	
		40	ø3	VPOD35-40S③-3J			40	ø1/8	VPOD35-40S③-1/8J	
			ø4	VPOD35-40S③-4J				ø5/32	VPOD35-40S③-5/32J	
			ø6	VPOD35-40S③-6J				ø1/4	VPOD35-40S③-1/4J	
		50	ø3	VPOD35-50S③-3J			50	ø1/8	VPOD35-50S③-1/8J	
			ø4	VPOD35-50S③-4J				ø5/32	VPOD35-50S③-5/32J	
			ø6	VPOD35-50S③-6J	ø1/4			VPOD35-50S③-1/4J		
ø50	20	ø3	VPOD50-20S③-3J	ø50	20	ø1/8	VPOD50-20S③-1/8J			
		ø4	VPOD50-20S③-4J			ø5/32	VPOD50-20S③-5/32J			
		ø6	VPOD50-20S③-6J			ø1/4	VPOD50-20S③-1/4J			
	30	ø3	VPOD50-30S③-3J		30	ø1/8	VPOD50-30S③-1/8J			
		ø4	VPOD50-30S③-4J			ø5/32	VPOD50-30S③-5/32J			
		ø6	VPOD50-30S③-6J			ø1/4	VPOD50-30S③-1/4J			
	40	ø3	VPOD50-40S③-3J		40	ø1/8	VPOD50-40S③-1/8J			
		ø4	VPOD50-40S③-4J			ø5/32	VPOD50-40S③-5/32J			
		ø6	VPOD50-40S③-6J			ø1/4	VPOD50-40S③-1/4J			
	50	ø3	VPOD50-50S③-3J		50	ø1/8	VPOD50-50S③-1/8J			
		ø4	VPOD50-50S③-4J			ø5/32	VPOD50-50S③-5/32J			
		ø6	VPOD50-50S③-6J			ø1/4	VPOD50-50S③-1/4J			

Vacuum Pad Sponge Type

RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad dia. (mm)	Stroke (mm)	Male thread size	Model code	Connection config. code
Spring type, Side port, Female thread, No cover VPOD 	ø10	20	M6×1	VPOD10-20S- S -M6	M6
		30		VPOD10-30S- S -M6	
		40		VPOD10-40S- S -M6	
		50		VPOD10-50S- S -M6	
	ø15	20	M6×1	VPOD15-20S- S -M6	
		30		VPOD15-30S- S -M6	
		40		VPOD15-40S- S -M6	
		50		VPOD15-50S- S -M6	
	ø20	20	M6×1	VPOD20-20S- S -M6	
		30		VPOD20-30S- S -M6	
		40		VPOD20-40S- S -M6	
		50		VPOD20-50S- S -M6	
	ø25	20	M6×1	VPOD25-20S- S -M6	
		30		VPOD25-30S- S -M6	
		40		VPOD25-40S- S -M6	
		50		VPOD25-50S- S -M6	
	ø30	20	M6×1	VPOD30-20S- S -M6	
		30		VPOD30-30S- S -M6	
		40		VPOD30-40S- S -M6	
		50		VPOD30-50S- S -M6	
	ø35	20	M6×1	VPOD35-20S- S -M6	
		30		VPOD35-30S- S -M6	
		40		VPOD35-40S- S -M6	
		50		VPOD35-50S- S -M6	
	ø50	20	M6×1	VPOD50-20S- S -M6	
		30		VPOD50-30S- S -M6	
		40		VPOD50-40S- S -M6	
		50		VPOD50-50S- S -M6	

Notes
*Barb fitting type holders are also selectable.
Contact us for the details.

CAD data is available
at PISCO website.

Packaging specifications
1 pc./bag



Optional items
⇒ P.677



RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad dia. (mm)	Stroke (mm)	Tube O.D. (mm)	Model code	Connection config. code	Pad dia. (mm)	Stroke (mm)	Tube O.D. (inch)	Model code	Connection config. code
Spring type, Side port, Push-in fitting, Low dust emission VPLFD 	ø10	5	ø3	VPLFD10-5S- S -3J	M6	ø10	5	ø1/8	VPLFD10-5S- S -1/8J	M6
			ø4	VPLFD10-5S- S -4J				ø5/32	VPLFD10-5S- S -5/32J	
			ø6	VPLFD10-5S- S -6J				ø1/4	VPLFD10-5S- S -1/4J	
		10	ø3	VPLFD10-10S- S -3J			10	ø1/8	VPLFD10-10S- S -1/8J	
			ø4	VPLFD10-10S- S -4J				ø5/32	VPLFD10-10S- S -5/32J	
			ø6	VPLFD10-10S- S -6J				ø1/4	VPLFD10-10S- S -1/4J	
		15	ø3	VPLFD10-15S- S -3J			15	ø1/8	VPLFD10-15S- S -1/8J	
			ø4	VPLFD10-15S- S -4J				ø5/32	VPLFD10-15S- S -5/32J	
			ø6	VPLFD10-15S- S -6J				ø1/4	VPLFD10-15S- S -1/4J	
		20	ø3	VPLFD10-20S- S -3J			20	ø1/8	VPLFD10-20S- S -1/8J	
			ø4	VPLFD10-20S- S -4J				ø5/32	VPLFD10-20S- S -5/32J	
			ø6	VPLFD10-20S- S -6J				ø1/4	VPLFD10-20S- S -1/4J	
	ø15	5	ø3	VPLFD15-5S- S -3J		ø15	5	ø1/8	VPLFD15-5S- S -1/8J	
			ø4	VPLFD15-5S- S -4J				ø5/32	VPLFD15-5S- S -5/32J	
			ø6	VPLFD15-5S- S -6J				ø1/4	VPLFD15-5S- S -1/4J	
		10	ø3	VPLFD15-10S- S -3J			10	ø1/8	VPLFD15-10S- S -1/8J	
			ø4	VPLFD15-10S- S -4J				ø5/32	VPLFD15-10S- S -5/32J	
			ø6	VPLFD15-10S- S -6J				ø1/4	VPLFD15-10S- S -1/4J	
		15	ø3	VPLFD15-15S- S -3J			15	ø1/8	VPLFD15-15S- S -1/8J	
			ø4	VPLFD15-15S- S -4J				ø5/32	VPLFD15-15S- S -5/32J	
			ø6	VPLFD15-15S- S -6J				ø1/4	VPLFD15-15S- S -1/4J	
		20	ø3	VPLFD15-20S- S -3J			20	ø1/8	VPLFD15-20S- S -1/8J	
			ø4	VPLFD15-20S- S -4J				ø5/32	VPLFD15-20S- S -5/32J	
			ø6	VPLFD15-20S- S -6J				ø1/4	VPLFD15-20S- S -1/4J	
	ø20	5	ø3	VPLFD20-5S- S -3J		ø20	5	ø1/8	VPLFD20-5S- S -1/8J	
			ø4	VPLFD20-5S- S -4J				ø5/32	VPLFD20-5S- S -5/32J	
			ø6	VPLFD20-5S- S -6J				ø1/4	VPLFD20-5S- S -1/4J	
		10	ø3	VPLFD20-10S- S -3J			10	ø1/8	VPLFD20-10S- S -1/8J	
			ø4	VPLFD20-10S- S -4J				ø5/32	VPLFD20-10S- S -5/32J	
			ø6	VPLFD20-10S- S -6J				ø1/4	VPLFD20-10S- S -1/4J	
		15	ø3	VPLFD20-15S- S -3J			15	ø1/8	VPLFD20-15S- S -1/8J	
			ø4	VPLFD20-15S- S -4J				ø5/32	VPLFD20-15S- S -5/32J	
			ø6	VPLFD20-15S- S -6J				ø1/4	VPLFD20-15S- S -1/4J	
		20	ø3	VPLFD20-20S- S -3J			20	ø1/8	VPLFD20-20S- S -1/8J	
			ø4	VPLFD20-20S- S -4J				ø5/32	VPLFD20-20S- S -5/32J	
			ø6	VPLFD20-20S- S -6J				ø1/4	VPLFD20-20S- S -1/4J	
	ø25	5	ø3	VPLFD25-5S- S -3J		ø25	5	ø1/8	VPLFD25-5S- S -1/8J	
			ø4	VPLFD25-5S- S -4J				ø5/32	VPLFD25-5S- S -5/32J	
			ø6	VPLFD25-5S- S -6J				ø1/4	VPLFD25-5S- S -1/4J	
		10	ø3	VPLFD25-10S- S -3J			10	ø1/8	VPLFD25-10S- S -1/8J	
			ø4	VPLFD25-10S- S -4J				ø5/32	VPLFD25-10S- S -5/32J	
			ø6	VPLFD25-10S- S -6J				ø1/4	VPLFD25-10S- S -1/4J	
		15	ø3	VPLFD25-15S- S -3J			15	ø1/8	VPLFD25-15S- S -1/8J	
			ø4	VPLFD25-15S- S -4J				ø5/32	VPLFD25-15S- S -5/32J	
			ø6	VPLFD25-15S- S -6J				ø1/4	VPLFD25-15S- S -1/4J	
		20	ø3	VPLFD25-20S- S -3J			20	ø1/8	VPLFD25-20S- S -1/8J	
			ø4	VPLFD25-20S- S -4J				ø5/32	VPLFD25-20S- S -5/32J	
			ø6	VPLFD25-20S- S -6J				ø1/4	VPLFD25-20S- S -1/4J	
	ø30	5	ø3	VPLFD30-5S- S -3J		ø30	5	ø1/8	VPLFD30-5S- S -1/8J	
			ø4	VPLFD30-5S- S -4J				ø5/32	VPLFD30-5S- S -5/32J	
			ø6	VPLFD30-5S- S -6J				ø1/4	VPLFD30-5S- S -1/4J	
		10	ø3	VPLFD30-10S- S -3J			10	ø1/8	VPLFD30-10S- S -1/8J	
			ø4	VPLFD30-10S- S -4J				ø5/32	VPLFD30-10S- S -5/32J	
			ø6	VPLFD30-10S- S -6J				ø1/4	VPLFD30-10S- S -1/4J	
		15	ø3	VPLFD30-15S- S -3J			15	ø1/8	VPLFD30-15S- S -1/8J	
			ø4	VPLFD30-15S- S -4J				ø5/32	VPLFD30-15S- S -5/32J	
			ø6	VPLFD30-15S- S -6J				ø1/4	VPLFD30-15S- S -1/4J	
		20	ø3	VPLFD30-20S- S -3J			20	ø1/8	VPLFD30-20S- S -1/8J	
			ø4	VPLFD30-20S- S -4J				ø5/32	VPLFD30-20S- S -5/32J	
			ø6	VPLFD30-20S- S -6J				ø1/4	VPLFD30-20S- S -1/4J	
ø35	5	ø3	VPLFD35-5S- S -3J	ø35	5	ø1/8	VPLFD35-5S- S -1/8J			
		ø4	VPLFD35-5S- S -4J			ø5/32	VPLFD35-5S- S -5/32J			
		ø6	VPLFD35-5S- S -6J			ø1/4	VPLFD35-5S- S -1/4J			
	10	ø3	VPLFD35-10S- S -3J		10	ø1/8	VPLFD35-10S- S -1/8J			
		ø4	VPLFD35-10S- S -4J			ø5/32	VPLFD35-10S- S -5/32J			
		ø6	VPLFD35-10S- S -6J			ø1/4	VPLFD35-10S- S -1/4J			
	15	ø3	VPLFD35-15S- S -3J		15	ø1/8	VPLFD35-15S- S -1/8J			
		ø4	VPLFD35-15S- S -4J			ø5/32	VPLFD35-15S- S -5/32J			
		ø6	VPLFD35-15S- S -6J			ø1/4	VPLFD35-15S- S -1/4J			
	20	ø3	VPLFD35-20S- S -3J		20	ø1/8	VPLFD35-20S- S -1/8J			
		ø4	VPLFD35-20S- S -4J			ø5/32	VPLFD35-20S- S -5/32J			
		ø6	VPLFD35-20S- S -6J			ø1/4	VPLFD35-20S- S -1/4J			
ø50	5	ø3	VPLFD50-5S- S -3J	ø50	5	ø1/8	VPLFD50-5S- S -1/8J			
		ø4	VPLFD50-5S- S -4J			ø5/32	VPLFD50-5S- S -5/32J			
		ø6	VPLFD50-5S- S -6J			ø1/4	VPLFD50-5S- S -1/4J			
	10	ø3	VPLFD50-10S- S -3J		10	ø1/8	VPLFD50-10S- S -1/8J			
		ø4	VPLFD50-10S- S -4J			ø5/32	VPLFD50-10S- S -5/32J			
		ø6	VPLFD50-10S- S -6J			ø1/4	VPLFD50-10S- S -1/4J			
	15	ø3	VPLFD50-15S- S -3J		15	ø1/8	VPLFD50-15S- S -1/8J			
		ø4	VPLFD50-15S- S -4J			ø5/32	VPLFD50-15S- S -5/32J			
		ø6	VPLFD50-15S- S -6J			ø1/4	VPLFD50-15S- S -1/4J			
	20	ø3	VPLFD50-20S- S -3J		20	ø1/8	VPLFD50-20S- S -1/8J			
		ø4	VPLFD50-20S- S -4J			ø5/32	VPLFD50-20S- S -5/32J			
		ø6	VPLFD50-20S- S -6J			ø1/4	VPLFD50-20S- S -1/4J			

Vacuum Pad Sponge Type

RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad dia. (mm)	Stroke (mm)	Male thread size	Model code	Connection config. code
Spring type, Side port, Female thread, Low dust emission VPLFD 	ø10	5	M6×1	VPLFD10-5S- 6 -M6	M6
		10	M6×1	VPLFD10-10S- 6 -M6	
		15	M6×1	VPLFD10-15S- 6 -M6	
		20	M6×1	VPLFD10-20S- 6 -M6	
	ø15	5	M6×1	VPLFD15-5S- 6 -M6	
		10	M6×1	VPLFD15-10S- 6 -M6	
		15	M6×1	VPLFD15-15S- 6 -M6	
		20	M6×1	VPLFD15-20S- 6 -M6	
	ø20	5	M6×1	VPLFD20-5S- 6 -M6	
		10	M6×1	VPLFD20-10S- 6 -M6	
		15	M6×1	VPLFD20-15S- 6 -M6	
		20	M6×1	VPLFD20-20S- 6 -M6	
	ø25	5	M6×1	VPLFD25-5S- 6 -M6	
		10	M6×1	VPLFD25-10S- 6 -M6	
		15	M6×1	VPLFD25-15S- 6 -M6	
		20	M6×1	VPLFD25-20S- 6 -M6	
	ø30	5	M6×1	VPLFD30-5S- 6 -M6	
		10	M6×1	VPLFD30-10S- 6 -M6	
		15	M6×1	VPLFD30-15S- 6 -M6	
		20	M6×1	VPLFD30-20S- 6 -M6	
	ø35	5	M6×1	VPLFD35-5S- 6 -M6	
		10	M6×1	VPLFD35-10S- 6 -M6	
		15	M6×1	VPLFD35-15S- 6 -M6	
		20	M6×1	VPLFD35-20S- 6 -M6	
	ø50	5	M6×1	VPLFD50-5S- 6 -M6	
		10	M6×1	VPLFD50-10S- 6 -M6	
		15	M6×1	VPLFD50-15S- 6 -M6	
		20	M6×1	VPLFD50-20S- 6 -M6	

Notes
*Barb fitting type holders are also selectable.
Contact us for the details.

Packaging specifications
1 pc./bag

Optional items
⇒ P.677

Fall Prevention Valve  Swivel Joint for vacuum pad  Filter 

PISCO

>>> <https://www.pisco.co.jp/en>

RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Metric male threads, metric female threads, taper pipe threads, parallel pipe threads and NPT threads are available. See Pad holder only (page 399) for variations.				
Fixed type, Direct mount, Standard	*Pads with the same configuration code as the holder can be connected. (See Pad rubber only (page 382)).				
VPE	Metric male thread: M8, M10, M12, M14 Metric female thread: M5, M8 Taper pipe thread: R1/8, R1/4, R3/8, R1/2 Parallel pipe thread: G1/8, G1/4, G3/8, G1/2 NPT thread: NPT1/8, NPT1/4, NPT3/8, NPT1/2				
	Applicable Screws				
Holder type	Pad dia. (mm)	Female thread size	Model code	12 -S3 -S3 spec.	Connect config. code
Spring type, Direct mount VPF	ø10	M14x1	VPF10S-6-12	☐	M6
	ø15	M14x1	VPF15S-6-12	☐	
	ø20	M14x1	VPF20S-6-12	☐	
	ø25	M14x1	VPF25S-6-12	☐	
	ø30	M14x1	VPF30S-6-12	☐	
	ø35	M14x1	VPF35S-6-12	☐	
	ø50	M14x1	VPF50S-6-12	☐	
Stroke 5.8mm					

CAD
CAD data is available
at PISCO website.

Packaging specifications
1 pc./bag

Options
⑧: -DC ⇒ Holder with dust catcher
⑫: -S3 ⇒ -S3 spec. (○ in the lists: Available)
*1. For "-S3 spec.", the release ring color is dark blue, and the gasket material is FKM+SUS316.
*2. For inch size push-in fitting, the release ring color is white even for "-S3 spec."

Optional items (○: -S3 spec. is available)

⑧ Dust Catcher: -DC

Optional	Connection config. code	-S3 spec.
Dust catcher (-DC)	M6	○
Holder type	M10	○
VPC VPD VPF		
  		
* Configuration code: M10 is not available for VPF holder.		

Characteristics of Dust Catcher ► P.731

⑨ Fall Prevention Valve: -ECV

Optional	Connection config. code	Model code
Fall Prevention Valve (-ECV)	M6	ECVM6-FM6
	M10	ECVM10-FM10

Characteristics of Fall Prevention Valve ► P.722

⑫ Swivel Joint: -FH, -FHH, -CFH

Optional	Swivel angle	Connection config. code	Model code
	30° (-FH)	M6	FH20
		M10	FH60
	15° (-FHH)	M6	FH20-15
		M10	FH60-15

Characteristics of Ball Swivel Joint ► P.724

Optional	Connection config. code	-S3 spec.	Model code ^(*)
Flexible Swing Joint (-CFH)	M6	○	CFHM6-FM6
*1. When ordering a Flexible Swing Joint alone, please enter "-S3" at the end of the model code for -S3 specification. *2. Limited to M5 threads of VPME and VPE holders.			

Characteristics of Flexible Swing Joint ► P.725


⑬ Filter: -F15, -F30

Optional	Filter area	Connection config. code	Model code
	1.7cm ² (-F15)	M6	VFF15-M6
	7cm ² (-F30)	M6	VFF30-M6

Characteristics of Filter ► P.726


See the page 656 for the model designation including optional items.

Replacement parts (○: -S3 spec. is available)




Pad screw Model code	○ -S3 spec.	Applicable pad dia. (mm)	Connection config. code
VPM610-15	○	ø35, ø50	M6
VPM1018 *		ø70, ø100	M10


Pad screws marked with () do not contain copper-based metallic materials in flow paths.




O-ring Model code	○ -S3 spec.	Applicable pad dia. (mm)	Connection config. code
S8	○	ø35, ø50	M6



Gasket Model code	Applicable pad dia. (mm)	Connection config. code
SG10	ø70, ø100	M10




Gasket Model code	Applicable pad dia. (mm)	Connection config. code
VPFG10	ø10 to ø50	M6



Stop ring Model code	Applicable pad dia. (mm)	Connection config. code
VPW12	ø20	
VPW16	ø25	M6
VPW22	ø30	

Gasket(*) Model code	Applicable pad dia. (mm)	Connection config. code
GAS-M6 (Fall prevention)	ø10 to ø30	M6
-S3 spec.		
GAS-M6-SUS	ø10 to ø30	M6


*Gasket for dia. 10 to 30 mm pad is equipped with a Pad & Screw set. The model code above is for Gasket alone.



Filter element Model code	Applicable pad dia. (mm)	Connection config. code
SEE1202	ø20	
SFE35	ø25, ø35	M6
SFE2202	ø30	
SFE50	ø50	
SFE70	ø70	M10
SFE100	ø100	



Packaging specifications
 1 pc./bag: Pad frame
 10 pcs./bag: All replacement parts except for Pad frame




Plain washer Model code	Applicable pad dia. (mm)	Connection config. code
HW8.4×15.5×1.6	ø35	M6
HW8.5×22×1.6	ø50	
HW10.5×22×1.6	ø70, ø100	M10

Pad frame Model code	Applicable pad dia. (mm)	Connection config. code
VPH35S	ø35	M6
VPH50S	ø50	
VPH70S	ø70	M10
VPH100S	ø100	

C-shaped retaining ring Model code	Applicable pad dia. (mm)	Connection config. code
VPR16	ø35	M6
VPR26	ø50	
VPR40	ø70	M10
VPR60	ø100	

1. PISCO's Vacuum pad series consists of the combination of vacuum pads and holders.

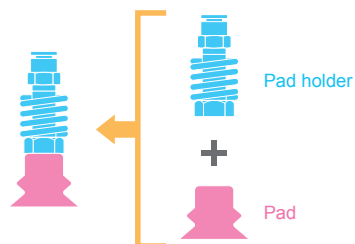


2. Vacuum pad and pad holder have a specific connection type depending on the size and shape.

	Insert type (Direct connection)		Mount type (Direct connection)		Screw type (Connection with screw)	
Pad connection type						
Connection configuration code	H3		T4 T8 T15 T40 (Exclusive to soft type & soft bellows type vacuum pads) PB8 PB15 (Exclusive to Vacuum pad for packaging bag) E10 E20 (Exclusive to Oval type vacuum pad)		M4 M6 M10 M20 G1 G2 G3 G4	

*As shown in above drawings, Vacuum pad and pad holder are connected with a screw or a rim.

3. Any Vacuum pad and pad holder can be connected, as long as their connection configuration codes are same.

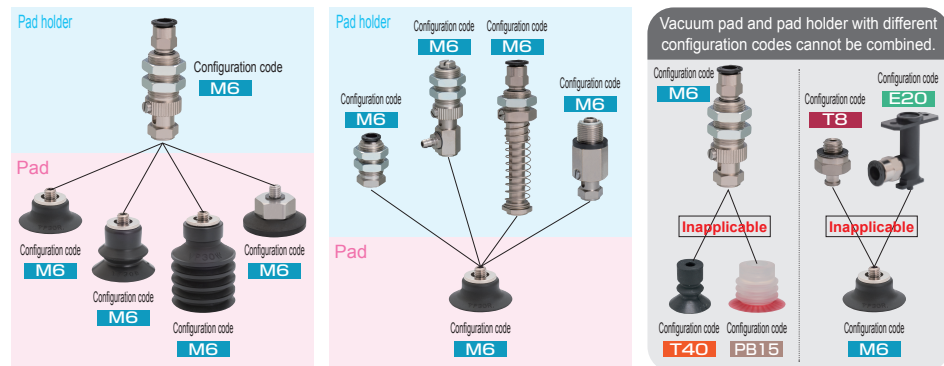

If you have purchased a pad and holder set but want to install a different pad or replace the holder with a different one...

→ Please check the connection configuration code of your pad or pad holder and select the one that matches the configuration code.

4. Please refer to the below chart for the "Connection Configuration Code".

Connection configuration code list (Holder)

●Common holder

		Fixed type				Spring type		
		Mini	Standard	Mini	Slim	Standard	No cover	Low dust emission
		VPMA	VPA	VPMC	VPSC	VPC	VPOC	VPLFC
Top port	Type							
	Configuration code	T4 T8 M4 M6	H3 T8 M4 M6 M10 M20 G1 G2 G3 G4	T4 T8 M4 M6	H3 T8	H3 T8 M4 M6 M10 M20 G1 G2 G3 G4	T8 M4 M6	T4 T8 M4 M6
Side port	Type				—			
	Configuration code	T4 T8 M4 M6	H3 T8 M4 M6 M10 M20 G1 G2 G3 G4	T4 T8 M4 M6	—	H3 T8 M4 M6 M10 M20 G1 G2 G3 G4	T8 M4 M6	T4 T8 M4 M6
Direct mount	Type			—	—		Holders with configuration code: G1 to G4 can be connected to VPE holders.  Holder with configuration code: G1, G2, G3 and G4  VPE holder (Male thread): G1, G2, G3, and G4  Vacuum Pad	
	Configuration code	T4 T8	H3 T4 T8 M4 M6 M10 M20 T15 T40	—	—	H3 T8 M4 M6		

- Common holder (Lightweight/Low profile)

	Top port	Side port	Dual side port
Spring type (Left/right)	Code VPHC	VPHD	VPHDW
	Type 		
	Configuration code T15 T40 M4 M6	T15 T40 T8 M4 M6	T15 T40 T8 M4 M6
Fixed type: Direct mount (Low profile)	Code —	VPHE	VPHEW
	Type —		
	Configuration code —	T15 T40 T8 M4 M6	T15 T40 T8 M4 M6

●Special holder *Pads of other shapes cannot be installed

For overall type	Code	VPA	VPB
		Top port	Side port
	Type		
	Configuration code	E10 E20	E10 E20
For packaging bag	Code	VPA	VPE
		Fixed type	Direct mount
	Type		
	Configuration code	PB8 PB15	PB8 PB1


Connection configuration code list (Pad) (○: Available)

Pad type or application															Pad type or application	
	Small	Standard General	Deep	Bellows	Multi-bellows	Metal detectable	Skidproof	Flat (Large section low type)	Mark-free	Soft	Soft bellows	Sponge	Ultrathin	For packaging bag		Oval
Code	RM	R	A	B	W	BE,BD	K	F,FH	Q	L	LB	S	P	PB	Code	E
0.7															2x4	
1															3.5x7	
1.5															4x10	
2															5x10	
3															6x10	
4															4x20	
6															5x20	
8															5x30	
10															6x20	
15															6x30	
20															8x20	
25															8x30	
30															8x30	
35															8x30	
40															8x30	
50															8x30	
60															8x30	
70															8x30	
80															8x30	
100															8x30	
150															8x30	
200															8x30	

Some combinations are possible by using a conversion screw adapter.

H3, T4 and T8 can be converted to M4 or M6. M4 to M6 conversion is also available. For details, please see "Rearrangement parts" of each pad type.

Model Designation (Example)



(1) Vacuum Pad

(2) Pad size (3) Pad type (6) Connection configuration code *Required for Pad & screw set only. (○: Available)

Pad type or application	Small	General	Deep	Bellows	Multi-bellows	Metal detectable	Skidproof	Flat (Large suction flow type)	Mark-free	Soft	Soft bellows	Sponge	Ultrathin	For packaging bag	Pad type or application
Code	RM	R	A	B	W	BE, BD	K	F, FH	Q	L	LB	S	P	PB	Code
0.7	○	○	○	○	○	○	○	○	○	○	○	○	○	○	2x4
1	○	○	○	○	○	○	○	○	○	○	○	○	○	○	3.5x7
1.5	○	○	○	○	○	○	○	○	○	○	○	○	○	○	4x10
2	○	○	○	○	○	○	○	○	○	○	○	○	○	○	5x10
3	○	○	○	○	○	○	○	○	○	○	○	○	○	○	6x10
4	○	○	○	○	○	○	○	○	○	○	○	○	○	○	4x20
6	○	○	○	○	○	○	○	○	○	○	○	○	○	○	4x30
8	○	○	○	○	○	○	○	○	○	○	○	○	○	○	5x30
10	○	○	○	○	○	○	○	○	○	○	○	○	○	○	6x30
15	○	○	○	○	○	○	○	○	○	○	○	○	○	○	8x20
20	○	○	○	○	○	○	○	○	○	○	○	○	○	○	8x30
25	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
30	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
35	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
40	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
50	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
60	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
70	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
80	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
100	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
150	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
200	○	○	○	○	○	○	○	○	○	○	○	○	○	○	

(4) Pad material (○: Available)

Code	N	S	U	F	SE	NE	G	HN	EP	FS	NH	YS2	YS4	MSF3	MSF5	MSS3	MSS5
Rubber material	Nitrile	Silicone	Urethane	Fluoro	Conductive silicone	Conductive NBR (Low resistance)	Food Sanit. Act compliant NBR	HNBR	EPDM	Fluoro-silicone	Oil proof NBR	Extra soft silicone	Iron powder type	SUS powder type	Metal detectable silicone		
Pad color	Black	Clear white	Dark blue	Gray	Black	Black	Light gray	Black	Black	Red-orange	Black	Pink	Blue	Reddish-brown	Dark-green	Brown	Green
Material code marking ¹⁾	None	None	None	None	SE	NE	None	HN	EP	None	None	None	None	SF	SF	SS	SS
Standard	General	Deep	Small														
Soft	L																
Soft bellows	LB																
Skidproof	K																
Bellows	B																
Multi-bellows	W																
For packaging bag	PB																
Metal Detectable	BE																
Ultrathin	P																
Flat	F																
Flat large suction flow	FH																
Oval	E																

● Mark-free type (Pad type code: Q)

Code	K	M	KE
Resin material	PEEK	POM	Conductive PEEK
Pad color	Beige	White	Black

● Sponge type (Pad type code: S)

Code	S	C
Rubber material	Silicone	Chloroprene
Pad color	Dark-orange	Black

¹⁾ For vacuum pads in black color (SE: Conductive silicone, NE: Conductive NBR (low resistance), HN: HNBR and EP: EPDM) and Vacuum pad Metal Detectable type, the pad material code is marked on the top or the side of the vacuum pad for material identification. (The marking on black vacuum pads has started since Oct. 2023 gradually.)



²⁾ Some materials are not available depending on pad size. Please see the catalog for details.

³⁾ Pad color of pads for Packaging bag. Lip hardness 20° (Pink) Lip hardness 40° (Blue)

⁴⁾ The Conductive Silicone rubber (SE) is a silicon rubber capable of releasing static electricity. (Volume resistance: More than 200 Ω·cm and 10⁵ Ω·cm or less)

⁵⁾ Nitrile rubber (N), Conductive NBR (Low resistance, Volume resistance: 200Ω·cm or less) (NE), Food Sanitation Act-compliant NBR (G), Oil proof NBR (NH) are not suitable for use with ozone environment.

⁶⁾ Extra soft silicone (YS2/YS4), Metal detectable silicone and Silicone for Packaging bag are compliant with Food Sanitation Act and FDA.

⁷⁾ Volume resistance of Conductive PEEK (KE) is 10⁵ to 10⁶ Ω·cm.

(5) Surface treatment (Optional) (○: Available)

Code			No code	-NF	-SF	-DL	-ER	-FG
Surface treatment			None	Fiber surface		DLC. coating	Reformed surface	Fluoro-coating
				Nylon fiber	Silk fiber			
			—					
Applicable pad material			—	Silicone (S) Fluoro (F)	Silicone (S) Fluoro (F)	Silicone (S) Fluoro (F) Conductive silicone (SE)	Nitrile (N) Conductive NBR (NE)	Silicone (S) Conductive silicone (SE) Extra soft silicone (YS2, YS4)
Pad type	Standard	General	R	—	—	○	○	○
		Deep	A	—	—	○	○	○
		Small	RM	—	—	—	○	○
	Soft		L	—	○	○	○	○
	Soft bellows		LB	—	○	○	○	○
	Skidproof		K	—	—	—	—	—
	Bellows		B	—	○	○	○	○
	Multi-bellows		W	—	—	○	○	○
	For packaging bag		PB	—	—	—	—	○
	Metal Detectable		BE,BD	—	—	—	—	—
	Ultrathin		P	—	—	○	○	—
	Flat		F	—	—	—	○	○
	Flat large suction flow		FH	—	—	—	○	○
	Mark-free		Q	—	—	—	—	—
Sponge		S	—	—	—	—	—	
Oval		E	—	—	—	○	○	

*Some surface treatments are not available depending on pad size.

Please refer to page 370 for the details of each pad surface type and treatment for Suction Mark-free.


(6) Connection configuration code (Required for Pad & screw set only.) Please refer to the Pad size and type list on the 374 page.

Code	No code	-M4	-M6	-M10	-M20	-M5 ^(*)
Connection config. code	—	M4	M6	M10	M20	—
Thread size	Pad rubber only	M4×0.7	M6×1	M10×1.5	M20×2	M5×0.8

*M5 thread is used for mounting on non-PISCO holders. Contact us for the price of screw set.

(7) Mark-free resin attachment material (Bellows type only) (Optional)

Code	No code	-QK	-QM	-QKE
Resin material	—	PEEK	POM	Conductive PEEK (Volume resistance: 10 ⁵ to 10 ⁶ Ω·cm)
	—			



¹⁾ Selectable for Bellows type pad dia. 10 to 30 mm.

²⁾ Resin attachment cannot be installed when selecting surface treatment.

³⁾ Resin attachment cannot be installed when selecting Extra soft silicone for pad material.

(8) -S3 spec. (Required for Pad & screw set only) (Optional)

Code	No code	-S3
Metal material	Standard	No copper-based metallic materials used in flow paths

Vacuum pad / Pad & screw set

Holders with the same "connection configuration code (M4, M6 etc.)" can be connected. For connectable holders, please see the page of Pad holder only (page 384).



Standard series, General type (R) and Deep type (A) Vacuum pad alone

Model code	○: Available as standard item									Connection config. code
	[4] Pad rubber material									
	N	S	U	F	SE	NE	G	HN	EP	
	Nitrile	Silicone	Urethane	Fluoro	Conductive silicone	Conductive NBR (Low resistance)	Food Sanit. Act compliant NBR	HNBR	EPDM	
VP1R[4]	○	○	○	○	○	○	○	○	○	
VP2R[4]	○	○	○	○	○	○	○	○	○	H3
VP3R[4]	○	○	○	○	○	○	○	○	○	
VP4R[4]	○	○	○	○	○	○	○	○	○	
VP6R[4][5]	○	○	○	○	○	○	○	○	○	T8
VP8R[4][5]	○	○	○	○	○	○	○	○	○	
VP10R[4][5]	○	○	○	○	○	○	○	○	○	
VP15R(A)[4][5]	●	●	●	●	●	●	●	●	●	IM4(3)
VP20R(A)[4][5]	●	●	●	●	●	●	●	●	●	
VP25R(A)[4][5]	●	●	●	●	●	●	●	●	●	
VP30R(A)[4][5]	●	●	●	●	●	●	●	●	●	IM6(3)
VP40R(A)[4][5]	●	●	●	●	●	●	●	●	●	
VP50R(A)[4][5]	●	●	●	●	●	●	●	●	●	
VP60R(A)[4][5]	●	●	●	●	○	—	—	●	●	M10(3)
VP80R(A)[4][5]	●	●	●	●	○	—	—	●	●	
VP100R(A)[4][5]	●	●	●	●	○	—	—	●	●	
VP150R[4][5]	○	○	○	○	○	○	—	○	○	M20(3)
VP200R[4][5]	○	○	○	○	○	○	—	○	○	

Available pad size and material for surface treatment (Standard series, General type & Deep type)

Pad dia. (mm)	[5] Surface treatment code				
	-NF	-SF	-DL	-ER	-FG
	Fiber surface	DLC	Reformed surface	Fluoro-coating	
	Nylon	Silk			
ø6	—	—	○	○	○
ø8	—	—	○	○	○
ø10	—	—	○	○	○
ø15	●	●	●	●	●
ø20	●	●	●	●	●
ø25	●	●	●	●	●
ø30	●	●	●	●	●
ø40	●	●	●	●	●
ø50	●	●	●	●	●
ø60	●	●	—	—	—
ø80	●	●	—	—	—
ø100	—	—	—	—	—
ø150	—	—	—	—	○
ø200	—	—	—	—	○
Material	S, F	S, F, SE	N, NE	S, SE	



Standard series, General type (R) and Deep type (A) Pad & screw set

Model code	○: Available as standard item									Connection config. code	
	[4] Pad rubber material										[8]
	N	S	U	F	SE	NE	G	HN	EP		-S3
	Nitrile	Silicone	Urethane	Fluoro	Conductive silicone	Conductive NBR (Low resistance)	Food Sant. Act compliant NBR	HNBR	EPDM		-S3 spec.
VP10R[A][4]5-M4[8]	○	○	○	○	○	○	○	○	○	○	M4
VP15R(A)[4]5-M4[8]	●	●	●	●	●	●	●	●	●	○	
VP20R(A)[4]5-M6[8]	●	●	●	●	●	●	●	●	●	○	
VP25R(A)[4]5-M6[8]	●	●	●	●	●	●	●	●	●	○	
VP30R(A)[4]5-M6[8]	●	●	●	●	●	●	●	●	●	○	M6
VP40R(A)[4]5-M6[8]	●	●	●	●	●	●	●	●	●	○	
VP50R(A)[4]5-M6[8]	●	●	●	●	●	●	●	●	●	○	
VP60R(A)[4]5-M10	●	●	●	●	○	○	—	●	●	*2	
VP80R(A)[4]5-M10[8]	●	●	●	●	○	○	—	●	●	○	M10
VP100R(A)[4]5-M10[8]	●	●	●	●	○	○	—	●	●	○	
VP150R[4]5-M20[8]	○	○	○	○	○	○	—	○	○	○	M20
VP200R[4]5-M20[8]	○	○	○	○	○	○	—	○	○	○	


P.406



Standard series, Small type Vacuum pad alone

Model code	○: Available as standard item								Connection config. code	
	[4] Pad rubber material									
	N	S	U	F	SE	NE	G	HN		EP
	Nitrile	Silicone	Urethane	Fluoro	Conductive silicone	Conductive NBR (Low resistance)	Food Sant. Act compliant NBR	HNBR		EPDM
VP0.7RM[4]5	○	○	○	○	○	○	○	○	○	
VP1RM[4]5	○	○	○	○	○	○	○	○	○	
VP1.5RM[4]5	○	○	○	○	○	○	○	○	○	
VP2RM[4]5	○	○	○	○	○	○	○	○	○	
VP3RM[4]5	○	○	○	○	○	○	○	○	○	
VP4RM[4]5	○	○	○	○	○	○	○	○	○	

T4

- Notes
- *1. For ● part in the table above, deep type of standard series is available.
- *2. For Pad & screw set of 60 mm pad dia. (for general type and deep type), the standard spec. is equivalent to "-S3" spec.
- *3. A pad screw is required to mount on the holder. If you do not have a pad screw, please select from the Pad & screw set.
- *4. Configuration code: H3 is not available for surface treatment.

CAD data is available at PISCO website.

Packaging specifications 1 pc./bag

Options

[5]: Surface treatment [8]: -S3 ⇒ -S3 spec.

Holders with the same "connection configuration code (M4, M6 etc.)" can be connected. For connectable holders, please see the page of Pad holder only (page 384).



Soft series,
Pad rubber alone

P.446

○: Available as standard item						Connection config. code	○: Available as standard item						Connection config. code	
Model code	[4] Pad rubber material						Model code	[4] Pad rubber material						[8] -S3 -S3 spec.
	N	S	FS	SE	NE			N	S	FS	SE	NE		
	Nitrile	Silicone	Fluoro silicone	Conductive silicone	Conductive NBR (Low resistance)			Nitrile	Silicone	Fluoro silicone	Conductive silicone	Conductive NBR (Low resistance)		
VP4L[4]5	○	○	○	○	○	T15 M4(*)	VP4L[4]5-M4[8]	○	○	○	○	○	M4	
VP6L[4]5	○	○	○	○	○		VP6L[4]5-M4[8]	○	○	○	○	○		
VP8L[4]5	○	○	○	○	○		VP8L[4]5-M4[8]	○	○	○	○	○		
VP10L[4]5	○	○	○	○	○	T40 M6(*)	VP10L[4]5-M4[8]	○	○	○	○	○	M6	
VP15L[4]5	○	○	○	○	○		VP15L[4]5-M4[8]	○	○	○	○	○		
VP20L[4]5	○	○	○	○	○		VP20L[4]5-M6[8]	○	○	○	○	○		
VP30L[4]5	○	○	○	○	○		VP30L[4]5-M6[8]	○	○	○	○	○		
VP40L[4]5	○	○	○	○	○		VP40L[4]5-M6[8]	○	○	○	○	○		



Soft series,
Pad & screw set

P.446





Soft bellows series, Pad rubber alone

Model code	○: Available as standard item							Connection config. code	
	[4] Pad rubber material								
	N	S	U	SE	NE	HN	EP		
	Nitrile	Silicone	Urethane	Conductive silicone	Conductive NBR (Low resistance)	HNBR	EPDM		
VP6LB[4]5	○	○	○	○	○	○	○	T15 M4[8]	
VP8LB[4]5	○	○	○	○	○	○	○		
VP10LB[4]5	○	○	○	○	○	○	○		
VP15LB[4]5	○	○	○	○	○	○	○	T40 M6[8]	
VP20LB[4]5	○	○	○	○	○	○	○		


P.48



Soft bellows series, Pad & screw set

Model code	○: Available as standard item										Connection config. code	
	[4] Pad rubber material									[8]		
	N	S	U	SE	NE	HN	EP					
	Nitrile	Silicone	Urethane	Conductive silicone	Conductive NBR (Low resistance)	HNBR	EPDM					
VP6LB[4]5-M4[8]	○	○	○	○	○	○	○	○	○	○		
VP8LB[4]5-M4[8]	○	○	○	○	○	○	○	○	○	○		
VP10LB[4]5-M4[8]	○	○	○	○	○	○	○	○	○	○		
VP15LB[4]5-M4[8]	○	○	○	○	○	○	○	○	○	○	M4	
VP20LB[4]5-M6[8]	○	○	○	○	○	○	○	○	○	○	M6	





Skidproof series,
Pad rubber alone





Skidproof series,
Pad & screw set

Model code	○: Available as standard item					Connection config. code	Model code	○: Available as standard item						Connection config. code
	[4] Pad rubber material							[4] Pad rubber material						
	NH	S	U	F	NE			NH	S	U	F	NE	-S3	
	Oil proof NBR	Silicone	Urethane	Fluoro	Conductive NBR (Low resistance)			Oil proof NBR	Silicone	Urethane	Fluoro	Conductive NBR (Low resistance)	-S3 spec.	
VP10K[4]	○	○	○	○	○	M4(*)	VP10K[4]-M4[8]	○	○	○	○	○	○	M4
VP20K[4]	○	○	○	○	○		VP20K[4]-M6[8]	○	○	○	○	○	○	
VP30K[4]	○	○	○	○	○		VP30K[4]-M6[8]	○	○	○	○	○	○	
VP40K[4]	○	○	○	○	○	M6(*)	VP40K[4]-M6[8]	○	○	○	○	○	○	M6
VP50K[4]	○	○	○	○	○		VP50K[4]-M6[8]	○	○	○	○	○	○	

Notes

*A screw adapter (Soft/Soft bellows series) or a pad screw (Skidproof series) is required to mount on the holder. If you do not have a screw adapter and a pad screw, please select from the Pad & screw set.

CAD data is available at PISCO website.

Packaging specifications 1 pc./bag

Options

[5]: Surface treatment [8]: -S3 ⇒ -S3 spec.

Vacuum pad / Pad & screw set

Holders with the same "connection configuration code (M4 , M6 etc.)" can be connected. For connectable holders, please see the page of Pad holder only (page 384-).



Bellows series,

Pad rubber alone

P526

Model code	○: Available as standard item										Connection config. code
	④ Pad rubber material										
	N	S	YS2	YS4	U	F	SE	NE	HN	EP	
	Nitrile	Silicone	Extra soft silicone ⁽²⁾ Hardness 20 [*]	Hardness 40 [*]	Urethane	Fluoro	Conductive silicone	Conductive NBR (Low resistance)	HNBR	EPDM	
VP2B④	○	○	—	—	—	—	—	—	—	—	H3
VP4B④	○	○	—	—	—	—	○	—	—	—	
VP6B④⑤	○	○	—	—	○	○	○	○	○	○	T8
VP8B④⑤	○	○	—	—	○	○	○	○	○	○	
VP10B④⑤	○	○	(*)	(*)	○	○	○	○	○	○	M4③
VP15B④⑤	○	○	(*)	○	○	○	○	○	○	○	
VP20B④⑤	○	○	○	○	○	○	○	○	○	○	M6③
VP25B④⑤	○	○	○	○	○	○	○	○	○	○	
VP30B④⑤	○	○	○	○	○	○	○	○	○	○	
VP40B④⑤	○	○	○	○	○	○	○	○	○	○	
VP50B④⑤	○	○	○	○	○	○	○	○	○	○	
VP60B④⑤	○	○	—	—	○	○	○	○	○	○	M10③
VP80B④⑤	○	○	—	—	○	○	○	○	○	○	
VP100B④⑤	○	○	—	—	○	○	○	○	○	○	



Bellows series,
Pad & screw set


P526

Model code	○: Available as standard item										Connection config. code	
	④ Pad rubber material											⑧
	N	S	YS2	YS4	U	F	SE	NE	HN	EP		-S3
	Nitrile	Silicone	Extra soft silicone ^{(*)2} Hardness 20 [°]	Hardness 40 [°]	Urethane	Fluoro	Conductive silicone	Conductive NBR (Low resistance)	HNBR	EPDM		-S3 spec.
VP10B④⑤-M4⑧	○	○	(*)4	(*)4	○	○	○	○	○	○	○	M4
VP15B④⑤-M4⑧	○	○	(*)4	○	○	○	○	○	○	○	○	
VP20B④⑤-M6⑧	○	○	○	○	○	○	○	○	○	○	○	
VP25B④⑤-M6⑧	○	○	○	○	○	○	○	○	○	○	○	M6
VP30B④⑤-M6⑧	○	○	○	○	○	○	○	○	○	○	○	
VP40B④⑤-M6⑧	○	○	○	○	○	○	○	○	○	○	○	
VP50B④⑤-M6⑧	○	○	○	○	○	○	○	○	○	○	○	M10
VP60B④⑤-M10	○	○	—	—	○	○	○	○	○	○	(*)1	
VP80B④⑤-M10⑧	○	○	—	—	○	○	○	○	○	○	○	
VP100B④⑤-M10⑧	○	○	—	—	○	○	○	○	○	○	○	

■ Available pad size and material for surface treatment (Bellows series)

Pad dia. (mm)	⑤ Surface treatment code				
	-NF	-SF	-DL	-ER	-FG
	Fiber surface Nylon	Silk coating	DLC coating	Reformed surface	Fluoro-coating (S, SE) (YS2, YS4)
φ6	—	—	○	○	—
φ8	—	—	○	○	—
φ10	—	—	○	○	—
φ15	○	○	○	○	○
φ20	○	○	○	○	○
φ25	○	○	○	○	○
φ30	○	○	○	○	○
φ40	○	○	○	○	○
φ50	○	○	○	○	○
φ60	○	○	—	○	—
φ80	○	○	—	○	—
φ100	—	—	—	○	—

*4.
Fluoro-coating of Extra soft silicone (YS2, YS4)
For Extra soft silicone pads, dia. 10 mm or 15 mm of 20* hardness type (YS2) and dia. 10 mm of 40* hardness type (YS4) can be selected only when Fluoro-coating treatment is selected.

Model code	YS2	YS4	⑧	Connection config. code
	Extra soft silicone ⁽²⁾ Hardness20*	Hardness40*	-S3	
	⑤	⑤	-S3 spec.	
VP10B④⑤-FG	○	○	—	M4③
VP15B④⑤-FG	○	—	—	
Pad & screw set				M4
VP10B④⑤-FG-M4⑧	○	○	○	
VP15B④⑤-FG-M4⑧	○	—	○	

Notes
*1. For Pad & screw set of Bellows series 60 mm pad dia., the standard spec. is equivalent to "-S3" spec.
*2. Extra soft silicone is compliant with Food Sanitation Act and FDA.
*3. A pad screw is required to mount on the holder. If you do not have a pad screw, please select from the Pad & screw set.

CAD data is available at PISCO website.
Packaging specifications 1 pc./bag
Options
⑤ : Surface treatment
⑧ : -S3 ⇒ -S3 spec.

Holders with the same "connection configuration code (M4 , M6 etc.)" can be connected. For connectable holders, please see the page of Pad holder only (page 384-).

Bellows series, with Resin attachment

P526

Picture of mark-free resin attachment with pad.


By attaching a resin attachment, bellows pad (pad dia.: 10 to 30 mm) can be used as Mark-free pad.

Model code	○: Available as standard item								Connection config. code	
	④ Pad rubber material									
	N	S	U	F	SE	NE	HN	EP		
	Nitrile	Silicone	Urethane	Fluoro	Conductive silicone	Conductive NBR (Low resistance)	HNBR	EPDM		
VP10B④⑤-QK	○	○	○	○	○	○	○	○	M4③①	
VP10B④⑤-QM	○	○	○	○	○	○	○	○		
VP10B④⑤-QKE	○	○	○	○	○	○	○	○		
VP15B④⑤-QK	○	○	○	○	○	○	○	○		
VP15B④⑤-QM	○	○	○	○	○	○	○	○		
VP15B④⑤-QKE	○	○	○	○	○	○	○	○	M6③①	
VP20B④⑤-QK	○	○	○	○	○	○	○	○		
VP20B④⑤-QM	○	○	○	○	○	○	○	○		
VP20B④⑤-QKE	○	○	○	○	○	○	○	○		
VP25B④⑤-QK	○	○	○	○	○	○	○	○		
VP25B④⑤-QM	○	○	○	○	○	○	○	○		
VP25B④⑤-QKE	○	○	○	○	○	○	○	○		
VP30B④⑤-QK	○	○	○	○	○	○	○	○		
VP30B④⑤-QM	○	○	○	○	○	○	○	○		
VP30B④⑤-QKE	○	○	○	○	○	○	○	○		

● How to attach

- (1) Fix a bellows pad and a pad holder with a pad screw.
- (2) Attach a resin attachment to the bellows pad.

Picture of mark-free resin attachment with pad
By attaching a resin attachment, bellows pad (pad dia.: 10 to 30 mm) can be used as Mark-free pad.

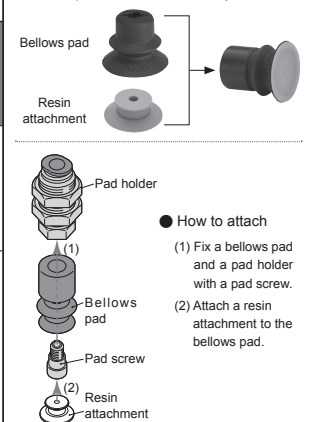



Bellows series,
Pad & screw set + Resin attachment

P526



Mark-free resin attachment for
Bellows series

P526

Model code	○: Available as standard item									Connection config. code	Model code	○: Available as standard item		
	④ Pad rubber material											④ Resin attachment material		
	N	S	U	F	SE	NE	HN	EP	-S3			K	M	KE
	Nitrile	Silicone	Urethane	Fluoro	Conductive silicone	Conductive NBR (Low resistance)	HNBR	EPDM	-S3 spec.			PEEK	POM	Conductive PEEK
VP10B④-M4-QK⑧	○	○	○	○	○	○	○	○	○	M4	VP10BQ④-AT	○	○	○
VP10B④-M4-QM⑧	○	○	○	○	○	○	○	○	○		VP15BQ④-AT	○	○	○
VP10B④-M4-QKE⑧	○	○	○	○	○	○	○	○	○		VP20BQ④-AT	○	○	○
VP15B④-M4-QK⑧	○	○	○	○	○	○	○	○	○		VP25BQ④-AT	○	○	○
VP15B④-M4-QM⑧	○	○	○	○	○	○	○	○	○		VP30BQ④-AT	○	○	○
VP15B④-M4-QKE⑧	○	○	○	○	○	○	○	○	○	M6				
VP20B④-M6-QK⑧	○	○	○	○	○	○	○	○	○					
VP20B④-M6-QM⑧	○	○	○	○	○	○	○	○	○					
VP20B④-M6-QKE⑧	○	○	○	○	○	○	○	○	○					
VP25B④-M6-QK⑧	○	○	○	○	○	○	○	○	○					
VP25B④-M6-QM⑧	○	○	○	○	○	○	○	○	○					
VP25B④-M6-QKE⑧	○	○	○	○	○	○	○	○	○					
VP30B④-M6-QK⑧	○	○	○	○	○	○	○	○	○					
VP30B④-M6-QM⑧	○	○	○	○	○	○	○	○	○					
VP30B④-M6-QKE⑧	○	○	○	○	○	○	○	○	○					

Mark-free resin attachment for Bellows series

Model code	○: Available as standard item		
	④ Resin attachment material		
	K	M	KE
	PEEK	POM	Conductive PEEK
VP10BQ④⑤-AT	○	○	○
VP15BQ④⑤-AT	○	○	○
VP20BQ④⑤-AT	○	○	○
VP25BQ④⑤-AT	○	○	○
VP30BQ④⑤-AT	○	○	○

Notes
*1. A pad screw is required to mount on the holder. If you do not have a pad screw, please select from the Pad & screw set.
*2. Resin attachment must be used with a vacuum pad for work conveyance.

CAD data is available at PISCO website.
Packaging specifications 1 pc./bag
Options
⑧ : -S3 ⇒ -S3 spec.

Vacuum pad / Pad & screw set

Holders with the same "connection configuration code" (M4, M6, etc.) can be connected. For connectable holders, please see the page of Pad holder only (page 384-).

Flat series, Pad rubber alone										Flat series, Pad & screw set									
○: Available as standard item										○: Available as standard item									
Model code	④ Pad rubber material						Connection config. code	Model code	④ Pad rubber material						Connection config. code				
	N	S	U	F	SE	NE			N	S	U	F	SE	NE		-S3			
	Nitrile	Silicone	Urethane	Fluoro	Conductive silicone	Conductive NBR (Low resistance)			Nitrile	Silicone	Urethane	Fluoro	Conductive silicone	Conductive NBR (Low resistance)		-S3 spec.			
VP10F④⑤	○	○	○	○	○	○	M4⑧⑨	VP10F④⑤-M4⑧	○	○	○	○	○	○	○	M4			
VP15F④⑤	○	○	○	○	○	○		VP15F④⑤-M4⑧	○	○	○	○	○	○	○		○		
VP20F④⑤	○	○	○	○	○	○	M6⑧⑨	VP20F④⑤-M6⑧	○	○	○	○	○	○	○	M6			
VP25F④⑤	○	○	○	○	○	○		VP25F④⑤-M6⑧	○	○	○	○	○	○	○		○		
VP30F④⑤	○	○	○	○	○	○		VP30F④⑤-M6⑧	○	○	○	○	○	○	○		○		

 Flat large suction flow series, Pad rubber alone							 Flat large suction flow series, Pad & screw set							
○: Available as standard item							○: Available as standard item							
Model code	④ Pad rubber material					Connection config. code	Model code	④ Pad rubber material					Connection config. code	
	N	S	F	SE	NE			N	S	F	SE	NE		⑤
	Nitrile	Silicone	Fluoro	Conductive silicone	Conductive NBR (Low resistance)			Nitrile	Silicone	Fluoro	Conductive silicone	Conductive NBR (Low resistance)		-S3 spec.
VP10FH④⑤	○	○	○	○	○	M4⑧	VP10FH④⑤-M4⑧	○	○	○	○	○	○	M4
VP15FH④⑤	○	○	○	○	○		VP15FH④⑤-M4⑧	○	○	○	○	○	○	
VP20FH④⑤	○	○	○	○	○	M6⑧	VP20FH④⑤-M6⑧	○	○	○	○	○	○	M6
VP25FH④⑤	○	○	○	○	○		VP25FH④⑤-M6⑧	○	○	○	○	○	○	
VP30FH④⑤	○	○	○	○	○		VP30FH④⑤-M6⑧	○	○	○	○	○	○	





P.642

Mark-free series,
Resin pad alone





P.642

Mark-free series,
with Flexible Swing Joint

Model code	○: Available as standard item			Connection config. code	Model code	○: Available as standard item			Connection config. code	
	④ Pad rubber material					④ Pad rubber material				
	K	M	KE			K	M	KE		
	PEEK	POM	Conductive PEEK			PEEK	POM	Conductive PEEK		
VP10Q④	○	○	○	M4①	VP10Q④-M4⑧	○	○	○	○	M4
VP20Q④	○	○	○	M6①	VP20Q④-M6⑧	○	○	○	○	M6
VP30Q④	○	○	○		VP30Q④-M6⑧	○	○	○	○	



Sponge series, Pad rubber alone

P.656



Sponge series, Pad & screw set

P.656

○: Available as standard item ④ Pad rubber material C S Chloroprene Silicone				Connection config. code	○: Available as standard item ④ Pad rubber material ⑧ C S -S3 Chloroprene Silicone -S3 spec.				Connection config. code
Model code					Model code				
VP10S④	○	○		M8④①	VP10S④-M6⑧	○	○		M8
VP15S④	○	○			VP15S④-M6⑧	○	○		
VP20S④	○	○			VP20S④-M6⑧	○	○		
VP25S④	○	○			VP25S④-M6⑧	○	○		
VP30S④	○	○			VP30S④-M6⑧	○	○		
VP35S④	○	○		M10④①	VP35S④-M6⑧	○	○		M10
VP50S④	○	○			VP50S④-M6⑧	○	○		
VP70S④	○	○			VP70S④-M10	○	○	(*)	
VP100S④	○	○			VP100S④-M10	○	○	(*)	

- Notes**
- *1. A pad screw is required to mount on the holder. If you do not have a pad screw, please select from the Pad & screw set.
- *2. A Flexible Swing Joint is required to mount on the holder. If you do not have a Flexible Swing Joint, please select from the Mark-free series, with Flexible Swing Joint set.
- *3. For Pad & screw set of Sponge series 70 mm and 100 mm pad dia., the standard spec. is equivalent to "-S3" spec.

CAD data is available at PISCO website.

Packaging specifications 1 pc./bag

Options
⑤ : Surface treatment
⑧ : -S3 ⇒ -S3 spec.

Holders with the same "connection configuration code" (E10, E20, etc.) can be connected. For connectable holders, please see the page of Pad holder only (page 384-).

Oval series, Pad rubber alone												
Model code	○: Available as standard item											
	④ Pad rubber material											
	N	S	U	F	SE	NE	HN	EP				
VP2×4E④⑤	○	○	○	○	○	○	○	○				
VP3.5×7E④⑤	○	○	○	○	○	○	○	○				
VP4×10E④⑤	○	○	○	○	○	○	○	○				
VP4×20E④⑤	○	○	○	○	○	○	○	○				
VP4×30E④⑤	○	○	○	○	○	○	○	○				
VP5×10E④⑤	○	○	○	○	○	○	○	○				
VP5×20E④⑤	○	○	○	○	○	○	○	○				
VP5×30E④⑤	○	○	○	○	○	○	○	○				
VP6×10E④⑤	○	○	○	○	○	○	○	○				
VP6×20E④⑤	○	○	○	○	○	○	○	○				
VP6×30E④⑤	○	○	○	○	○	○	○	○				
VP8×20E④⑤	○	○	○	○	○	○	○	○				
VP8×30E④⑤	○	○	○	○	○	○	○	○				

Oval series, Pad & screw set												
Model code	○: Available as standard item											
	④ Pad rubber material											
	N	S	U	F	SE	NE	HN	EP	-S3			
VP2×4E④⑤-M6⑧	○	○	○	○	○	○	○	○	○			
VP3.5×7E④⑤-M6⑧	○	○	○	○	○	○	○	○	○			
VP4×10E④⑤-M6⑧	○	○	○	○	○	○	○	○	○			
VP4×20E④⑤-M6⑧	○	○	○	○	○	○	○	○	○			
VP4×30E④⑤-M6⑧	○	○	○	○	○	○	○	○	○			
VP5×10E④⑤-M6⑧	○	○	○	○	○	○	○	○	○			
VP5×20E④⑤-M6⑧	○	○	○	○	○	○	○	○	○			
VP5×30E④⑤-M6⑧	○	○	○	○	○	○	○	○	○			
VP6×10E④⑤-M6⑧	○	○	○	○	○	○	○	○	○			
VP6×20E④⑤-M6⑧	○	○	○	○	○	○	○	○	○			
VP6×30E④⑤-M6⑧	○	○	○	○	○	○	○	○	○			
VP8×20E④⑤-M6⑧	○	○	○	○	○	○	○	○	○			
VP8×30E④⑤-M6⑧	○	○	○	○	○	○	○	○	○			


- Notes**
- *A pad screw is required to mount on the holder. If you do not have a pad screw, please select from the Pad & screw set.
- CAD data is available at PISCO website.
- Packaging specifications 1 pc./bag
- Options
⑤ : Surface treatment
⑧ : -S3 ⇒ -S3 spec.

Available pad size and material for surface treatment (Oval series)


Pad dia. (mm)	⑤ Surface treatment code		
	-DL	-ER	-FG
2×4	○	○	○
3.5×7	○	○	○
4×10	○	○	○
4×20	○	○	○
4×30	○	○	○
5×10	○	○	○
5×20	○	○	○
5×30	○	○	○
6×10	○	○	○
6×20	○	○	○
6×30	○	○	○
8×20	○	○	○
8×30	○	○	○
Material	S, F, SE	N, NE	S, SE

Vacuum Pad Configuration


Pad dia. : $\phi 0.7, \phi 1, \phi 1.5, \phi 2, \phi 3, \phi 4$ mm

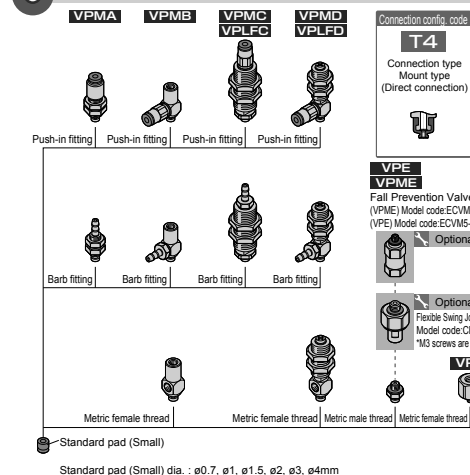



Pad dia. : $\phi 1, \phi 2, \phi 3, \phi 4$ mm

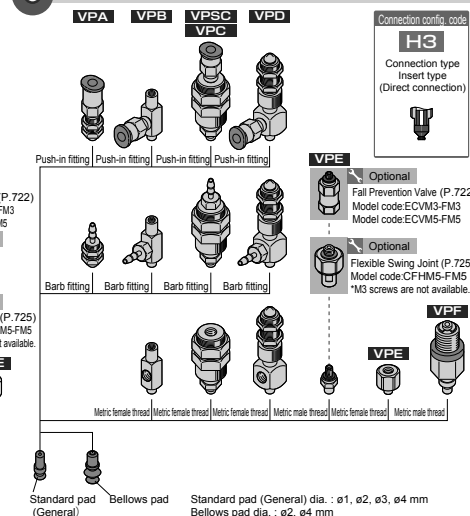

Pad dia. : $\phi 6, \phi 8, \phi 10, \phi 15, \phi 20$ mm



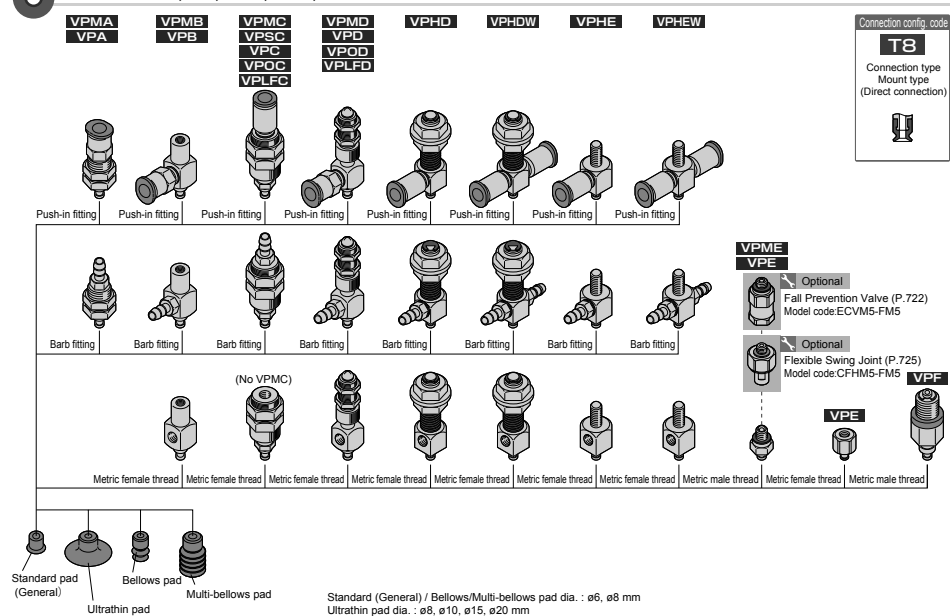


Pad dia. : $\phi 4, \phi 6, \phi 8, \phi 10, \phi 15$ mm


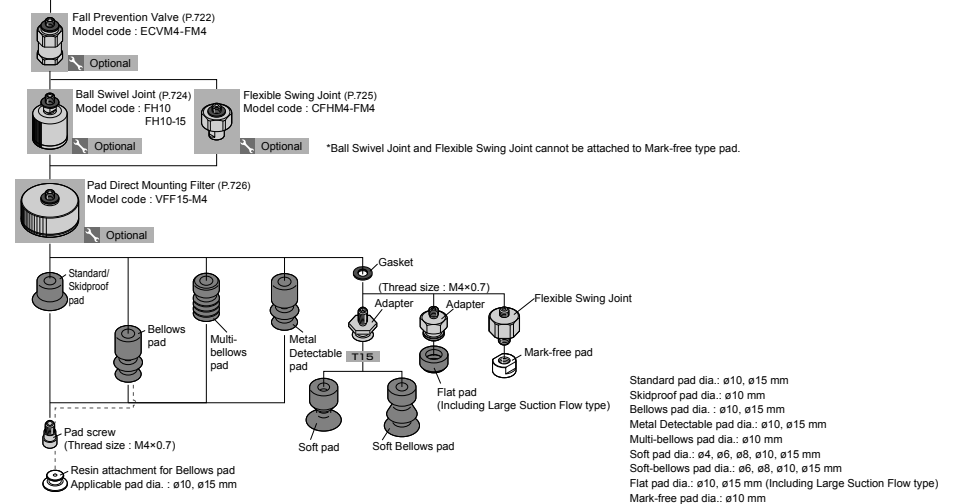
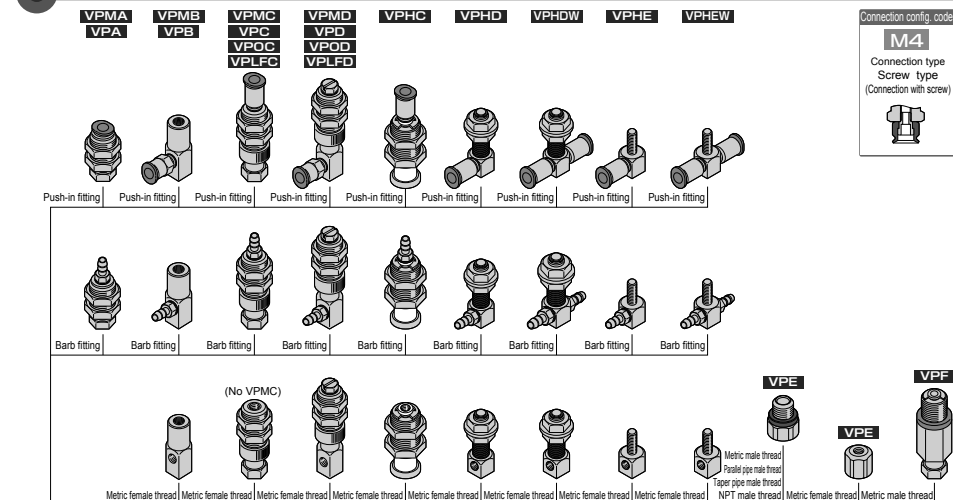


Vacuum Pad Configuration




Pad dia. : $\varnothing 10$, $\varnothing 15$, $\varnothing 20$, $\varnothing 25$, $\varnothing 30$, $\varnothing 35$, $\varnothing 40$, $\varnothing 50$ mm

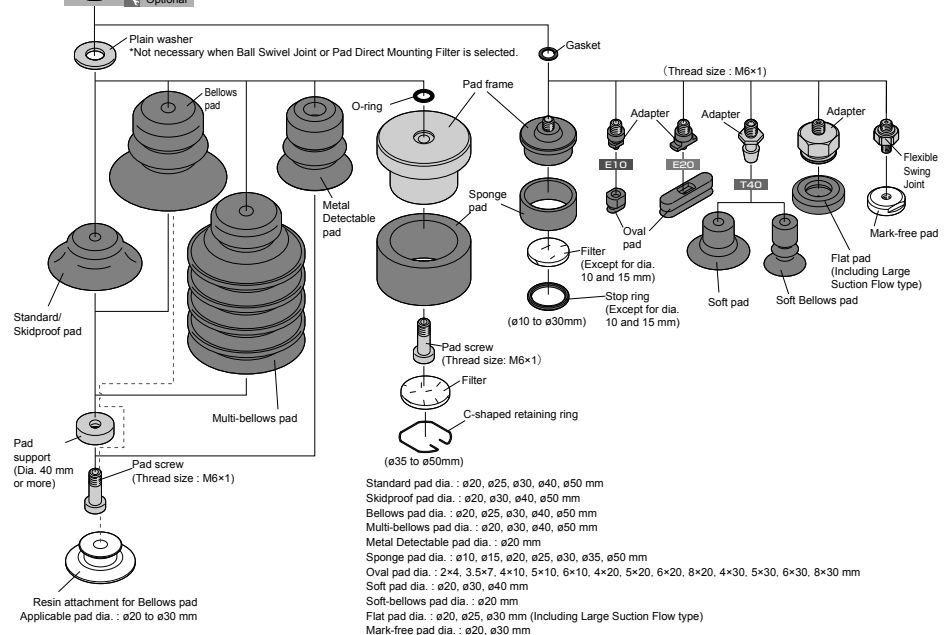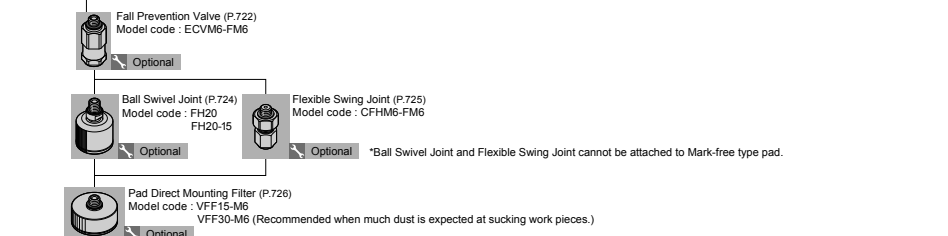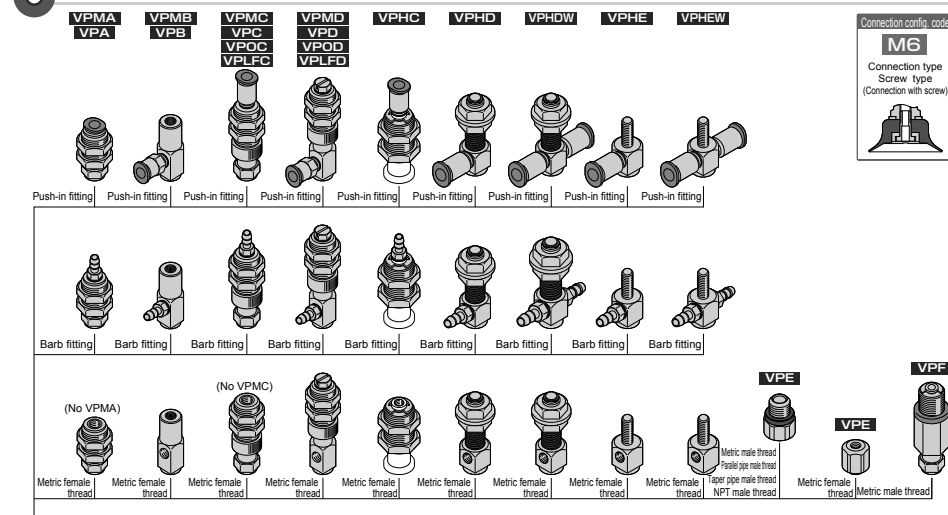

Pad dia. : $\varnothing 60$, $\varnothing 70$, $\varnothing 80$, $\varnothing 100$ mm

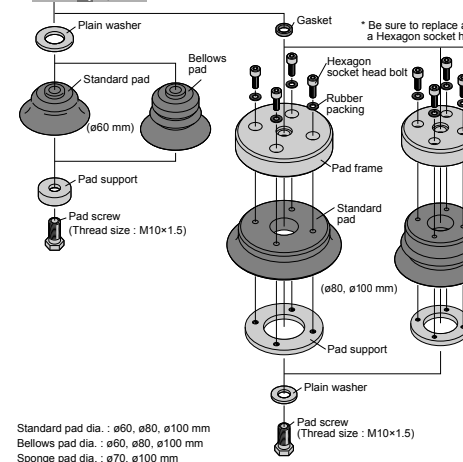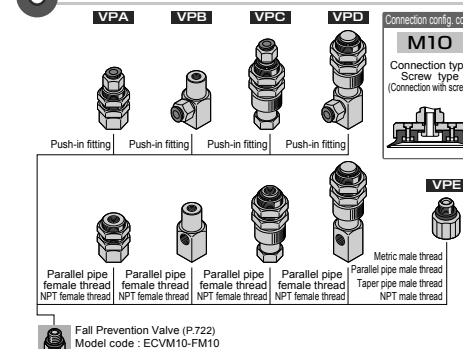


Pad dia. : $\varnothing 150$, $\varnothing 200$ mm

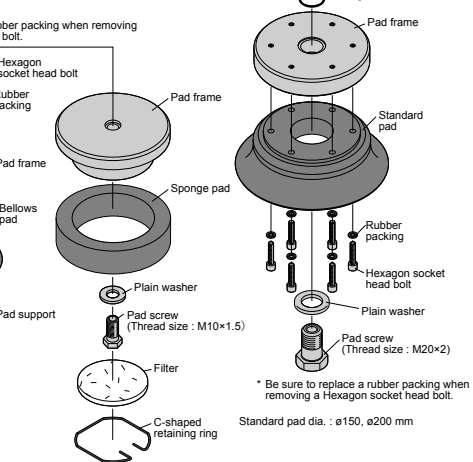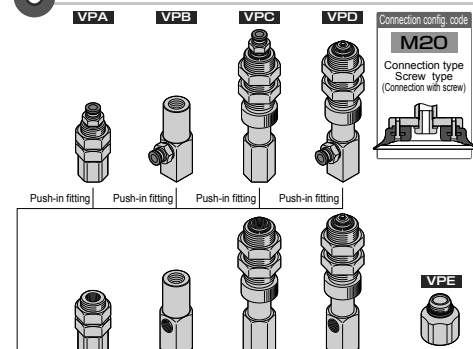


Vacuum Pad Configuration


● Pad dia. : $\varnothing 4, \varnothing 6, \varnothing 8, \varnothing 10, \varnothing 15$ mm (Exclusive to Soft and Soft Bellows type)

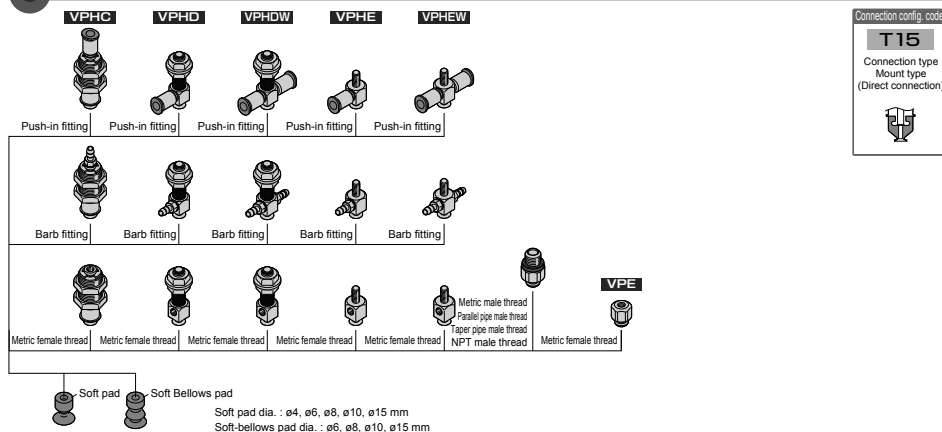


● Pad dia. : $\varnothing 20, \varnothing 30, \varnothing 40$ mm (Exclusive to Soft and Soft Bellows type)

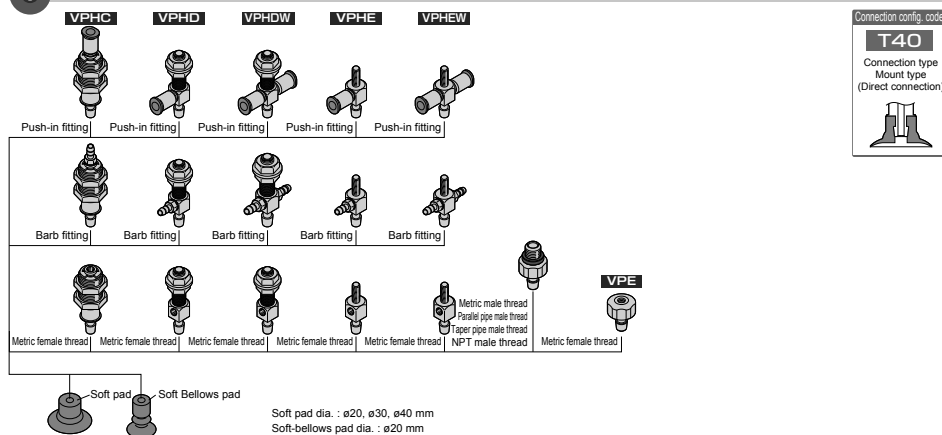


● Pad dia. : $\varnothing 20, \varnothing 25$ mm (Exclusive to Vacuum pad for packaging bag)

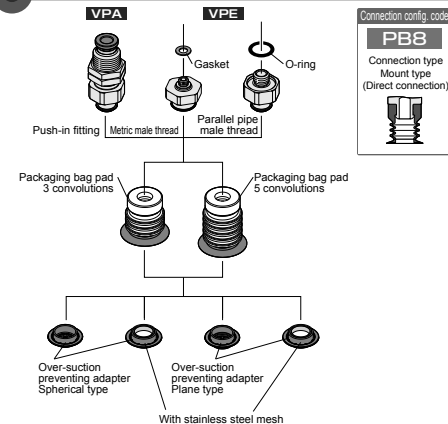

● Pad dia. : $\varnothing 30, \varnothing 40, \varnothing 50$ mm (Exclusive to Vacuum pad for packaging bag)

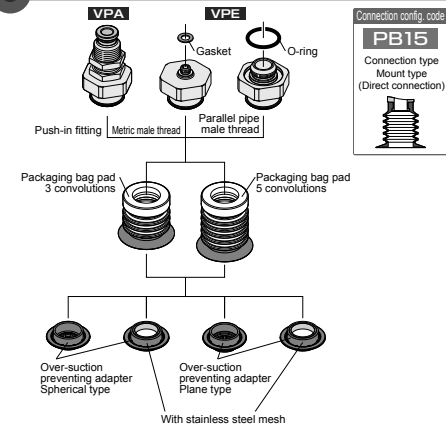

● Pad size : 2×4, 3.5×7, 4 to 6×10 mm (Exclusive to Oval type)

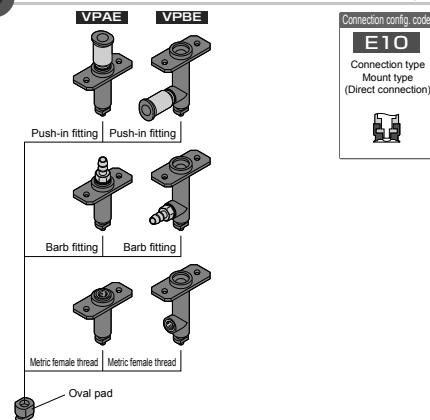

● Pad size : 4 to 8×20 mm, 4 to 8×30 mm (Exclusive to Oval type)

