

Vacuum Pad Standard Type

Vacuum pad for flat, round or small work-piece.

⚠ Safety instructions for this product
Safety instructions, Common safety instructions for each product category and Detailed safety instructions for each product are in the end of this catalog and our website.

Model Designation (Example)

VP (1)	C (2)	40 (3)	-20 (4)	R (5)	N (6)	-ER (7)	-6J (8)	-DC (9)	-ECV (10)	-FH (11)	-F30 (12)	(13)
						Optional		Optional	Optional	Optional	Optional	Optional

(1) Vacuum Pad

(2) Holder type

Holder type	Fixed type		Spring type				Holder type	Lightweight	Low profile
	Mini	Standard	Mini	Slim	Standard	No cover		Spring type	Direct mount
Code	Top port MA	A ⁽³⁾	MC	SC	C	OC	LFC	Top port HC ⁽⁴⁾	—
	Side port MB	B ⁽³⁾	MD	—	D	OD	LFD	Side port HD	HE
	Direct mount ME ⁽¹⁾	E	—	—	F ⁽²⁾	—	—	Dual side port HDW	HEW
Connection config. code	T4 T8 M4 M6	T4 T8 H3 T8 M4 M6 M10 M20	T4 T8 H3 T8 M4 M6 M10 M20	H3 T8 M4 M6 M10 M20	H3 T8 M4 M6 M10 M20	T8 T4 T8 M4 M6 M10 M20	T8 T4 T8 M4 M6 M10 M20	T8 T4 T8 M4 M6 M10 M20	T8 T4 T8 M4 M6 M10 M20

*1. ME holder is available only for configuration code: T4 and T8.

*2. F holder is available only for configuration code: H3, T8, M4 and M6.

*3. Configuration code: T4 is not available for A and B holder.

*4. Configuration code: T8 is not available for HC holder.

(3) Pad dia. (○: Available)

Code	0.7	1	1.5	2	3	4	6	8	10	15	20	25	30	40	50	60	80	100	150	200
Pad dia. (mm)	ø0.7	ø1	ø1.5	ø2	ø3	ø4	ø6	ø8	ø10	ø15	ø20	ø25	ø30	ø40	ø50	ø60	ø80	ø100	ø150	ø200
Pad type	Small	General	Deep	T4	H3	T8	M4	M6	M10	M20										

(4) Stroke (No code entry for Holder type: MA, A, MB, B, ME, E, F, HE, HEW)

Code	-2	-3	-4	-5	-6	-10	-15	-20	-25	-30	-40	-50
Stroke (mm)	2	3	4	5	6	10	15	20	25	30	40	50
Spring type holder code	VPMB	VPSC	VPC	VPOC	VPLFC	VPMD	VPD	VPOD	VPLFD	VPHC	VPHD	VPHDW

Connection config. code
● : H3
● : T4
● : T8
● : M4
● : M6
● : M10
● : M20

(5) Pad type

R: General **A**: Deep **RM**: Small

(6) Pad material (○: Available)

Code	N	S	U	F	SE	NE	G	HN	EP
Rubber material	Nitrile	Silicone	Urethane	Fluoro	Conductive Silicone	Conductive NBR (Low resistance)	Food Sanit. Act compliant NBR	HNBR	EPDM
Pad type	Small	General	Deep						

*1. The Conductive Silicone rubber (SE) is a silicon rubber capable of releasing static electricity. (Volume resistance: More than 200 Ω·cm and 1×10¹⁰ Ω·cm or less)

*2. Nitrile rubber (N), Conductive NBR (Low resistance, Volume resistance: 200 Ω·cm or less) (NE), Food Sanit. Act compliant NBR (G) are not suitable for use with ozone environment.

*3. Pad dia. 60mm or larger is not available for Food Sanit. Act compliant NBR (G).

*4. Only pad dia. 15 to 50 mm are available for Conductive Silicone rubber (SE) of deep type.

(7) Pad surface treatment for suction mark-free

Code	No code	-NF	-SF	-DL	-ER	-FG
Surface treatment	None	Fiber surface Nylon	Silk	DLC coating	Reformed surface	Fluoro-coating
Applicable pad material	—	Silicone (S), Fluoro (F)	Silicone (S), Fluoro (F)	Silicone (S), Fluoro (F), Conductive Silicone (SE)	Nitrile (N), Conductive NBR (Low resistance) (NE)	Silicone (S), Conductive Silicone (SE)
Applicable pad dia.	Small	—	—	—	ø0.7 to ø4 mm	ø0.7 to ø4 mm
	General	—	—	—	ø6 to ø60 mm	ø6 to ø200 mm
	Deep	—	—	—	ø15 to ø60 mm	ø15 to ø100 mm

*Configuration code: H3 and M20 are not available for surface treatment.

Please refer to page 370 for the details of each pad surface type and treatment for Suction Mark-free.

(8) Vacuum port size and joint type (No code entry for Holder type: F)(○: Available)

Type	mm size (mm)												inch size (inch)					
Code	-180J	-2J	-3J	-4J	-6J	-8J	-10J	-12J	-18J	-5/32J	-3/16J	-1/4J	-5/16J	-3/8J	-1/2J			
Tube O.D.	ø1.8	ø2	ø3	ø4	ø6	ø8	ø10	ø12	ø1/8	ø5/32	ø3/16	ø1/4	ø5/16	ø3/8	ø1/2			
Tube I.D.																		
Thread size																		
Holder type	VPMA	VPA	VPMB	VPB	VPMC	VPSC	VPC	VPOC	VPLFC	VPMD	VPD	VPOD	VPLFD	VPHC	VPHD	VPHDW	VPHE	VPHEW

Type	Barb fitting			Female thread					
Code	-3B	-4B*	-6B	-1/4B	-M3	-M5	-M6	-G1	-G2
Tube O.D.	ø2	ø2.5	ø4	Polyurethane tube ø0.163 Nylon tube ø0.180					
Thread size					M3×0.5	M5×0.8	M6×1	G1/8	G1/4
Holder type	VPMA	VPA	VPMB	VPB	VPMC	VPSC	VPC	VPOC	VPLFC
	VPMD	VPD	VPOD	VPLFD	VPHC	VPHD	VPHDW	VPHE	VPHEW

*The barb fitting of 5/32" size is common with 4 mm size. Please order with the code: -4B.

Type	Metric thread						Taper pipe thread				Parallel pipe thread			
Code	-M3	-M5	-M8	-M10	-M12	-M14	-R1	-R2	-R3	-R4	-G1	-G2	-G3	-G4
Thread size	M3×0.5	M5×0.8	M8×1.25	M10×1.5	M12×1.75	M14×2	R1/8	R1/4	R3/8	R1/2	G1/8	G1/4	G3/8	G1/2
Holder type	VPME	VPE												
Type	Male thread						Female thread							
Code	-N1	-N2	-N3	-N4	-FM5	-FM8								
Thread size	NPT1/8	NPT1/4	NPT3/8	NPT1/2	M5×0.8	M8×1.25								
Holder type	VPME	VPE												

*Available port size varies depending on pad dia. See model code lists on the following pages.

(9) Dust Catcher (Holder type: SC, C, D and F only)

Code	No code	-DC
Dust Catcher	None	Installed

*Note that the holder stroke becomes shorter when a dust catcher is installed. Please visit our website for details.

Optional



(10) Fall Prevention Valve

Optional

Code	No code	-ECV
Fall Prevention Valve	None	Installed

Applicable connection type	—	Configuration code: M4, M6, M10 M3, M5 thread size of VPME, VPE holder
----------------------------	---	---

*1. -S3 spec. is not selectable when Fall Prevention Valve is selected.
*2. Fall prevention valve cannot be installed when selecting fiber surface type (-SF, -NF) for surface treatment.




(11) Swivel Joint for vacuum pad

Optional

Code	No code	-FH	-FHH	-CFH
Option	None	Ball Swivel Joint (Swivel angle: 30°)	Ball Swivel Joint (Swivel angle: 15°)	Flexible Swing Joint (Swing angle: 8°)
Applicable connection type	—	Configuration code: M4, M6, M10 M5 thread size of VPME, VPE holder		

*S3 spec. is not selectable when Ball Swivel Joint is selected.



(12) Filter

Optional

Code	No code	-F15	-F30
Filter	None	Installed (Filter area 1.7 cm ²)	Installed (Filter area 7 cm ²)
Applicable config. code	—	M4, M6	M6

*1. -S3 spec. is not selectable when Filter is selected.
2. -F30 is recommended when much dust is expected at sucking work pieces.



(13) -S3 spec.

Optional

Code	No code	-S3
Metal material	Standard	No copper-based metallic materials used in flow paths.
Seal rubber material	Standard	HNBR or FKM
Release ring color	Black	Dark blue

*1. -S3 spec. is not available for following fittings and holders;
-Push-in fitting with dia. size of 1.8, 2, 3 mm and inch sizes except dia. 1/8" (some) and 5/32"
-Barb fitting: dia. 1/4".
-Pad holder with stroke length 10 mm or longer (except for pad dia. 60 mm or larger and VPHC holders).
-VPLFC and VPLFD holders.
2. For inch size push-in fitting, the release ring color is white even for -S3 spec.


(9) Spring load (Holder type: LFC only)

Code	No code	-SF1/4
Load	Standard load	Low load (1/4 of standard load)

** -SF1/4* is not selectable when 2 mm stroke is selected.

Characteristics

3 types of pads are available: general type suitable for thick and flat work-piece, deep type for round work-piece such as fruits (apple, etc.) or ball, and small type for small work-piece such as semiconductor components.

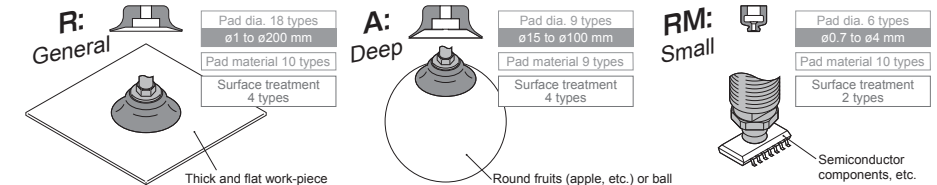

NBR (G) and Silicone (S) are Food Sanitation Act compliant.

(Holder is not compliant. Vacuum pad complies only at work-piece contact area.) *See page 6 for the details of the Food Sanitation Act.

Wide variations of Pad holders.

The following combinations of holder and pad rubber are also available although they are not listed on the model code list from the next page onward. Contact us for the details.

- Lightweight VPHC holder is made of resin and aluminum.
- Lightweight VPHD and VPHDW holders with spring type without cover.
- VPHE and VPHEW holders with reduced height.
- VPHEW and VPHEW holders with dual side vacuum ports are suitable for piping connection of multiple vacuum pads.



Low dust emission holders (VPLFC, VPLFD) with low noise and less wear from sliding are available to prevent dust generation.

VPLFC holder with top port has a separate shaft on the pad side and the vacuum port side, so there is no effect on the stroke caused by the tension of the tube. Low load type is also available to suppress impact when contacting the work-piece.

Wide variations of fixed type direct mount holder (VPE) for various thread sizes.

Metric male threads, metric female threads, taper pipe threads and parallel pipe threads are available.

*Only a part of the combinations are shown on the model code list from the next page onward. Contact us for the details.

Pad surface treatment for suction mark-free (Optional)

NEW Fluoro-coating type is added to the pad rubber surface treatment option to prevent tracing marks.

- Fiber surface type: Fiber (nylon or silk) on the pad surface prevents rubber material transfer by not directly touching the work-piece.
- DLC coating type: Slippery special coating. Effective for sticking prevention of lightweight or thin work-piece.
- Reformed surface type: Reduces tracing marks by surface reformation of nitrile rubber with chemicals.
- Fluoro-coating type: Surface reformation by special treatment prevents sticking to work-pieces. Improved pad durability and wear resistance.

Holder with dust catcher (Optional)

Collects wear debris generated by sliding spring type holders. Low-cost, simple holder with receiver tray.

Applicable to VPSC, VPC, VPD and VPF holders.



Accessories (Optional)

Fall Prevention Valve, Swivel (Ball Swivel Joint, Flexible Swing Joint) and Filter options are selectable.

-S3 spec. (Optional)


No copper-based metallic materials used in flow paths.

The seal rubber material of the fitting is HNBR or FKM, with good ozone resistance.

Suction of Spherical Surface (Deep type pad)

Minimum diameter of suction capacity

Pad dia.	ø15	ø20	ø25	ø30	ø40	ø50	ø60	ø80	ø100
Spherical dia.	20mm	30mm	40mm	50mm	80mm	100mm	120mm	160mm	200mm



RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad dia. (mm)	Tube O.D. (mm)	Model code	13 -S3 spec.	Connection config. code	Pad dia. (mm)	Tube O.D. (mm)	Model code	13 -S3 spec.	Connection config. code
Fixed type, Top port, Push-in fitting, Mini VPMA	ø0.7	ø3	VPMA0.7RM[6]7-3J	—	T4	ø10	ø5/32	VPMA10R[6]7-4J[13]	○	M4
	ø1	ø3	VPMA1RM[6]7-3J	—		ø15	ø5/32	VPMA15R(A)[6]7-4J[13]	○	
	ø1.5	ø3	VPMA1.5RM[6]7-3J	—		ø20	ø5/32	VPMA20R(A)[6]7-4J[13]	○	
	ø2	ø3	VPMA2RM[6]7-3J	—		ø25	ø5/32	VPMA25R(A)[6]7-4J[13]	○	
	ø3	ø3	VPMA3RM[6]7-3J	—	T8	ø30	ø5/32	VPMA30R(A)[6]7-4J[13]	○	M6
	ø4	ø3	VPMA4RM[6]7-3J	—		ø40	ø5/32	VPMA40R(A)[6]7-4J[13]	○	
	ø6	ø3	VPMA6R[6]7-3J	—		ø50	ø5/32	VPMA50R(A)[6]7-4J[13]	○	
	ø8	ø3	VPMA8R[6]7-3J	—						
	ø10	ø3	VPMA10R[6]7-3J	—	M4					
		ø4	VPMA10R[6]7-4J[13]	○						
	ø15	ø3	VPMA15R(A)[6]7-3J	—						
		ø4	VPMA15R(A)[6]7-4J[13]	○						
	ø20	ø4	VPMA20R(A)[6]7-4J[13]	○	M6					
	ø25	ø4	VPMA25R(A)[6]7-4J[13]	○						
	ø30	ø4	VPMA30R(A)[6]7-4J[13]	○						
	ø40	ø4	VPMA40R(A)[6]7-4J[13]	○						
	ø50	ø4	VPMA50R(A)[6]7-4J[13]	○						

- Notes**
- *1. Deep type pad can be selected for the models with pad type code: R (A) in the model code. Please select "R" for general type and "A" for deep type pad.
- *2. Holders are also available in Push-in fitting type (limited to pad dia. 8 mm or smaller) for tube O.D. of 1.8 mm and 2 mm, and barb fitting type. Contact us for the details.

CAD data is available at PISCO website.

Packaging specifications 1 pc./bag

- Options**
- [7]: Surface treatment (Fiber surface, DLC. coating, Reformed surface, and Fluoro-coating)
13: -S3 ⇒ -S3 spec. (○ in the lists: Available)
- *1. For "-S3 spec.", the release ring color is dark blue, and the gasket material is FKM+SUS316.
*2. For inch size push-in fitting, the release ring color is white even for "-S3 spec."



RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad dia. (mm)	Tube O.D. (mm)	Model code	13 -S3 spec.	Connection config. code	Pad dia. (mm)	Tube O.D. (mm)	Model code	13 -S3 spec.	Connection config. code
Fixed type, Top port, Push-in fitting, Standard VPA	ø1	ø4	VPA1R[6]7-4J[13]	○	H3	ø1	ø5/32	VPA1R[6]7-4J[13]	○	H3
	ø2	ø4	VPA2R[6]7-4J[13]	○		ø2	ø5/32	VPA2R[6]7-4J[13]	○	
	ø3	ø4	VPA3R[6]7-4J[13]	○		ø3	ø5/32	VPA3R[6]7-4J[13]	○	
	ø4	ø4	VPA4R[6]7-4J[13]	○		ø4	ø5/32	VPA4R[6]7-4J[13]	○	
	ø6	ø4	VPA6R[6]7-4J[13]	○	T8	ø6	ø5/32	VPA6R[6]7-4J[13]	○	T8
	ø8	ø4	VPA8R[6]7-4J[13]	○		ø8	ø5/32	VPA8R[6]7-4J[13]	○	
	ø10	ø6	VPA10R[6]7-6J[13]	○		ø10	ø1/4	VPA10R[6]7-1/4J	—	
	ø15	ø6	VPA15R(A)[6]7-6J[13]	○		ø15	ø1/4	VPA15R(A)[6]7-1/4J	—	
	ø20	ø3	VPA20R(A)[6]7-3J	—	M4	ø20	ø1/8	VPA20R(A)[6]7-1/8J	—	M4
	ø20	ø4	VPA20R(A)[6]7-4J[13]	○		ø20	ø5/32	VPA20R(A)[6]7-5/32J	○	
	ø20	ø6	VPA20R(A)[6]7-6J[13]	○		ø20	ø1/4	VPA20R(A)[6]7-1/4J	—	
	ø20	ø3	VPA25R(A)[6]7-3J	—		ø20	ø1/8	VPA25R(A)[6]7-1/8J	—	
	ø25	ø4	VPA25R(A)[6]7-4J[13]	○	M6	ø25	ø5/32	VPA25R(A)[6]7-5/32J	○	M6
	ø25	ø6	VPA25R(A)[6]7-6J[13]	○		ø25	ø1/4	VPA25R(A)[6]7-1/4J	—	
	ø30	ø3	VPA30R(A)[6]7-3J	—		ø30	ø1/8	VPA30R(A)[6]7-1/8J	—	
	ø30	ø4	VPA30R(A)[6]7-4J[13]	○		ø30	ø5/32	VPA30R(A)[6]7-5/32J	○	
	ø30	ø6	VPA30R(A)[6]7-6J[13]	○	M10	ø30	ø1/4	VPA30R(A)[6]7-1/4J	—	M10
	ø40	ø3	VPA40R(A)[6]7-3J	—		ø40	ø1/8	VPA40R(A)[6]7-1/8J	—	
	ø40	ø4	VPA40R(A)[6]7-4J[13]	○		ø40	ø5/32	VPA40R(A)[6]7-5/32J	○	
	ø40	ø6	VPA40R(A)[6]7-6J[13]	○		ø40	ø1/4	VPA40R(A)[6]7-1/4J	—	
	ø50	ø4	VPA50R(A)[6]7-4J[13]	○	M10	ø50	ø5/32	VPA50R(A)[6]7-5/32J	○	M10
	ø50	ø6	VPA50R(A)[6]7-6J[13]	○		ø50	ø1/4	VPA50R(A)[6]7-1/4J	—	
	ø60	ø4	VPA60R(A)[6]7-4J[13]	○		ø60	ø1/8	VPA60R(A)[6]7-1/8J	—	
	ø60	ø6	VPA60R(A)[6]7-6J[13]	○		ø60	ø5/32	VPA60R(A)[6]7-5/32J	○	
	ø80	ø4	VPA80R(A)[6]7-4J[13]	○	M10	ø80	ø3/16	VPA80R(A)[6]7-3/16J	—	M10
	ø80	ø6	VPA80R(A)[6]7-6J[13]	○		ø80	ø1/4	VPA80R(A)[6]7-1/4J	—	
	ø80	ø8	VPA80R(A)[6]7-8J[13]	○		ø80	ø5/16	VPA80R(A)[6]7-5/16J	—	
	ø80	ø10	VPA80R(A)[6]7-10J[13]	○		ø80	ø3/8	VPA80R(A)[6]7-3/8J	—	
	ø100	ø4	VPA100R(A)[6]7-4J[13]	○	M20	ø100	ø1/8	VPA100R(A)[6]7-1/8J	—	M20
	ø100	ø6	VPA100R(A)[6]7-6J[13]	○		ø100	ø5/32	VPA100R(A)[6]7-5/32J	○	
	ø100	ø8	VPA100R(A)[6]7-8J[13]	○		ø100	ø3/16	VPA100R(A)[6]7-3/16J	—	
	ø100	ø10	VPA100R(A)[6]7-10J[13]	○		ø100	ø1/4	VPA100R(A)[6]7-1/4J	—	
	ø150	ø10	VPA150R[6]7-10J[13]	○	M20	ø150	ø5/16	VPA150R[6]7-5/16J	—	M20
	ø150	ø12	VPA150R[6]7-12J[13]	○		ø150	ø3/8	VPA150R[6]7-3/8J	—	
	ø200	ø6	VPA200R[6]7-6J[13]	○		ø200	ø5/32	VPA200R[6]7-5/32J	○	
	ø200	ø8	VPA200R[6]7-8J[13]	○		ø200	ø3/16	VPA200R[6]7-3/16J	—	
	ø200	ø10	VPA200R[6]7-10J[13]	○	M10	ø200	ø1/4	VPA200R[6]7-1/4J	—	M10
	ø200	ø12	VPA200R[6]7-12J[13]	○		ø200	ø5/16	VPA200R[6]7-5/16J	—	
	ø200	ø10	VPA200R[6]7-10J[13]	○		ø200	ø3/8	VPA200R[6]7-3/8J	—	
	ø200	ø12	VPA200R[6]7-12J[13]	○		ø200	ø1/2	VPA200R[6]7-1/2J	—	
Fixed type, Top port, Female thread, Standard VPA	ø20	M6×1	VPA20R(A)[6]7-M6[13]	○	M6	ø150	ø1/8	VPA150R[6]7-1/8J	—	M20
	ø25	M6×1	VPA25R(A)[6]7-M6[13]	○		ø150	ø5/32	VPA150R[6]7-5/32J	○	
	ø30	M6×1	VPA30R(A)[6]7-M6[13]	○		ø150	ø3/16	VPA150R[6]7-3/16J	—	
	ø40	M6×1	VPA40R(A)[6]7-M6[13]	○		ø150	ø1/4	VPA150R[6]7-1/4J	—	
	ø50	M6×1	VPA50R(A)[6]7-M6[13]	○	M10	ø200	ø5/16	VPA200R[6]7-5/16J	—	M20
	ø60	G1/8	VPA60R(A)[6]7-G1/8[13]	○		ø200	ø3/8	VPA200R[6]7-3/8J	—	
	ø80	G1/8	VPA80R(A)[6]7-G1/8[13]	○		ø200	ø1/2	VPA200R[6]7-1/2J	—	
	ø100	G1/8	VPA100R(A)[6]7-G1/8[13]	○		ø200	ø1/4	VPA200R[6]7-1/4J	—	
	ø150	G1/4	VPA150R[6]7-G1/4[13]	○	M20	ø200	ø5/16	VPA200R[6]7-5/16J	—	M20
	ø200	G1/4	VPA200R[6]7-G1/4[13]	○		ø200	ø3/8	VPA200R[6]7-3/8J	—	
	ø60	NPT1/8	VPA60R(A)[6]7-N1	—		ø200	ø1/2	VPA200R[6]7-1/2J	—	
	ø80	NPT1/8	VPA80R(A)[6]7-N1	—		ø200	ø1/2	VPA200R[6]7-1/2J	—	
	ø100	NPT1/8	VPA100R(A)[6]7-N1	—	M20	ø200	ø1/2	VPA200R[6]7-1/2J	—	M20
	ø150	NPT1/4	VPA150R(A)[6]7-N2	—		ø200	ø1/2	VPA200R[6]7-1/2J	—	
	ø200	NPT1/4	VPA200R(A)[6]7-N2	—		ø200	ø1/2	VPA200R[6]7-1/2J	—	
	ø200	NPT1/4	VPA200R(A)[6]7-N2	—		ø200	ø1/2	VPA200R[6]7-1/2J	—	

- Notes**
- *1. Deep type pad can be selected for the models with pad type code: R (A) in the model code. Please select "R" for general type and "A" for deep type pad.
- *2. Pad material code: SE of pad dia. 60 mm or larger are not available for Deep type pad.
- *3. Food Sanit. Act-compliant NBR (G) is not available.
- *4. Barb fitting type holders (limited to pad dia. 50 mm or smaller) are also available. Contact us for the details.
- CAD data is available at PISCO website.
- Packaging specifications 1 pc./bag
- Options**
- [7]: Surface treatment (Fiber surface, DLC. coating, Reformed surface, and Fluoro-coating)
13: -S3 ⇒ -S3 spec. (○ in the lists: Available)
- *1. For "-S3 spec.", the release ring color is dark blue, and the gasket material is FKM+SUS316.
*2. For inch size push-in fitting, the release ring color is white even for "-S3 spec."



RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad dia. (mm)	Tube O.D. (mm)	Model code	13 -S3 -S3 spec.	Connection config. code	Pad dia. (mm)	Tube O.D. (mm)	Model code	13 -S3 -S3 spec.	Connection config. code
Fixed type, Side port, Push-in fitting, Mini VPMB	ø0.7	ø3	VPMB0.7RM(6)7-3J	—	T4	ø0.7	ø1/8	VPMB0.7RM(6)7-1/8J13	○	T4
		ø4	VPMB0.7RM(6)7-4J13	○			ø5/32	VPMB0.7RM(6)7-5/32J13	○	
	ø1	ø3	VPMB1RM(6)7-3J	—		ø1	ø1/8	VPMB1RM(6)7-1/8J13	○	
		ø4	VPMB1RM(6)7-4J13	○			ø5/32	VPMB1RM(6)7-5/32J13	○	
	ø1.5	ø3	VPMB1.5RM(6)7-3J	—		ø1.5	ø1/8	VPMB1.5RM(6)7-1/8J13	○	
		ø4	VPMB1.5RM(6)7-4J13	○			ø5/32	VPMB1.5RM(6)7-5/32J13	○	
	ø2	ø3	VPMB2RM(6)7-3J	—		ø2	ø1/8	VPMB2RM(6)7-1/8J13	○	
		ø4	VPMB2RM(6)7-4J13	○			ø5/32	VPMB2RM(6)7-5/32J13	○	
	ø3	ø3	VPMB3RM(6)7-3J	—		ø3	ø1/8	VPMB3RM(6)7-1/8J13	○	
		ø4	VPMB3RM(6)7-4J13	○			ø5/32	VPMB3RM(6)7-5/32J13	○	
	ø4	ø3	VPMB4RM(6)7-3J	—		ø4	ø1/8	VPMB4RM(6)7-1/8J13	○	
		ø4	VPMB4RM(6)7-4J13	○			ø5/32	VPMB4RM(6)7-5/32J13	○	
	ø6	ø3	VPMB6RM(6)7-3J	—		ø6	ø1/8	VPMB6RM(6)7-1/8J13	○	
		ø4	VPMB6RM(6)7-4J13	○			ø5/32	VPMB6RM(6)7-5/32J13	○	
	ø8	ø3	VPMB8RM(6)7-3J	—		ø8	ø1/8	VPMB8RM(6)7-1/8J13	○	
		ø4	VPMB8RM(6)7-4J13	○			ø5/32	VPMB8RM(6)7-5/32J13	○	
	ø10	ø3	VPMB10RM(6)7-3J	—		ø10	ø1/8	VPMB10RM(6)7-1/8J13	○	
		ø4	VPMB10RM(6)7-4J13	○			ø5/32	VPMB10RM(6)7-5/32J13	○	
	ø15	ø6	VPMB15RM(6)7-6J13	○		ø15	ø1/4	VPMB15RM(6)7-1/4J13	○	
		ø3	VPMB15RM(6)7-3J	—			ø1/8	VPMB15RM(6)7-1/8J13	○	
	ø20	ø4	VPMB20RM(6)7-4J13	○		ø20	ø5/32	VPMB20RM(6)7-5/32J13	○	
		ø6	VPMB20RM(6)7-6J13	○			ø1/4	VPMB20RM(6)7-1/4J13	○	
	ø25	ø3	VPMB25RM(6)7-3J	—		ø25	ø1/8	VPMB25RM(6)7-1/8J13	○	
		ø4	VPMB25RM(6)7-4J13	○			ø5/32	VPMB25RM(6)7-5/32J13	○	
	ø30	ø6	VPMB30RM(6)7-6J13	○		ø30	ø1/4	VPMB30RM(6)7-1/4J13	○	
		ø3	VPMB30RM(6)7-3J	—			ø1/8	VPMB30RM(6)7-1/8J13	○	
	ø40	ø4	VPMB40RM(6)7-4J13	○		ø40	ø5/32	VPMB40RM(6)7-5/32J13	○	
		ø6	VPMB40RM(6)7-6J13	○			ø1/4	VPMB40RM(6)7-1/4J13	○	
	ø50	ø3	VPMB50RM(6)7-3J	—		ø50	ø1/8	VPMB50RM(6)7-1/8J13	○	
		ø4	VPMB50RM(6)7-4J13	○			ø5/32	VPMB50RM(6)7-5/32J13	○	
	ø6	ø6	VPMB60RM(6)7-6J13	○		ø60	ø1/4	VPMB60RM(6)7-1/4J13	○	
		ø3	VPMB60RM(6)7-3J	—			ø1/8	VPMB60RM(6)7-1/8J13	○	
Holder type	Pad dia. (mm)	Male thread size	Model code	13 -S3 -S3 spec.	Connection config. code	Pad dia. (mm)	Male thread size	Model code	13 -S3 -S3 spec.	Connection config. code
Fixed type, Side port, Female thread, Mini VPMB	ø0.7	M3×0.5	VPMB0.7RM(6)7-M313	○	T4	ø10	M5×0.8	VPMB10RM(6)7-M513	○	M4
	ø1	M3×0.5	VPMB1RM(6)7-M313	○		ø15	M5×0.8	VPMB15RM(6)7-M513	○	
	ø1.5	M3×0.5	VPMB1.5RM(6)7-M313	○		ø20	M5×0.8	VPMB20RM(6)7-M513	○	
	ø2	M3×0.5	VPMB2RM(6)7-M313	○		ø25	M5×0.8	VPMB25RM(6)7-M513	○	
	ø3	M3×0.5	VPMB3RM(6)7-M313	○		ø30	M5×0.8	VPMB30RM(6)7-M513	○	
	ø4	M3×0.5	VPMB4RM(6)7-M313	○		ø40	M5×0.8	VPMB40RM(6)7-M513	○	
	ø6	M3×0.5	VPMB6RM(6)7-M313	○		ø50	M5×0.8	VPMB50RM(6)7-M513	○	
	ø8	M3×0.5	VPMB8RM(6)7-M313	○						

- Notes**
- *1. Deep type pad can be selected for the models with pad type code: R (A) in the model code. Please select "R" for general type and "A" for deep type pad.
- *2. Holders are also available in Push-in fitting type for tube O.D. of 1.8 mm and 2 mm, and barb fitting type. Contact us for the details.

CAD data is available at PISCO website.

Packaging specifications 1 pc./bag

Options

7: Surface treatment (Fiber surface, DLC. coating, Reformed surface, and Fluoro-coating)

13 -S3 → -S3 spec. (○ in the lists: Available)

*1. For "-S3 spec.", the release ring color is dark blue, and the gasket material is FKM+SUS316.

*2. For inch size push-in fitting, the release ring color is white even for "-S3 spec."

Optional items ⇒ P.442

Surface treatment

Fall Prevention Valve

Swivel Joint for vacuum pad

Filter

RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad dia. (mm)	Tube O.D. (mm)	Model code	13 -S3 -S3 spec.	Connection config. code	Pad dia. (mm)	Tube O.D. (mm)	Model code	13 -S3 -S3 spec.	Connection config. code
Fixed type, Side port, Push-in fitting, Standard VPB	ø1	ø3	VPB1R(6)7-3J	—	H3	ø1	ø1/8	VPB1R(6)7-1/8J13	○	H3
		ø4	VPB1R(6)7-4J13	○			ø5/32	VPB1R(6)7-5/32J13	○	
	ø2	ø3	VPB2R(6)7-3J	—		ø2	ø1/8	VPB2R(6)7-1/8J13	○	
		ø4	VPB2R(6)7-4J13	○			ø5/32	VPB2R(6)7-5/32J13	○	
	ø3	ø3	VPB3R(6)7-3J	—		ø3	ø1/8	VPB3R(6)7-1/8J13	○	
		ø4	VPB3R(6)7-4J13	○			ø5/32	VPB3R(6)7-5/32J13	○	
	ø4	ø3	VPB4R(6)7-3J	—		ø4	ø1/8	VPB4R(6)7-1/8J13	○	
		ø4	VPB4R(6)7-4J13	○			ø5/32	VPB4R(6)7-5/32J13	○	
	ø6	ø3	VPB6R(6)7-3J	—		ø6	ø1/8	VPB6R(6)7-1/8J13	○	
		ø4	VPB6R(6)7-4J13	○			ø5/32	VPB6R(6)7-5/32J13	○	
	ø8	ø3	VPB8R(6)7-3J	—		ø8	ø1/4	VPB8R(6)7-1/4J13	○	
		ø4	VPB8R(6)7-4J13	○			ø1/8	VPB8R(6)7-1/8J13	○	
	ø10	ø3	VPB10R(6)7-3J	—		ø10	ø1/8	VPB10R(6)7-1/8J13	○	
		ø4	VPB10R(6)7-4J13	○			ø5/32	VPB10R(6)7-5/32J13	○	
	ø15	ø3	VPB15R(6)7-3J	—		ø15	ø1/4	VPB15R(6)7-1/4J13	○	
		ø4	VPB15R(6)7-4J13	○			ø1/8	VPB15R(6)7-1/8J13	○	
	ø20	ø3	VPB20R(6)7-3J	—		ø20	ø5/32	VPB20R(6)7-5/32J13	○	
		ø4	VPB20R(6)7-4J13	○			ø1/4	VPB20R(6)7-1/4J13	○	
	ø25	ø3	VPB25R(6)7-3J	—		ø25	ø1/8	VPB25R(6)7-1/8J13	○	
		ø4	VPB25R(6)7-4J13	○			ø5/32	VPB25R(6)7-5/32J13	○	
	ø30	ø6	VPB30R(6)7-6J13	○		ø30	ø1/4	VPB30R(6)7-1/4J13	○	
		ø3	VPB30R(6)7-3J	—			ø1/8	VPB30R(6)7-1/8J13	○	
	ø40	ø4	VPB40R(6)7-4J13	○		ø40	ø5/32	VPB40R(6)7-5/32J13	○	
		ø6	VPB40R(6)7-6J13	○			ø1/4	VPB40R(6)7-1/4J13	○	
	ø50	ø3	VPB50R(6)7-3J	—		ø50	ø1/8	VPB50R(6)7-1/8J13	○	
		ø4	VPB50R(6)7-4J13	○			ø5/32	VPB50R(6)7-5/32J13	○	
	ø60	ø4	VPB60R(6)7-4J13	○		ø60	ø1/4	VPB60R(6)7-1/4J13	○	
		ø6	VPB60R(6)7-6J13	○			ø1/8	VPB60R(6)7-1/8J13	○	
	ø80	ø4	VPB80R(6)7-4J13	○		ø80	ø5/32	VPB80R(6)7-5/32J13	○	
		ø6	VPB80R(6)7-6J13	○			ø1/4	VPB80R(6)7-1/4J13	○	
	ø100	ø6	VPB100R(6)7-6J13	○		ø100	ø3/16	VPB100R(6)7-3/16J13	○	
		ø8	VPB100R(6)7-8J13	○			ø1/4	VPB100R(6)7-1/4J13	○	
	ø150	ø6	VPB150R(6)7-6J13	○		ø150	ø5/16	VPB150R(6)7-5/16J13	○	
		ø10	VPB150R(6)7-10J13	○			ø3/16	VPB150R(6)7-3/16J13	○	
	ø200	ø6	VPB200R(6)7-6J13	○		ø200	ø1/4	VPB200R(6)7-1/4J13	○	
		ø8	VPB200R(6)7-8J13	○			ø5/16	VPB200R(6)7-5/16J13	○	
	ø200	ø10	VPB200R(6)7-10J13	○			ø3/8	VPB200R(6)7-3/8J13	○	

- Notes**
- *1. Deep type pad can be selected for the models with pad type code: R (A) in the model code. Please select "R" for general type and "A" for deep type pad.
- *2. Pad material code: SE of pad dia. 60 mm or larger are not available for Deep type pad.
- *3. Food Sanit. Act-compliant NBR (G) is not available.
- *4. Holders are also available in Push-in fitting type (limited to pad dia. 8 mm or smaller) for tube O.D. of 1.8 mm and 2 mm, and barb fitting type (limited to pad dia. 50 mm or smaller). Contact us for the details.

CAD data is available at PISCO website.

Packaging specifications 1 pc./bag

Options

7: Surface treatment (Fiber surface, DLC. coating, Reformed surface, and Fluoro-coating)

13 -S3 → -S3 spec. (○ in the lists: Available)

*1. For "-S3 spec.", the release ring color is dark blue, and the gasket material is FKM+SUS316.

*2. For inch size push-in fitting, the release ring color is white even for "-S3 spec."

Optional items ⇒ P.442

Surface treatment

Fall Prevention Valve

Swivel Joint for vacuum pad

Filter

Vacuum Pad Standard Type

RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad dia. (mm)	Male thread size	Model code	13 -S3 -S3 spec.	Connection config. code
Fixed type, Side port, Female thread, Standard VPB	ø1	M3×0.5	VPB1R(6)-M3(13)	○	H3
	ø2	M3×0.5	VPB2R(6)-M3(13)	○	
	ø3	M3×0.5	VPB3R(6)-M3(13)	○	
	ø4	M3×0.5	VPB4R(6)-M3(13)	○	
	ø6	M5×0.8	VPB6R(6)-M5(13)	○	T8
	ø8	M5×0.8	VPB8R(6)-M5(13)	○	
	ø10	M6×1	VPB10R(6)-M6(13)	○	M4
	ø15	M6×1	VPB15R(A)(6)-M6(13)	○	
	ø20	M6×1	VPB20R(A)(6)-M6(13)	○	M6
	ø25	M6×1	VPB25R(A)(6)-M6(13)	○	
VPB	ø30	M6×1	VPB30R(A)(6)-M6(13)	○	
	ø40	M6×1	VPB40R(A)(6)-M6(13)	○	
	ø50	M6×1	VPB50R(A)(6)-M6(13)	○	
	ø60	G1/8	VPB60R(A)(6)-G1(13) ²⁾	○	
	ø80	G1/8	VPB80R(A)(6)-G1(13) ²⁾	○	M10
	ø100	G1/8	VPB100R(A)(6)-G1(13) ²⁾	○	
	ø150	G1/4	VPB150R(6)-G2(13) ³⁾	○	M20
	ø200	G1/4	VPB200R(6)-G2(13) ³⁾	○	
	ø60	NPT1/8	VPB60R(A)(6)-N1 ²⁾	—	M10
	ø80	NPT1/8	VPB80R(A)(6)-N1 ²⁾	—	
	ø100	NPT1/8	VPB100R(A)(6)-N1 ²⁾	—	M20
	ø150	NPT1/4	VPB150R(6)-N2 ²⁾	—	
	ø200	NPT1/4	VPB200R(6)-N2 ²⁾	—	

- Notes**
- *1. Deep type pad can be selected for the models with pad type code: R (A) in the model code. Please select "R" for general type and "A" for deep type pad.
- *2. Pad material code: SE of pad dia. 60 mm or larger are not available for Deep type pad.
- *3. Food Sanit. Act-compliant NBR (G) is not available.

CAD data is available
at PISCO website.

Packaging specifications
1 pc./bag

Options

17: Surface treatment (Fiber surface, DLC. coating, Reformed surface, and Fluoro-coating)

13: -S3 ⇒ -S3 spec. (○ in the lists: Available)

*1. For "-S3 spec.", the release ring color is dark blue, and the gasket material is FKM+SUS316.

*2. For inch size push-in fitting, the release ring color is white even for "-S3 spec."



RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad dia. (mm)	Tube O.D. (mm)	Model code	13 -S3 -S3 spec.	Connection config. code	Pad dia. (mm)	Tube O.D. (inch)	Model code	13 -S3 -S3 spec.	Connection config. code
Spring type, Top port, Push-in fitting, Mini VPMC	ø0.7	ø3	VPMC0.7-2RM(6)-J(13)	—	T4	ø10	ø1/8	VPMC10-4R(6)-1/8(13)	—	M4
	ø1	ø3	VPMC1-2RM(6)-J(13)	—		ø5/32	ø1/8	VPMC10-4R(6)-1/8(13)	○	
	ø1.5	ø3	VPMC1.5-2RM(6)-J(13)	—		ø15	ø1/8	VPMC15-4R(A)(6)-1/8(13)	—	
	ø2	ø3	VPMC2-2RM(6)-J(13)	—		ø5/32	ø1/8	VPMC15-4R(A)(6)-1/8(13)	○	
	ø3	ø3	VPMC3-2RM(6)-J(13)	—	T8	ø20	ø1/8	VPMC20-4R(A)(6)-1/8(13)	—	M6
	ø4	ø3	VPMC4-2RM(6)-J(13)	—		ø5/32	ø1/8	VPMC20-4R(A)(6)-1/8(13)	○	
	ø6	ø3	VPMC6-2R(6)-J(13)	—		ø25	ø1/8	VPMC25-4R(A)(6)-1/8(13)	—	
	ø8	ø3	VPMC8-2R(6)-J(13)	—		ø5/32	ø1/8	VPMC25-4R(A)(6)-1/8(13)	○	
	ø10	ø3	VPMC10-4R(6)-J(13)	—	M4	ø30	ø1/8	VPMC30-4R(A)(6)-1/8(13)	—	
	ø4	ø4	VPMC10-4R(6)-J(13)	○		ø5/32	ø1/8	VPMC30-4R(A)(6)-1/8(13)	○	
	ø15	ø3	VPMC15-4R(A)(6)-J(13)	—		ø40	ø1/8	VPMC40-4R(A)(6)-1/8(13)	—	
	ø4	ø4	VPMC15-4R(A)(6)-J(13)	○		ø5/32	ø1/8	VPMC40-4R(A)(6)-1/8(13)	○	
VPMC	ø20	ø4	VPMC20-4R(A)(6)-J(13)	—	M6	ø50	ø5/32	VPMC50-4R(A)(6)-1/8(13)	—	M6
	ø4	ø4	VPMC20-4R(A)(6)-J(13)	○		ø5/32	ø5/32	VPMC50-4R(A)(6)-1/8(13)	○	
	ø25	ø3	VPMC25-4R(A)(6)-J(13)	—		ø30	ø3	VPMC30-4R(A)(6)-J(13)	—	
	ø4	ø4	VPMC25-4R(A)(6)-J(13)	○		ø40	ø3	VPMC40-4R(A)(6)-J(13)	—	
	ø30	ø3	VPMC30-4R(A)(6)-J(13)	—		ø50	ø3	VPMC50-4R(A)(6)-J(13)	—	
	ø4	ø4	VPMC30-4R(A)(6)-J(13)	○		ø50	ø4	VPMC50-4R(A)(6)-J(13)	○	
	ø40	ø3	VPMC40-4R(A)(6)-J(13)	—	M6	ø50	ø3	VPMC50-4R(A)(6)-J(13)	—	M6
	ø4	ø4	VPMC40-4R(A)(6)-J(13)	○		ø50	ø4	VPMC50-4R(A)(6)-J(13)	○	
	ø50	ø3	VPMC50-4R(A)(6)-J(13)	—		ø50	ø3	VPMC50-4R(A)(6)-J(13)	—	
	ø4	ø4	VPMC50-4R(A)(6)-J(13)	○		ø50	ø4	VPMC50-4R(A)(6)-J(13)	○	

Holder type	Pad dia. (mm)	Tube O.D. (mm)	Model code	13 -S3 -S3 spec.	Connection config. code	Pad dia. (mm)	Tube O.D. (inch)	Model code	13 -S3 -S3 spec.	Connection config. code
Spring type, Top port, Push-in fitting, Slim VPSC	ø1	ø3	VPSC1-3R(6)-J(13)	—	H3	ø1	ø1/8	VPSC1-3R(6)-1/8(13)	○	H3
	ø2	ø3	VPSC2-3R(6)-J(13)	—		ø5/32	ø1/8	VPSC2-3R(6)-1/8(13)	○	
	ø3	ø3	VPSC3-3R(6)-J(13)	—		ø2	ø1/8	VPSC2-3R(6)-1/8(13)	○	
	ø4	ø3	VPSC4-3R(6)-J(13)	—		ø5/32	ø1/8	VPSC2-3R(6)-1/8(13)	○	
	ø3	ø3	VPSC3-3R(6)-J(13)	—	T8	ø3	ø1/8	VPSC3-3R(6)-1/8(13)	○	T8
	ø4	ø3	VPSC4-3R(6)-J(13)	—		ø5/32	ø1/8	VPSC3-3R(6)-1/8(13)	○	
	ø6	ø3	VPSC6-3R(6)-J(13)	—		ø4	ø1/8	VPSC4-3R(6)-1/8(13)	○	
	ø4	ø4	VPSC4-3R(6)-J(13)	○		ø5/32	ø1/8	VPSC4-3R(6)-1/8(13)	○	
	ø8	ø3	VPSC8-3R(6)-J(13)	—	T8	ø6	ø1/8	VPSC6-3R(6)-1/8(13)	○	T8
	ø4	ø4	VPSC8-3R(6)-J(13)	○		ø5/32	ø1/8	VPSC6-3R(6)-1/8(13)	○	
VPSC	ø2	ø3	VPSC2-3R(6)-J(13)	—	H3	ø8	ø5/32	VPSC8-3R(6)-1/8(13)	○	T8
	ø3	ø3	VPSC3-3R(6)-J(13)	—		ø5/32	ø5/32	VPSC8-3R(6)-1/8(13)	○	
	ø4	ø3	VPSC4-3R(6)-J(13)	—		ø5/32	ø5/32	VPSC8-3R(6)-1/8(13)	○	
	ø6	ø3	VPSC6-3R(6)-J(13)	—		ø5/32	ø5/32	VPSC8-3R(6)-1/8(13)	○	
	ø8	ø3	VPSC8-3R(6)-J(13)	—	T8	ø5/32	ø5/32	VPSC8-3R(6)-1/8(13)	○	T8
	ø4	ø4	VPSC4-3R(6)-J(13)	○		ø5/32	ø5/32	VPSC8-3R(6)-1/8(13)	○	
	ø6	ø3	VPSC6-3R(6)-J(13)	—		ø5/32	ø5/32	VPSC8-3R(6)-1/8(13)	○	
	ø8	ø3	VPSC8-3R(6)-J(13)	—		ø5/32	ø5/32	VPSC8-3R(6)-1/8(13)	○	
	ø4	ø4	VPSC4-3R(6)-J(13)	○	T8	ø5/32	ø5/32	VPSC8-3R(6)-1/8(13)	○	T8
	ø6	ø3	VPSC6-3R(6)-J(13)	—		ø5/32	ø5/32	VPSC8-3R(6)-1/8(13)	○	

- Notes**
- *1. Deep type pad can be selected for the models with pad type code: R (A) in the model code. Please select "R" for general type and "A" for deep type pad.
- *2. Holders are also available in Push-in fitting type for tube O.D. of 1.8 mm and 2 mm, and barb fitting type. Contact us for the details.

CAD data is available
at PISCO website.

Packaging specifications
1 pc./bag

Options

17: Surface treatment (Fiber surface, DLC. coating, Reformed surface, and Fluoro-coating)

13: -DC ⇒ Holder with dust catcher

13: -S3 ⇒ -S3 spec. (○ in the lists: Available)

*1. For "-S3 spec.", the release ring color is dark blue, and the gasket material is FKM+SUS316.

*2. For inch size push-in fitting, the release ring color is white even for "-S3 spec."



RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad dia. (mm)	Stroke (mm)	Tube O.D. (mm)	Model code	13 -S3 -S3 spec.	Connection config. code	Pad dia. (mm)	Stroke (mm)	Tube O.D. (inch)	Model code	13 -S3 -S3 spec.	Connection config. code
Spring type, Top port, Push-in fitting, Standard VPC 	ø1	3	ø3	VPC1-3R[6]-3J[9]	—	—	ø1	3	ø1/8	VPC1-3R[6]-1/8J[9]	—	—
			ø4	VPC1-3R[6]-4J[9]	○	—			ø5/32	VPC1-3R[6]-5/32J[9]	○	—
			ø6	VPC1-3R[6]-6J[9]	○	—			ø1/4	VPC1-3R[6]-1/4J[9]	—	—
		10	ø3	VPC1-10R[6]-3J[9]	—	—		10	ø1/8	VPC1-10R[6]-1/8J[9]	—	—
			ø4	VPC1-10R[6]-4J[9]	—	—			ø5/32	VPC1-10R[6]-5/32J[9]	—	—
			ø6	VPC1-10R[6]-6J[9]	—	—			ø1/4	VPC1-10R[6]-1/4J[9]	—	—
		15	ø3	VPC1-15R[6]-3J[9]	—	—		15	ø1/8	VPC1-15R[6]-1/8J[9]	—	—
			ø4	VPC1-15R[6]-4J[9]	—	—			ø5/32	VPC1-15R[6]-5/32J[9]	—	—
			ø6	VPC1-15R[6]-6J[9]	—	—			ø1/4	VPC1-15R[6]-1/4J[9]	—	—
		20	ø3	VPC1-20R[6]-3J[9]	—	—		20	ø1/8	VPC1-20R[6]-1/8J[9]	—	—
			ø4	VPC1-20R[6]-4J[9]	—	—			ø5/32	VPC1-20R[6]-5/32J[9]	—	—
			ø6	VPC1-20R[6]-6J[9]	—	—			ø1/4	VPC1-20R[6]-1/4J[9]	—	—
	ø2	3	ø3	VPC2-3R[6]-3J[9]	—	—	ø2	3	ø1/8	VPC2-3R[6]-1/8J[9]	—	—
			ø4	VPC2-3R[6]-4J[9]	○	—			ø5/32	VPC2-3R[6]-5/32J[9]	○	—
			ø6	VPC2-3R[6]-6J[9]	○	—			ø1/4	VPC2-3R[6]-1/4J[9]	—	—
		10	ø3	VPC2-10R[6]-3J[9]	—	—		10	ø1/8	VPC2-10R[6]-1/8J[9]	—	—
			ø4	VPC2-10R[6]-4J[9]	—	—			ø5/32	VPC2-10R[6]-5/32J[9]	—	—
			ø6	VPC2-10R[6]-6J[9]	—	—			ø1/4	VPC2-10R[6]-1/4J[9]	—	—
		15	ø3	VPC2-15R[6]-3J[9]	—	—		15	ø1/8	VPC2-15R[6]-1/8J[9]	—	—
			ø4	VPC2-15R[6]-4J[9]	—	—			ø5/32	VPC2-15R[6]-5/32J[9]	—	—
			ø6	VPC2-15R[6]-6J[9]	—	—			ø1/4	VPC2-15R[6]-1/4J[9]	—	—
		20	ø3	VPC2-20R[6]-3J[9]	—	—		20	ø1/8	VPC2-20R[6]-1/8J[9]	—	—
			ø4	VPC2-20R[6]-4J[9]	—	—			ø5/32	VPC2-20R[6]-5/32J[9]	—	—
			ø6	VPC2-20R[6]-6J[9]	—	—			ø1/4	VPC2-20R[6]-1/4J[9]	—	—
	ø3	3	ø3	VPC3-3R[6]-3J[9]	—	—	ø3	3	ø1/8	VPC3-3R[6]-1/8J[9]	—	—
			ø4	VPC3-3R[6]-4J[9]	○	—			ø5/32	VPC3-3R[6]-5/32J[9]	○	—
			ø6	VPC3-3R[6]-6J[9]	○	—			ø1/4	VPC3-3R[6]-1/4J[9]	—	—
		10	ø3	VPC3-10R[6]-3J[9]	—	—		10	ø1/8	VPC3-10R[6]-1/8J[9]	—	—
			ø4	VPC3-10R[6]-4J[9]	—	—			ø5/32	VPC3-10R[6]-5/32J[9]	—	—
			ø6	VPC3-10R[6]-6J[9]	—	—			ø1/4	VPC3-10R[6]-1/4J[9]	—	—
		15	ø3	VPC3-15R[6]-3J[9]	—	—		15	ø1/8	VPC3-15R[6]-1/8J[9]	—	—
			ø4	VPC3-15R[6]-4J[9]	—	—			ø5/32	VPC3-15R[6]-5/32J[9]	—	—
			ø6	VPC3-15R[6]-6J[9]	—	—			ø1/4	VPC3-15R[6]-1/4J[9]	—	—
		20	ø3	VPC3-20R[6]-3J[9]	—	—		20	ø1/8	VPC3-20R[6]-1/8J[9]	—	—
			ø4	VPC3-20R[6]-4J[9]	—	—			ø5/32	VPC3-20R[6]-5/32J[9]	—	—
			ø6	VPC3-20R[6]-6J[9]	—	—			ø1/4	VPC3-20R[6]-1/4J[9]	—	—
	ø4	3	ø3	VPC4-3R[6]-3J[9]	—	—	ø4	3	ø1/8	VPC4-3R[6]-1/8J[9]	—	—
			ø4	VPC4-3R[6]-4J[9]	○	—			ø5/32	VPC4-3R[6]-5/32J[9]	○	—
			ø6	VPC4-3R[6]-6J[9]	○	—			ø1/4	VPC4-3R[6]-1/4J[9]	—	—
		10	ø3	VPC4-10R[6]-3J[9]	—	—		10	ø1/8	VPC4-10R[6]-1/8J[9]	—	—
			ø4	VPC4-10R[6]-4J[9]	—	—			ø5/32	VPC4-10R[6]-5/32J[9]	—	—
			ø6	VPC4-10R[6]-6J[9]	—	—			ø1/4	VPC4-10R[6]-1/4J[9]	—	—
		15	ø3	VPC4-15R[6]-3J[9]	—	—		15	ø1/8	VPC4-15R[6]-1/8J[9]	—	—
			ø4	VPC4-15R[6]-4J[9]	—	—			ø5/32	VPC4-15R[6]-5/32J[9]	—	—
			ø6	VPC4-15R[6]-6J[9]	—	—			ø1/4	VPC4-15R[6]-1/4J[9]	—	—
		20	ø3	VPC4-20R[6]-3J[9]	—	—		20	ø1/8	VPC4-20R[6]-1/8J[9]	—	—
			ø4	VPC4-20R[6]-4J[9]	—	—			ø5/32	VPC4-20R[6]-5/32J[9]	—	—
			ø6	VPC4-20R[6]-6J[9]	—	—			ø1/4	VPC4-20R[6]-1/4J[9]	—	—

Notes
 *Holders are also available in Push-in fitting type for tube O.D. of 1.8 mm and 2 mm, and barb fitting type. Contact us for the details.

CAD
 CAD data is available
 at PISCO website.

Packaging
 specifications
 1 pc./bag

Options
 [9]: -DC ⇒ Holder with dust catcher
 [13]: -S3 ⇒ -S3 spec. (○ in the lists: Available)
 *1. For "-S3 spec.", the release ring color is dark blue, and the gasket material is FKM+SUS316.
 *2. For inch size push-in fitting, the release ring color is white even for "-S3 spec."

Optional items
 ⇒ P.442
 Dust
 Catcher
 (VPC)

RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad dia. (mm)	Stroke (mm)	Tube O.D. (mm)	Model code	TB -S3 -S3 spec.	Connection config. code	Pad dia. (mm)	Stroke (mm)	Tube O.D. (inch)	Model code	TB -S3 -S3 spec.	Connection config. code
Spring type, Top port, Push-in fitting, Standard VPC 	ø6	3	ø3	VPC6-3R[6]-3J[9]	—	TB	ø6	3	ø1/8	VPC6-3R[6]-1/8J[9]	—	TB
			ø4	VPC6-3R[6]-4J[9]	○				ø5/32	VPC6-3R[6]-5/32J[9]	○	
			ø6	VPC6-3R[6]-6J[9]	○				ø1/4	VPC6-3R[6]-1/4J[9]	—	
		10	ø3	VPC6-10R[6]-3J[9]	—			10	ø1/8	VPC6-10R[6]-1/8J[9]	—	
			ø4	VPC6-10R[6]-4J[9]	—				ø5/32	VPC6-10R[6]-5/32J[9]	—	
			ø6	VPC6-10R[6]-6J[9]	—				ø1/4	VPC6-10R[6]-1/4J[9]	—	
		15	ø3	VPC6-15R[6]-3J[9]	—			15	ø1/8	VPC6-15R[6]-1/8J[9]	—	
			ø4	VPC6-15R[6]-4J[9]	—				ø5/32	VPC6-15R[6]-5/32J[9]	—	
			ø6	VPC6-15R[6]-6J[9]	—				ø1/4	VPC6-15R[6]-1/4J[9]	—	
		20	ø3	VPC6-20R[6]-3J[9]	—			20	ø1/8	VPC6-20R[6]-1/8J[9]	—	
			ø4	VPC6-20R[6]-4J[9]	—				ø5/32	VPC6-20R[6]-5/32J[9]	—	
			ø6	VPC6-20R[6]-6J[9]	—				ø1/4	VPC6-20R[6]-1/4J[9]	—	
	ø8	3	ø3	VPC8-3R[6]-3J[9]	—	ø8	3	ø1/8	VPC8-3R[6]-1/8J[9]	—		
			ø4	VPC8-3R[6]-4J[9]	○			ø5/32	VPC8-3R[6]-5/32J[9]	○		
			ø6	VPC8-3R[6]-6J[9]	○			ø1/4	VPC8-3R[6]-1/4J[9]	—		
		10	ø3	VPC8-10R[6]-3J[9]	—		10	ø1/8	VPC8-10R[6]-1/8J[9]	—		
			ø4	VPC8-10R[6]-4J[9]	—			ø5/32	VPC8-10R[6]-5/32J[9]	—		
			ø6	VPC8-10R[6]-6J[9]	—			ø1/4	VPC8-10R[6]-1/4J[9]	—		
		15	ø3	VPC8-15R[6]-3J[9]	—		15	ø1/8	VPC8-15R[6]-1/8J[9]	—		
			ø4	VPC8-15R[6]-4J[9]	—			ø5/32	VPC8-15R[6]-5/32J[9]	—		
			ø6	VPC8-15R[6]-6J[9]	—			ø1/4	VPC8-15R[6]-1/4J[9]	—		
		20	ø3	VPC8-20R[6]-3J[9]	—		20	ø1/8	VPC8-20R[6]-1/8J[9]	—		
			ø4	VPC8-20R[6]-4J[9]	—			ø5/32	VPC8-20R[6]-5/32J[9]	—		
			ø6	VPC8-20R[6]-6J[9]	—			ø1/4	VPC8-20R[6]-1/4J[9]	—		
	ø10	6	ø3	VPC10-6R[6]-3J[9]	—	ø10	6	ø1/8	VPC10-6R[6]-1/8J[9]	—		
			ø4	VPC10-6R[6]-4J[9]	○			ø5/32	VPC10-6R[6]-5/32J[9]	○		
			ø6	VPC10-6R[6]-6J[9]	○			ø1/4	VPC10-6R[6]-1/4J[9]	—		
		10	ø3	VPC10-10R[6]-3J[9]	—		10	ø1/8	VPC10-10R[6]-1/8J[9]	—		
			ø4	VPC10-10R[6]-4J[9]	—			ø5/32	VPC10-10R[6]-5/32J[9]	—		
			ø6	VPC10-10R[6]-6J[9]	—			ø1/4	VPC10-10R[6]-1/4J[9]	—		
		15	ø3	VPC10-15R[6]-3J[9]	—		15	ø1/8	VPC10-15R[6]-1/8J[9]	—		
			ø4	VPC10-15R[6]-4J[9]	—			ø5/32	VPC10-15R[6]-5/32J[9]	—		
			ø6	VPC10-15R[6]-6J[9]	—			ø1/4	VPC10-15R[6]-1/4J[9]	—		
		20	ø3	VPC10-20R[6]-3J[9]	—		20	ø1/8	VPC10-20R[6]-1/8J[9]	—		
			ø4	VPC10-20R[6]-4J[9]	—			ø5/32	VPC10-20R[6]-5/32J[9]	—		
			ø6	VPC10-20R[6]-6J[9]	—			ø1/4	VPC10-20R[6]-1/4J[9]	—		
	ø15	6	ø3	VPC15-6R[A]-3J[9]	—	ø15	6	ø1/8	VPC15-6R[A]-1/8J[9]	—		
			ø4	VPC15-6R[A]-4J[9]	○			ø5/32	VPC15-6R[A]-5/32J[9]	○		
ø6			VPC15-6R[A]-6J[9]	○	ø1/4			VPC15-6R[A]-1/4J[9]	—			
10		ø3	VPC15-10R[A]-3J[9]	—	10		ø1/8	VPC15-10R[A]-1/8J[9]	—			
		ø4	VPC15-10R[A]-4J[9]	—			ø5/32	VPC15-10R[A]-5/32J[9]	—			
		ø6	VPC15-10R[A]-6J[9]	—			ø1/4	VPC15-10R[A]-1/4J[9]	—			
15		ø3	VPC15-15R[A]-3J[9]	—	15		ø1/8	VPC15-15R[A]-1/8J[9]	—			
		ø4	VPC15-15R[A]-4J[9]	—			ø5/32	VPC15-15R[A]-5/32J[9]	—			
		ø6	VPC15-15R[A]-6J[9]	—			ø1/4	VPC15-15R[A]-1/4J[9]	—			
20		ø3	VPC15-20R[A]-3J[9]	—	20		ø1/8	VPC15-20R[A]-1/8J[9]	—			
		ø4	VPC15-20R[A]-4J[9]	—			ø5/32	VPC15-20R[A]-5/32J[9]	—			
		ø6	VPC15-20R[A]-6J[9]	—			ø1/4	VPC15-20R[A]-1/4J[9]	—			

[illegible]

Notes

- *1. Deep type pad can be selected for the models with pad type code: R (A) in the model code. Please select "R" for general type and "A" for deep type pad.
- *2. Pad material code: SE of pad dia. 60 mm or larger are not available for Deep type pad.
- *3. Food Sanit. Act-compliant NBR (G) is not available.
- *4. Barb fitting type holders (limited to pad dia. 50 mm or smaller) are also available. Contact us for the details.



 CAD data is available
at PISCO website.



	Packaging specifications
	1 pc./1 bag

Options

7: Surface treatment (Fiber surface, DLC. coating, Reformed surface, and Fluoro-coating)

*1. For "S3 spec.", the release ring color is dark blue, and the gasket material is FKM+SUS316.
*2. For inch size push-in fitting, the release ring color is white even for "S3 spec."

Optional items
⇒ P.442

Surface treatment

Dust
Catcher
(VBC)Fall
Prevention
Value

Swivel
Joint for
use with pad



Filter



Vacuum Pad Standard Type

RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad dia. (mm)	Stroke (mm)	Male thread size	Model code	T3 -S3 -S3 spec.	Connection config. code
Spring type, Top port, Female thread, Standard VPC 	ø1	3	M5×0.8	VPC1-3R(1/8)-M5(1/8)	○	H3
		10		VPC1-10R(1/8)-M5(1/8)	—	
		15		VPC1-15R(1/8)-M5(1/8)	—	
		20		VPC1-20R(1/8)-M5(1/8)	—	
	ø2	3	M5×0.8	VPC2-3R(1/8)-M5(1/8)	○	
		10		VPC2-10R(1/8)-M5(1/8)	—	
		15		VPC2-15R(1/8)-M5(1/8)	—	
		20		VPC2-20R(1/8)-M5(1/8)	—	
	ø3	3	M5×0.8	VPC3-3R(1/8)-M5(1/8)	○	
		10		VPC3-10R(1/8)-M5(1/8)	—	
		15		VPC3-15R(1/8)-M5(1/8)	—	
		20		VPC3-20R(1/8)-M5(1/8)	—	
	ø4	3	M5×0.8	VPC4-3R(1/8)-M5(1/8)	○	
		10		VPC4-10R(1/8)-M5(1/8)	—	
		15		VPC4-15R(1/8)-M5(1/8)	—	
		20		VPC4-20R(1/8)-M5(1/8)	—	
	ø6	3	M5×0.8	VPC6-3R(1/2)-M5(1/8)	○	T8
		10		VPC6-10R(1/2)-M5(1/8)	—	
		15		VPC6-15R(1/2)-M5(1/8)	—	
		20		VPC6-20R(1/2)-M5(1/8)	—	
	ø8	3	M5×0.8	VPC8-3R(1/2)-M5(1/8)	○	
		10		VPC8-10R(1/2)-M5(1/8)	—	
		15		VPC8-15R(1/2)-M5(1/8)	—	
		20		VPC8-20R(1/2)-M5(1/8)	—	
	ø10	6	M6×1	VPC10-6R(1/2)-M6(1/8)	○	M4
		10		VPC10-10R(1/2)-M6(1/8)	—	
		15		VPC10-15R(1/2)-M6(1/8)	—	
		20		VPC10-20R(1/2)-M6(1/8)	—	
	ø15	6	M6×1	VPC15-6R(1/2)-M6(1/8)	○	
		10		VPC15-10R(1/2)-M6(1/8)	—	
		15		VPC15-15R(1/2)-M6(1/8)	—	
		20		VPC15-20R(1/2)-M6(1/8)	—	
	ø20	6	M6×1	VPC20-6R(1/2)-M6(1/8)	○	M6
		10		VPC20-10R(1/2)-M6(1/8)	—	
		15		VPC20-15R(1/2)-M6(1/8)	—	
		20		VPC20-20R(1/2)-M6(1/8)	—	
	ø25	6	M6×1	VPC25-6R(1/2)-M6(1/8)	○	
		10		VPC25-10R(1/2)-M6(1/8)	—	
		15		VPC25-15R(1/2)-M6(1/8)	—	
		20		VPC25-20R(1/2)-M6(1/8)	—	
	ø30	6	M6×1	VPC30-6R(1/2)-M6(1/8)	○	M8
		10		VPC30-10R(1/2)-M6(1/8)	—	
		15		VPC30-15R(1/2)-M6(1/8)	—	
		20		VPC30-20R(1/2)-M6(1/8)	—	
	ø40	6	M6×1	VPC40-6R(1/2)-M6(1/8)	○	
		10		VPC40-10R(1/2)-M6(1/8)	—	
		15		VPC40-15R(1/2)-M6(1/8)	—	
		20		VPC40-20R(1/2)-M6(1/8)	—	
	ø50	6	M6×1	VPC50-6R(1/2)-M6(1/8)	○	M10
		10		VPC50-10R(1/2)-M6(1/8)	—	
		15		VPC50-15R(1/2)-M6(1/8)	—	
		20		VPC50-20R(1/2)-M6(1/8)	—	
	ø60	10	G1/8	VPC60-10R(1/2)-G1/8(1/8)	○	M10
		10		VPC80-10R(1/2)-G1/8(1/8)	—	
		10		VPC100-10R(1/2)-G1/8(1/8)	—	
		10		VPC150-20R(1/2)-G2/8(1/8)	—	
	ø150	20	G1/4	VPC200-20R(1/2)-G2/8(1/8)	—	M20
		20		VPC200-20R(1/2)-G2/8(1/8)	—	
		20		VPC200-20R(1/2)-G2/8(1/8)	—	
		20		VPC200-20R(1/2)-G2/8(1/8)	—	
	ø60	10	NPT1/8	VPC60-10R(1/2)-NPT1/8	—	M10
		10		VPC80-10R(1/2)-NPT1/8	—	
		10		VPC100-10R(1/2)-NPT1/8	—	
		10		VPC150-20R(1/2)-NPT1/4	—	
	ø100	10	NPT1/8	VPC200-20R(1/2)-NPT1/8	—	M20
		10		VPC200-20R(1/2)-NPT1/8	—	
		10		VPC200-20R(1/2)-NPT1/8	—	
		10		VPC200-20R(1/2)-NPT1/8	—	
	ø150	20	NPT1/4	VPC200-20R(1/2)-NPT1/4	—	M20
		20		VPC200-20R(1/2)-NPT1/4	—	
		20		VPC200-20R(1/2)-NPT1/4	—	
		20		VPC200-20R(1/2)-NPT1/4	—	




Notes

- *1. Deep type pad can be selected for the models with pad type code: R (A) in the model code. Please select "R" for general type and "A" for deep type pad.
- *2. Pad material code: SE of pad dia. 60 mm or larger are not available for Deep type pad.
- *3. Food Sanit. Act-compliant NBR (G) is not available.



Options

- T3: Surface treatment (Fiber surface, DLC. coating, Reformed surface, and Fluoro-coating)
- 9: -DC ⇒ Holder with dust catcher
- 13: -S3 ⇒ -S3 spec. (○ in the lists: Available)
- *1. For "-S3 spec.", the release ring color is dark blue, and the gasket material is FKM+SUS316.
- *2. For inch size push-in fitting, the release ring color is white even for "-S3 spec."



RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad dia. (mm)	Stroke (mm)	Tube O.D. (mm)	Model code	Connection config. code	Pad dia. (mm)	Stroke (mm)	Tube O.D. (inch)	Model code	Connection config. code
Spring type, Top port, Push-in fitting, No cover VPOC 	ø6	20	ø3	VPOC6-20R(1/2)-J3	T8	ø6	20	ø1/8	VPOC6-20R(1/2)-1/8J	T8
			ø4	VPOC6-20R(1/2)-J4				ø5/32	VPOC6-20R(1/2)-5/32J	
			ø6	VPOC6-20R(1/2)-J6				ø1/4	VPOC6-20R(1/2)-1/4J	
		30	ø3	VPOC6-30R(1/2)-J3			30	ø1/8	VPOC6-30R(1/2)-1/8J	
			ø4	VPOC6-30R(1/2)-J4				ø5/32	VPOC6-30R(1/2)-5/32J	
			ø6	VPOC6-30R(1/2)-J6				ø1/4	VPOC6-30R(1/2)-1/4J	
		40	ø3	VPOC6-40R(1/2)-J3			40	ø1/8	VPOC6-40R(1/2)-1/8J	
			ø4	VPOC6-40R(1/2)-J4				ø5/32	VPOC6-40R(1/2)-5/32J	
			ø6	VPOC6-40R(1/2)-J6				ø1/4	VPOC6-40R(1/2)-1/4J	
		50	ø3	VPOC6-50R(1/2)-J3			50	ø1/8	VPOC6-50R(1/2)-1/8J	
			ø4	VPOC6-50R(1/2)-J4				ø5/32	VPOC6-50R(1/2)-5/32J	
			ø6	VPOC6-50R(1/2)-J6				ø1/4	VPOC6-50R(1/2)-1/4J	
	ø8	20	ø3	VPOC8-20R(1/2)-J3	T8	ø8	20	ø1/8	VPOC8-20R(1/2)-1/8J	T8
			ø4	VPOC8-20R(1/2)-J4				ø5/32	VPOC8-20R(1/2)-5/32J	
			ø6	VPOC8-20R(1/2)-J6				ø1/4	VPOC8-20R(1/2)-1/4J	
		30	ø3	VPOC8-30R(1/2)-J3			30	ø1/8	VPOC8-30R(1/2)-1/8J	
			ø4	VPOC8-30R(1/2)-J4				ø5/32	VPOC8-30R(1/2)-5/32J	
			ø6	VPOC8-30R(1/2)-J6				ø1/4	VPOC8-30R(1/2)-1/4J	
		40	ø3	VPOC8-40R(1/2)-J3			40	ø1/8	VPOC8-40R(1/2)-1/8J	
			ø4	VPOC8-40R(1/2)-J4				ø5/32	VPOC8-40R(1/2)-5/32J	
			ø6	VPOC8-40R(1/2)-J6				ø1/4	VPOC8-40R(1/2)-1/4J	
		50	ø3	VPOC8-50R(1/2)-J3			50	ø1/8	VPOC8-50R(1/2)-1/8J	
			ø4	VPOC8-50R(1/2)-J4				ø5/32	VPOC8-50R(1/2)-5/32J	
			ø6	VPOC8-50R(1/2)-J6				ø1/4	VPOC8-50R(1/2)-1/4J	
	ø10	20	ø3	VPOC10-20R(1/2)-J3	M4	ø10	20	ø1/8	VPOC10-20R(1/2)-1/8J	M4
			ø4	VPOC10-20R(1/2)-J4				ø5/32	VPOC10-20R(1/2)-5/32J	
			ø6	VPOC10-20R(1/2)-J6				ø1/4	VPOC10-20R(1/2)-1/4J	
		30	ø3	VPOC10-30R(1/2)-J3			30	ø1/8	VPOC10-30R(1/2)-1/8J	
			ø4	VPOC10-30R(1/2)-J4				ø5/32	VPOC10-30R(1/2)-5/32J	
			ø6	VPOC10-30R(1/2)-J6				ø1/4	VPOC10-30R(1/2)-1/4J	
		40	ø3	VPOC10-40R(1/2)-J3			40	ø1/8	VPOC10-40R(1/2)-1/8J	
			ø4	VPOC10-40R(1/2)-J4				ø5/32	VPOC10-40R(1/2)-5/32J	
			ø6	VPOC10-40R(1/2)-J6				ø1/4	VPOC10-40R(1/2)-1/4J	
		50	ø3	VPOC10-50R(1/2)-J3			50	ø1/8	VPOC10-50R(1/2)-1/8J	
			ø4	VPOC10-50R(1/2)-J4				ø5/32	VPOC10-50R(1/2)-5/32J	
			ø6	VPOC10-50R(1/2)-J6				ø1/4	VPOC10-50R(1/2)-1/4J	
	ø15	20	ø3	VPOC15-20R(1/2)-J3	M4	ø15	20	ø1/8	VPOC15-20R(1/2)-1/8J	M4
			ø4	VPOC15-20R(1/2)-J4				ø5/32	VPOC15-20R(1/2)-5/32J	
			ø6	VPOC15-20R(1/2)-J6				ø1/4	VPOC15-20R(1/2)-1/4J	
		30	ø3	VPOC15-30R(1/2)-J3			30	ø1/8	VPOC15-30R(1/2)-1/8J	
			ø4	VPOC15-30R(1/2)-J4				ø5/32	VPOC15-30R(1/2)-5/32J	
			ø6	VPOC15-30R(1/2)-J6				ø1/4	VPOC15-30R(1/2)-1/4J	
40		ø3	VPOC15-40R(1/2)-J3	40			ø1/8	VPOC15-40R(1/2)-1/8J		
		ø4	VPOC15-40R(1/2)-J4				ø5/32	VPOC15-40R(1/2)-5/32J		
		ø6	VPOC15-40R(1/2)-J6				ø1/4	VPOC15-40R(1/2)-1/4J		
50		ø3	VPOC15-50R(1/2)-J3	50			ø1/8	VPOC15-50R(1/2)-1/8J		
		ø4	VPOC15-50R(1/2)-J4				ø5/32	VPOC15-50R(1/2)-5/32J		
		ø6	VPOC15-50R(1/2)-J6				ø1/4	VPOC15-50R(1/2)-1/4J		

Pad dia.

ø6 mm

to

ø15 mm

Vacuum Pad Standard Type

RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad dia. (mm)	Stroke (mm)	Tube O.D. (mm)	Model code	Connection config. code	Pad dia. (mm)	Stroke (mm)	Tube O.D. (inch)	Model code	Connection config. code
Spring type, Top port, Push-in fitting, No cover VPOC  Pad dia. 	ø20	20	ø3	VPOC20-20R(A) (S17)-3J	M6	ø20	20	ø1/8	VPOC20-20R(A) (S17)-1/6J	M6
			ø4	VPOC20-20R(A) (S17)-4J				ø5/32	VPOC20-20R(A) (S17)-4/32J	
			ø6	VPOC20-20R(A) (S17)-6J				ø1/4	VPOC20-20R(A) (S17)-1/4J	
		30	ø3	VPOC20-30R(A) (S17)-3J			30	ø1/8	VPOC20-30R(A) (S17)-1/6J	
			ø4	VPOC20-30R(A) (S17)-4J				ø5/32	VPOC20-30R(A) (S17)-4/32J	
			ø6	VPOC20-30R(A) (S17)-6J				ø1/4	VPOC20-30R(A) (S17)-1/4J	
		40	ø3	VPOC20-40R(A) (S17)-3J			40	ø1/8	VPOC20-40R(A) (S17)-1/6J	
			ø4	VPOC20-40R(A) (S17)-4J				ø5/32	VPOC20-40R(A) (S17)-4/32J	
			ø6	VPOC20-40R(A) (S17)-6J				ø1/4	VPOC20-40R(A) (S17)-1/4J	
		50	ø3	VPOC20-50R(A) (S17)-3J			50	ø1/8	VPOC20-50R(A) (S17)-1/6J	
			ø4	VPOC20-50R(A) (S17)-4J				ø5/32	VPOC20-50R(A) (S17)-4/32J	
			ø6	VPOC20-50R(A) (S17)-6J				ø1/4	VPOC20-50R(A) (S17)-1/4J	
	ø25	20	ø3	VPOC25-20R(A) (S17)-3J	M6	ø25	20	ø1/8	VPOC25-20R(A) (S17)-1/6J	M6
			ø4	VPOC25-20R(A) (S17)-4J				ø5/32	VPOC25-20R(A) (S17)-4/32J	
			ø6	VPOC25-20R(A) (S17)-6J				ø1/4	VPOC25-20R(A) (S17)-1/4J	
		30	ø3	VPOC25-30R(A) (S17)-3J			30	ø1/8	VPOC25-30R(A) (S17)-1/6J	
			ø4	VPOC25-30R(A) (S17)-4J				ø5/32	VPOC25-30R(A) (S17)-4/32J	
			ø6	VPOC25-30R(A) (S17)-6J				ø1/4	VPOC25-30R(A) (S17)-1/4J	
		40	ø3	VPOC25-40R(A) (S17)-3J			40	ø1/8	VPOC25-40R(A) (S17)-1/6J	
			ø4	VPOC25-40R(A) (S17)-4J				ø5/32	VPOC25-40R(A) (S17)-4/32J	
			ø6	VPOC25-40R(A) (S17)-6J				ø1/4	VPOC25-40R(A) (S17)-1/4J	
		50	ø3	VPOC25-50R(A) (S17)-3J			50	ø1/8	VPOC25-50R(A) (S17)-1/6J	
			ø4	VPOC25-50R(A) (S17)-4J				ø5/32	VPOC25-50R(A) (S17)-4/32J	
			ø6	VPOC25-50R(A) (S17)-6J				ø1/4	VPOC25-50R(A) (S17)-1/4J	
	ø30	20	ø3	VPOC30-20R(A) (S17)-3J	M6	ø30	20	ø1/8	VPOC30-20R(A) (S17)-1/6J	M6
			ø4	VPOC30-20R(A) (S17)-4J				ø5/32	VPOC30-20R(A) (S17)-4/32J	
			ø6	VPOC30-20R(A) (S17)-6J				ø1/4	VPOC30-20R(A) (S17)-1/4J	
		30	ø3	VPOC30-30R(A) (S17)-3J			30	ø1/8	VPOC30-30R(A) (S17)-1/6J	
			ø4	VPOC30-30R(A) (S17)-4J				ø5/32	VPOC30-30R(A) (S17)-4/32J	
			ø6	VPOC30-30R(A) (S17)-6J				ø1/4	VPOC30-30R(A) (S17)-1/4J	
		40	ø3	VPOC30-40R(A) (S17)-3J			40	ø1/8	VPOC30-40R(A) (S17)-1/6J	
			ø4	VPOC30-40R(A) (S17)-4J				ø5/32	VPOC30-40R(A) (S17)-4/32J	
			ø6	VPOC30-40R(A) (S17)-6J				ø1/4	VPOC30-40R(A) (S17)-1/4J	
		50	ø3	VPOC30-50R(A) (S17)-3J			50	ø1/8	VPOC30-50R(A) (S17)-1/6J	
			ø4	VPOC30-50R(A) (S17)-4J				ø5/32	VPOC30-50R(A) (S17)-4/32J	
			ø6	VPOC30-50R(A) (S17)-6J				ø1/4	VPOC30-50R(A) (S17)-1/4J	
	ø40	20	ø3	VPOC40-20R(A) (S17)-3J	M6	ø40	20	ø1/8	VPOC40-20R(A) (S17)-1/6J	M6
			ø4	VPOC40-20R(A) (S17)-4J				ø5/32	VPOC40-20R(A) (S17)-4/32J	
			ø6	VPOC40-20R(A) (S17)-6J				ø1/4	VPOC40-20R(A) (S17)-1/4J	
		30	ø3	VPOC40-30R(A) (S17)-3J			30	ø1/8	VPOC40-30R(A) (S17)-1/6J	
			ø4	VPOC40-30R(A) (S17)-4J				ø5/32	VPOC40-30R(A) (S17)-4/32J	
			ø6	VPOC40-30R(A) (S17)-6J				ø1/4	VPOC40-30R(A) (S17)-1/4J	
		40	ø3	VPOC40-40R(A) (S17)-3J			40	ø1/8	VPOC40-40R(A) (S17)-1/6J	
			ø4	VPOC40-40R(A) (S17)-4J				ø5/32	VPOC40-40R(A) (S17)-4/32J	
			ø6	VPOC40-40R(A) (S17)-6J				ø1/4	VPOC40-40R(A) (S17)-1/4J	
		50	ø3	VPOC40-50R(A) (S17)-3J			50	ø1/8	VPOC40-50R(A) (S17)-1/6J	
			ø4	VPOC40-50R(A) (S17)-4J				ø5/32	VPOC40-50R(A) (S17)-4/32J	
			ø6	VPOC40-50R(A) (S17)-6J				ø1/4	VPOC40-50R(A) (S17)-1/4J	
	ø50	20	ø3	VPOC50-20R(A) (S17)-3J	M6	ø50	20	ø1/8	VPOC50-20R(A) (S17)-1/6J	M6
			ø4	VPOC50-20R(A) (S17)-4J				ø5/32	VPOC50-20R(A) (S17)-4/32J	
			ø6	VPOC50-20R(A) (S17)-6J				ø1/4	VPOC50-20R(A) (S17)-1/4J	
		30	ø3	VPOC50-30R(A) (S17)-3J			30	ø1/8	VPOC50-30R(A) (S17)-1/6J	
			ø4	VPOC50-30R(A) (S17)-4J				ø5/32	VPOC50-30R(A) (S17)-4/32J	
			ø6	VPOC50-30R(A) (S17)-6J				ø1/4	VPOC50-30R(A) (S17)-1/4J	
		40	ø3	VPOC50-40R(A) (S17)-3J			40	ø1/8	VPOC50-40R(A) (S17)-1/6J	
			ø4	VPOC50-40R(A) (S17)-4J				ø5/32	VPOC50-40R(A) (S17)-4/32J	
			ø6	VPOC50-40R(A) (S17)-6J				ø1/4	VPOC50-40R(A) (S17)-1/4J	
		50	ø3	VPOC50-50R(A) (S17)-3J			50	ø1/8	VPOC50-50R(A) (S17)-1/6J	
			ø4	VPOC50-50R(A) (S17)-4J				ø5/32	VPOC50-50R(A) (S17)-4/32J	
			ø6	VPOC50-50R(A) (S17)-6J				ø1/4	VPOC50-50R(A) (S17)-1/4J	

CAD data is available
at PISCO website.

RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad dia. (mm)	Stroke (mm)	Male thread size	Model code	Connection config. code
Spring type, Top port, Female thread, No cover VPOC 	ø6	20	M6×1	VPOC6-20R (S17)-M6	T8
		30		VPOC6-30R (S17)-M6	
		40		VPOC6-40R (S17)-M6	
		50		VPOC6-50R (S17)-M6	
	ø8	20	M6×1	VPOC8-20R (S17)-M6	T8
		30		VPOC8-30R (S17)-M6	
		40		VPOC8-40R (S17)-M6	
		50		VPOC8-50R (S17)-M6	
	ø10	20	M6×1	VPOC10-20R (S17)-M6	M4
		30		VPOC10-30R (S17)-M6	
		40		VPOC10-40R (S17)-M6	
		50		VPOC10-50R (S17)-M6	
	ø15	20	M6×1	VPOC15-20R (S17)-M6	M4
		30		VPOC15-30R (S17)-M6	
		40		VPOC15-40R (S17)-M6	
		50		VPOC15-50R (S17)-M6	
	ø20	20	M6×1	VPOC20-20R (S17)-M6	M6
		30		VPOC20-30R (S17)-M6	
		40		VPOC20-40R (S17)-M6	
		50		VPOC20-50R (S17)-M6	
	ø25	20	M6×1	VPOC25-20R (S17)-M6	M6
		30		VPOC25-30R (S17)-M6	
		40		VPOC25-40R (S17)-M6	
		50		VPOC25-50R (S17)-M6	
	ø30	20	M6×1	VPOC30-20R (S17)-M6	M6
		30		VPOC30-30R (S17)-M6	
		40		VPOC30-40R (S17)-M6	
		50		VPOC30-50R (S17)-M6	
	ø40	20	M6×1	VPOC40-20R (S17)-M6	M6
		30		VPOC40-30R (S17)-M6	
		40		VPOC40-40R (S17)-M6	
		50		VPOC40-50R (S17)-M6	
	ø50	20	M6×1	VPOC50-20R (S17)-M6	M6
		30		VPOC50-30R (S17)-M6	
		40		VPOC50-40R (S17)-M6	
		50		VPOC50-50R (S17)-M6	



Notes

*Deep type pad can be selected for the models with pad type code: R (A) in the model code. Please select "R" for general type and "A" for deep type pad.



CAD data is available
at PISCO website.



Packaging specifications
1 pc./bag



Options

①: Surface treatment (Fiber surface, DLC. coating, Reformed surface, and Fluoro-coating)

Optional items
⇒ P.442

Surface treatment



Fall Prevention Valve



Swivel Joint for vacuum pad



Vacuum Pad Standard Type

RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad dia. (mm)	Stroke (mm)	Tube O.D. (mm)	Model code	Connection config. code	Pad dia. (mm)	Stroke (mm)	Tube O.D. (inch)	Model code	Connection config. code
Spring type, Top port, Push-in fitting, Low dust emission VPLFC  Pad dia. 	ø0.7	2	ø3	VPLFC0.7-2RM(617)-3J	T4	ø0.7	2	ø1/8	VPLFC0.7-2RM(617)-1/4J	T4
			ø4	VPLFC0.7-2RM(617)-4J				ø5/32	VPLFC0.7-2RM(617)-9/32J	
		5	ø3	VPLFC0.7-5RM(617)-3J			5	ø1/8	VPLFC0.7-5RM(617)-1/4J	
			ø4	VPLFC0.7-5RM(617)-4J				ø5/32	VPLFC0.7-5RM(617)-9/32J	
		10	ø3	VPLFC0.7-10RM(617)-3J			10	ø1/8	VPLFC0.7-10RM(617)-1/4J	
			ø4	VPLFC0.7-10RM(617)-4J				ø5/32	VPLFC0.7-10RM(617)-9/32J	
		15	ø3	VPLFC0.7-15RM(617)-3J			15	ø1/8	VPLFC0.7-15RM(617)-1/4J	
			ø4	VPLFC0.7-15RM(617)-4J				ø5/32	VPLFC0.7-15RM(617)-9/32J	
		20	ø3	VPLFC0.7-20RM(617)-3J			20	ø1/8	VPLFC0.7-20RM(617)-1/4J	
			ø4	VPLFC0.7-20RM(617)-4J				ø5/32	VPLFC0.7-20RM(617)-9/32J	
		ø1	ø3	VPLFC1-2RM(617)-3J			2	ø1/8	VPLFC1-2RM(617)-1/4J	
			ø4	VPLFC1-2RM(617)-4J				ø5/32	VPLFC1-2RM(617)-9/32J	
			ø3	VPLFC1-5RM(617)-3J			5	ø1/8	VPLFC1-5RM(617)-1/4J	
			ø4	VPLFC1-5RM(617)-4J				ø5/32	VPLFC1-5RM(617)-9/32J	
			ø3	VPLFC1-10RM(617)-3J			10	ø1/8	VPLFC1-10RM(617)-1/4J	
			ø4	VPLFC1-10RM(617)-4J				ø5/32	VPLFC1-10RM(617)-9/32J	
		ø1.5	ø3	VPLFC1.5-2RM(617)-3J			2	ø1/8	VPLFC1.5-2RM(617)-1/4J	
			ø4	VPLFC1.5-2RM(617)-4J				ø5/32	VPLFC1.5-2RM(617)-9/32J	
			ø3	VPLFC1.5-5RM(617)-3J			5	ø1/8	VPLFC1.5-5RM(617)-1/4J	
			ø4	VPLFC1.5-5RM(617)-4J				ø5/32	VPLFC1.5-5RM(617)-9/32J	
			ø3	VPLFC1.5-10RM(617)-3J			10	ø1/8	VPLFC1.5-10RM(617)-1/4J	
			ø4	VPLFC1.5-10RM(617)-4J				ø5/32	VPLFC1.5-10RM(617)-9/32J	
		ø2	ø3	VPLFC2-2RM(617)-3J			2	ø1/8	VPLFC2-2RM(617)-1/4J	
			ø4	VPLFC2-2RM(617)-4J				ø5/32	VPLFC2-2RM(617)-9/32J	
			ø3	VPLFC2-5RM(617)-3J			5	ø1/8	VPLFC2-5RM(617)-1/4J	
			ø4	VPLFC2-5RM(617)-4J				ø5/32	VPLFC2-5RM(617)-9/32J	
			ø3	VPLFC2-10RM(617)-3J			10	ø1/8	VPLFC2-10RM(617)-1/4J	
			ø4	VPLFC2-10RM(617)-4J				ø5/32	VPLFC2-10RM(617)-9/32J	
		ø3	ø3	VPLFC3-2RM(617)-3J			2	ø1/8	VPLFC3-2RM(617)-1/4J	
			ø4	VPLFC3-2RM(617)-4J				ø5/32	VPLFC3-2RM(617)-9/32J	
			ø3	VPLFC3-5RM(617)-3J			5	ø1/8	VPLFC3-5RM(617)-1/4J	
			ø4	VPLFC3-5RM(617)-4J				ø5/32	VPLFC3-5RM(617)-9/32J	
			ø3	VPLFC3-10RM(617)-3J			10	ø1/8	VPLFC3-10RM(617)-1/4J	
			ø4	VPLFC3-10RM(617)-4J				ø5/32	VPLFC3-10RM(617)-9/32J	
		ø4	ø3	VPLFC4-2RM(617)-3J			2	ø1/8	VPLFC4-2RM(617)-1/4J	
			ø4	VPLFC4-2RM(617)-4J				ø5/32	VPLFC4-2RM(617)-9/32J	
			ø3	VPLFC4-5RM(617)-3J			5	ø1/8	VPLFC4-5RM(617)-1/4J	
			ø4	VPLFC4-5RM(617)-4J				ø5/32	VPLFC4-5RM(617)-9/32J	
			ø3	VPLFC4-10RM(617)-3J			10	ø1/8	VPLFC4-10RM(617)-1/4J	
			ø4	VPLFC4-10RM(617)-4J				ø5/32	VPLFC4-10RM(617)-9/32J	

Notes
*Barb fitting type holders are also available. Contact us for the details.

Packaging specifications
1 pc./bag



Options
Z: Surface treatment (Reformed surface, and Fluoro-coating)
B: -SF1/4 ⇒ Spring load 1/4

Optional items
⇒ P.442
Surface treatment

RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad dia. (mm)	Stroke (mm)	Tube O.D. (mm)	Model code	Connection config. code	Pad dia. (mm)	Stroke (mm)	Tube O.D. (inch)	Model code	Connection config. code
Spring type, Top port, Push-in fitting, Low dust emission VPLFC  Pad dia. 	ø6	2	ø3	VPLFC6-2R(617)-3J	T8	ø6	2	ø1/8	VPLFC6-2R(617)-1/4J	T8
			ø4	VPLFC6-2R(617)-4J				ø5/32	VPLFC6-2R(617)-9/32J	
		5	ø3	VPLFC6-5R(617)-3J			5	ø1/8	VPLFC6-5R(617)-1/4J	
			ø4	VPLFC6-5R(617)-4J				ø5/32	VPLFC6-5R(617)-9/32J	
		10	ø3	VPLFC6-10R(617)-3J			10	ø1/8	VPLFC6-10R(617)-1/4J	
			ø4	VPLFC6-10R(617)-4J				ø5/32	VPLFC6-10R(617)-9/32J	
		15	ø3	VPLFC6-15R(617)-3J			15	ø1/8	VPLFC6-15R(617)-1/4J	
			ø4	VPLFC6-15R(617)-4J				ø5/32	VPLFC6-15R(617)-9/32J	
		20	ø3	VPLFC6-20R(617)-3J			20	ø1/8	VPLFC6-20R(617)-1/4J	
			ø4	VPLFC6-20R(617)-4J				ø5/32	VPLFC6-20R(617)-9/32J	
		ø8	ø3	VPLFC8-2R(617)-3J			2	ø1/8	VPLFC8-2R(617)-1/4J	
			ø4	VPLFC8-2R(617)-4J				ø5/32	VPLFC8-2R(617)-9/32J	
			ø3	VPLFC8-5R(617)-3J			5	ø1/8	VPLFC8-5R(617)-1/4J	
			ø4	VPLFC8-5R(617)-4J				ø5/32	VPLFC8-5R(617)-9/32J	
			ø3	VPLFC8-10R(617)-3J			10	ø1/8	VPLFC8-10R(617)-1/4J	
			ø4	VPLFC8-10R(617)-4J				ø5/32	VPLFC8-10R(617)-9/32J	
		ø10	ø3	VPLFC10-2R(617)-3J			2	ø1/8	VPLFC10-2R(617)-1/4J	
			ø4	VPLFC10-2R(617)-4J				ø5/32	VPLFC10-2R(617)-9/32J	
			ø3	VPLFC10-5R(617)-3J			5	ø1/8	VPLFC10-5R(617)-1/4J	
			ø4	VPLFC10-5R(617)-4J				ø5/32	VPLFC10-5R(617)-9/32J	
			ø3	VPLFC10-10R(617)-3J			10	ø1/8	VPLFC10-10R(617)-1/4J	
			ø4	VPLFC10-10R(617)-4J				ø5/32	VPLFC10-10R(617)-9/32J	
		ø15	ø3	VPLFC15-2R(617)-3J			2	ø1/8	VPLFC15-2R(617)-1/4J	
			ø4	VPLFC15-2R(617)-4J				ø5/32	VPLFC15-2R(617)-9/32J	
			ø3	VPLFC15-5R(617)-3J			5	ø1/8	VPLFC15-5R(617)-1/4J	
			ø4	VPLFC15-5R(617)-4J				ø5/32	VPLFC15-5R(617)-9/32J	
			ø3	VPLFC15-10R(617)-3J			10	ø1/8	VPLFC15-10R(617)-1/4J	
			ø4	VPLFC15-10R(617)-4J				ø5/32	VPLFC15-10R(617)-9/32J	

Notes
*1. Deep type pad can be selected for the models with pad type code: R (A) in the model code.
Please select "R" for general type and "A" for deep type pad.
*2. Barb fitting type holders are also available. Contact us for the details.

Packaging specifications
1 pc./bag

Options
Z: Surface treatment (Fiber surface, DLC. coating, Reformed surface, and Fluoro-coating)
B: -SF1/4 ⇒ Spring load 1/4

Optional items
⇒ P.442
Surface treatment
Fall Prevention Valve
Swivel Joint for vacuum pad
Filter



Vacuum Pad Standard Type

RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad dia. (mm)	Stroke (mm)	Tube O.D. (mm)	Model code	Connection config. code	Pad dia. (mm)	Stroke (mm)	Tube O.D. (inch)	Model code	Connection config. code
Spring type, Top port, Push-in fitting, Low dust emission VPLFC  Pad dia.  to 	ø20	5	ø3	VPLFC20-5RA(677-3A)S	M6	ø20	5	ø1/8	VPLFC20-5RA(677-1A)S	M6
			ø4	VPLFC20-5RA(677-4A)S				ø5/32	VPLFC20-5RA(677-1A)S	
			ø6	VPLFC20-5RA(677-6A)S				ø1/4	VPLFC20-5RA(677-1A)S	
		10	ø3	VPLFC20-10RA(677-3A)S			10	ø1/8	VPLFC20-10RA(677-1A)S	
			ø4	VPLFC20-10RA(677-4A)S				ø5/32	VPLFC20-10RA(677-1A)S	
			ø6	VPLFC20-10RA(677-6A)S				ø1/4	VPLFC20-10RA(677-1A)S	
		15	ø3	VPLFC20-15RA(677-3A)S			15	ø1/8	VPLFC20-15RA(677-1A)S	
			ø4	VPLFC20-15RA(677-4A)S				ø5/32	VPLFC20-15RA(677-1A)S	
			ø6	VPLFC20-15RA(677-6A)S				ø1/4	VPLFC20-15RA(677-1A)S	
	ø25	5	ø3	VPLFC25-5RA(677-3A)S			5	ø1/8	VPLFC25-5RA(677-1A)S	
			ø4	VPLFC25-5RA(677-4A)S				ø5/32	VPLFC25-5RA(677-1A)S	
			ø6	VPLFC25-5RA(677-6A)S				ø1/4	VPLFC25-5RA(677-1A)S	
		10	ø3	VPLFC25-10RA(677-3A)S			10	ø1/8	VPLFC25-10RA(677-1A)S	
			ø4	VPLFC25-10RA(677-4A)S				ø5/32	VPLFC25-10RA(677-1A)S	
			ø6	VPLFC25-10RA(677-6A)S				ø1/4	VPLFC25-10RA(677-1A)S	
		15	ø3	VPLFC25-15RA(677-3A)S			15	ø1/8	VPLFC25-15RA(677-1A)S	
			ø4	VPLFC25-15RA(677-4A)S				ø5/32	VPLFC25-15RA(677-1A)S	
			ø6	VPLFC25-15RA(677-6A)S				ø1/4	VPLFC25-15RA(677-1A)S	
	ø30	5	ø3	VPLFC30-5RA(677-3A)S			5	ø1/8	VPLFC30-5RA(677-1A)S	
			ø4	VPLFC30-5RA(677-4A)S				ø5/32	VPLFC30-5RA(677-1A)S	
			ø6	VPLFC30-5RA(677-6A)S				ø1/4	VPLFC30-5RA(677-1A)S	
		10	ø3	VPLFC30-10RA(677-3A)S			10	ø1/8	VPLFC30-10RA(677-1A)S	
			ø4	VPLFC30-10RA(677-4A)S				ø5/32	VPLFC30-10RA(677-1A)S	
			ø6	VPLFC30-10RA(677-6A)S				ø1/4	VPLFC30-10RA(677-1A)S	
		15	ø3	VPLFC30-15RA(677-3A)S			15	ø1/8	VPLFC30-15RA(677-1A)S	
			ø4	VPLFC30-15RA(677-4A)S				ø5/32	VPLFC30-15RA(677-1A)S	
			ø6	VPLFC30-15RA(677-6A)S				ø1/4	VPLFC30-15RA(677-1A)S	
	ø40	5	ø3	VPLFC40-5RA(677-3A)S			5	ø1/8	VPLFC40-5RA(677-1A)S	
			ø4	VPLFC40-5RA(677-4A)S				ø5/32	VPLFC40-5RA(677-1A)S	
			ø6	VPLFC40-5RA(677-6A)S				ø1/4	VPLFC40-5RA(677-1A)S	
		10	ø3	VPLFC40-10RA(677-3A)S			10	ø1/8	VPLFC40-10RA(677-1A)S	
			ø4	VPLFC40-10RA(677-4A)S				ø5/32	VPLFC40-10RA(677-1A)S	
			ø6	VPLFC40-10RA(677-6A)S				ø1/4	VPLFC40-10RA(677-1A)S	
		15	ø3	VPLFC40-15RA(677-3A)S			15	ø1/8	VPLFC40-15RA(677-1A)S	
			ø4	VPLFC40-15RA(677-4A)S				ø5/32	VPLFC40-15RA(677-1A)S	
			ø6	VPLFC40-15RA(677-6A)S				ø1/4	VPLFC40-15RA(677-1A)S	
	ø50	5	ø3	VPLFC50-5RA(677-3A)S			5	ø1/8	VPLFC50-5RA(677-1A)S	
			ø4	VPLFC50-5RA(677-4A)S				ø5/32	VPLFC50-5RA(677-1A)S	
			ø6	VPLFC50-5RA(677-6A)S				ø1/4	VPLFC50-5RA(677-1A)S	
		10	ø3	VPLFC50-10RA(677-3A)S			10	ø1/8	VPLFC50-10RA(677-1A)S	
			ø4	VPLFC50-10RA(677-4A)S				ø5/32	VPLFC50-10RA(677-1A)S	
			ø6	VPLFC50-10RA(677-6A)S				ø1/4	VPLFC50-10RA(677-1A)S	
		15	ø3	VPLFC50-15RA(677-3A)S			15	ø1/8	VPLFC50-15RA(677-1A)S	
			ø4	VPLFC50-15RA(677-4A)S				ø5/32	VPLFC50-15RA(677-1A)S	
			ø6	VPLFC50-15RA(677-6A)S				ø1/4	VPLFC50-15RA(677-1A)S	
		20	ø3	VPLFC50-20RA(677-3A)S			20	ø1/8	VPLFC50-20RA(677-1A)S	
			ø4	VPLFC50-20RA(677-4A)S				ø5/32	VPLFC50-20RA(677-1A)S	
			ø6	VPLFC50-20RA(677-6A)S				ø1/4	VPLFC50-20RA(677-1A)S	

RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad dia. (mm)	Stroke (mm)	Male thread size	Model code	Connection config. code
Spring type, Top port, Female thread, Low dust emission VPLFC  Pad dia.  to 	ø0.7	2	M5×0.8	VPLFC0.7-2RM(677-M5)	T4
		5	M5×0.8	VPLFC0.7-5RM(677-M5)S	
		10	M5×0.8	VPLFC0.7-10RM(677-M5)S	
		15	M5×0.8	VPLFC0.7-15RM(677-M5)S	
		20	M5×0.8	VPLFC0.7-20RM(677-M5)S	
		2	M5×0.8	VPLFC1-2RM(677-M5)	
	ø1	5	M5×0.8	VPLFC1-5RM(677-M5)S	
		10	M5×0.8	VPLFC1-10RM(677-M5)S	
		15	M5×0.8	VPLFC1-15RM(677-M5)S	
		20	M5×0.8	VPLFC1-20RM(677-M5)S	
	ø1.5	2	M5×0.8	VPLFC1.5-2RM(677-M5)	
		5	M5×0.8	VPLFC1.5-5RM(677-M5)S	
		10	M5×0.8	VPLFC1.5-10RM(677-M5)S	
		15	M5×0.8	VPLFC1.5-15RM(677-M5)S	
	ø2	2	M5×0.8	VPLFC2-2RM(677-M5)	
		5	M5×0.8	VPLFC2-5RM(677-M5)S	
		10	M5×0.8	VPLFC2-10RM(677-M5)S	
		15	M5×0.8	VPLFC2-15RM(677-M5)S	
	ø3	2	M5×0.8	VPLFC3-2RM(677-M5)	
		5	M5×0.8	VPLFC3-5RM(677-M5)S	
		10	M5×0.8	VPLFC3-10RM(677-M5)S	
		15	M5×0.8	VPLFC3-15RM(677-M5)S	
	ø4	2	M5×0.8	VPLFC4-2RM(677-M5)	
		5	M5×0.8	VPLFC4-5RM(677-M5)S	
		10	M5×0.8	VPLFC4-10RM(677-M5)S	
		15	M5×0.8	VPLFC4-15RM(677-M5)S	
	ø6	2	M5×0.8	VPLFC6-2RM(677-M5)	
		5	M5×0.8	VPLFC6-5RM(677-M5)S	
		10	M5×0.8	VPLFC6-10RM(677-M5)S	
		15	M5×0.8	VPLFC6-15RM(677-M5)S	
	ø8	2	M5×0.8	VPLFC8-2RM(677-M5)	
		5	M5×0.8	VPLFC8-5RM(677-M5)S	
		10	M5×0.8	VPLFC8-10RM(677-M5)S	
		15	M5×0.8	VPLFC8-15RM(677-M5)S	
		20	M5×0.8	VPLFC8-20RM(677-M5)S	

 Packaging specifications
1 pc./bag

 Options
①: Surface treatment (DLC. coating, Reformed surface, and Fluoro-coating)
②: -SF1/4 ⇒ Spring load 1/4

Optional items
⇒ P.442

Surface treatment 

Holder type	Pad dia. (mm)	Stroke (mm)	Male thread size	Model code	Connection config. code
Spring type, Top port, Female thread, Low dust emission VPLFC  Pad dia.  to 	ø10	2	M5×0.8	VPLFC10-2R(677-M5)	M4
		5	M5×0.8	VPLFC10-5R(677-M5)S	
		10	M5×0.8	VPLFC10-10R(677-M5)S	
		15	M5×0.8	VPLFC10-15R(677-M5)S	
		20	M5×0.8	VPLFC10-20R(677-M5)S	
		2	M5×0.8	VPLFC15-2R(677-M5)	
	ø15	5	M5×0.8	VPLFC15-5R(677-M5)S	
		10	M5×0.8	VPLFC15-10R(677-M5)S	
		15	M5×0.8	VPLFC15-15R(677-M5)S	
		20	M5×0.8	VPLFC15-20R(677-M5)S	
	ø20	5	M6×1	VPLFC20-5R(677-M6)S	
		10	M6×1	VPLFC20-10R(677-M6)S	
		15	M6×1	VPLFC20-15R(677-M6)S	
		20	M6×1	VPLFC20-20R(677-M6)S	
	ø25	5	M6×1	VPLFC25-5R(677-M6)S	
		10	M6×1	VPLFC25-10R(677-M6)S	
		15	M6×1	VPLFC25-15R(677-M6)S	
		20	M6×1	VPLFC25-20R(677-M6)S	
	ø30	5	M6×1	VPLFC30-5R(677-M6)S	
		10	M6×1	VPLFC30-10R(677-M6)S	
		15	M6×1	VPLFC30-15R(677-M6)S	
		20	M6×1	VPLFC30-20R(677-M6)S	
	ø40	5	M6×1	VPLFC40-5R(677-M6)S	
		10	M6×1	VPLFC40-10R(677-M6)S	
		15	M6×1	VPLFC40-15R(677-M6)S	
		20	M6×1	VPLFC40-20R(677-M6)S	
	ø50	5	M6×1	VPLFC50-5R(677-M6)S	
		10	M6×1	VPLFC50-10R(677-M6)S	
		15	M6×1	VPLFC50-15R(677-M6)S	
		20	M6×1	VPLFC50-20R(677-M6)S	

 Notes
*Deep type pad can be selected for the models with pad type code: R (A) in the model code. Please select "R" for general type and "A" for deep type pad.

Optional items
⇒ P.442

Surface treatment  Fall Prevention Valve

RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad dia. (mm)	Tube O.D. (mm)	Model code	13 -S3 spec.	Connection config. code	Pad dia. (mm)	Tube O.D. (mm)	Model code	13 -S3 spec.	Connection config. code
Spring type, Side port, Push-in fitting, Mini VPMD 	ø0.7	ø3	VPMD0.7-2RM(617)-3J	—	T4	ø0.7	ø1/8	VPMD0.7-2RM(617)-1/8J	○	T4
		ø4	VPMD0.7-2RM(617)-4J	○			ø5/32	VPMD0.7-2RM(617)-5/32J	○	
		ø1	VPMD1-2RM(617)-3J	—			ø1/8	VPMD1-2RM(617)-1/8J	○	
		ø3	VPMD1-2RM(617)-4J	○			ø5/32	VPMD1-2RM(617)-5/32J	○	
	ø1.5	ø3	VPMD1.5-2RM(617)-3J	—	T4	ø1.5	ø1/8	VPMD1.5-2RM(617)-1/8J	○	T4
		ø4	VPMD1.5-2RM(617)-4J	○			ø5/32	VPMD1.5-2RM(617)-5/32J	○	
		ø3	VPMD2-2RM(617)-3J	—			ø1/8	VPMD2-2RM(617)-1/8J	○	
		ø4	VPMD2-2RM(617)-4J	○			ø5/32	VPMD2-2RM(617)-5/32J	○	
	ø2	ø3	VPMD2-2RM(617)-3J	—	T8	ø2	ø1/8	VPMD2-2RM(617)-1/8J	○	T8
		ø4	VPMD2-2RM(617)-4J	○			ø5/32	VPMD2-2RM(617)-5/32J	○	
		ø3	VPMD3-2RM(617)-3J	—			ø1/8	VPMD3-2RM(617)-1/8J	○	
		ø4	VPMD3-2RM(617)-4J	○			ø5/32	VPMD3-2RM(617)-5/32J	○	
	ø3	ø3	VPMD4-2RM(617)-3J	—	M4	ø3	ø1/8	VPMD4-2RM(617)-1/8J	○	M4
		ø4	VPMD4-2RM(617)-4J	○			ø5/32	VPMD4-2RM(617)-5/32J	○	
		ø3	VPMD6-2R(617)-3J	—			ø1/8	VPMD6-2R(617)-1/8J	○	
		ø4	VPMD6-2R(617)-4J	○			ø5/32	VPMD6-2R(617)-5/32J	○	
	ø6	ø3	VPMD8-2R(617)-3J	—	M6	ø6	ø1/8	VPMD8-2R(617)-1/8J	○	M6
		ø4	VPMD8-2R(617)-4J	○			ø5/32	VPMD8-2R(617)-5/32J	○	
		ø3	VPMD10-4R(617)-3J	—			ø1/8	VPMD10-4R(617)-1/8J	○	
		ø4	VPMD10-4R(617)-4J	○			ø5/32	VPMD10-4R(617)-5/32J	○	
	ø10	ø6	VPMD10-4R(617)-6J	○	M4	ø10	ø1/4	VPMD10-4R(617)-1/4J	○	M4
		ø3	VPMD15-4R(617)-3J	—			ø1/8	VPMD15-4R(617)-1/8J	○	
		ø4	VPMD15-4R(617)-4J	○			ø5/32	VPMD15-4R(617)-5/32J	○	
		ø6	VPMD15-4R(617)-6J	○			ø1/4	VPMD15-4R(617)-1/4J	○	
	ø15	ø3	VPMD20-4R(617)-3J	—	M6	ø15	ø1/8	VPMD20-4R(617)-1/8J	○	M6
		ø4	VPMD20-4R(617)-4J	○			ø5/32	VPMD20-4R(617)-5/32J	○	
		ø6	VPMD20-4R(617)-6J	○			ø1/4	VPMD20-4R(617)-1/4J	○	
		ø3	VPMD25-4R(617)-3J	—			ø1/8	VPMD25-4R(617)-1/8J	○	
	ø25	ø4	VPMD25-4R(617)-4J	○	M6	ø25	ø5/32	VPMD25-4R(617)-5/32J	○	M6
		ø6	VPMD25-4R(617)-6J	○			ø1/4	VPMD25-4R(617)-1/4J	○	
		ø3	VPMD30-4R(617)-3J	—			ø1/8	VPMD30-4R(617)-1/8J	○	
		ø4	VPMD30-4R(617)-4J	○			ø5/32	VPMD30-4R(617)-5/32J	○	
	ø30	ø6	VPMD30-4R(617)-6J	○	M6	ø30	ø1/4	VPMD30-4R(617)-1/4J	○	M6
		ø3	VPMD40-4R(617)-3J	—			ø1/8	VPMD40-4R(617)-1/8J	○	
		ø4	VPMD40-4R(617)-4J	○			ø5/32	VPMD40-4R(617)-5/32J	○	
		ø6	VPMD40-4R(617)-6J	○			ø1/4	VPMD40-4R(617)-1/4J	○	
	ø40	ø3	VPMD50-4R(617)-3J	—	M6	ø40	ø1/8	VPMD50-4R(617)-1/8J	○	M6
		ø4	VPMD50-4R(617)-4J	○			ø5/32	VPMD50-4R(617)-5/32J	○	
		ø6	VPMD50-4R(617)-6J	○			ø1/4	VPMD50-4R(617)-1/4J	○	
		ø3	VPMD50-4R(617)-3J	—			ø1/8	VPMD50-4R(617)-1/8J	○	
Holder type	Pad dia. (mm)	Male thread size	Model code	13 -S3 spec.	Connection config. code					
Spring type, Side port, Female thread, Mini VPMD 	ø0.7	M3×0.5	VPMD0.7-2RM(617)-M3	○	T4					
		ø1	VPMD1-2RM(617)-M3	○						
	ø1.5	M3×0.5	VPMD1.5-2RM(617)-M3	○						
		ø2	VPMD2-2RM(617)-M3	○						
	ø2	M3×0.5	VPMD2-2RM(617)-M3	○	T8					
		ø3	VPMD3-2RM(617)-M3	○						
	ø3	M3×0.5	VPMD3-2RM(617)-M3	○						
		ø4	VPMD4-2RM(617)-M3	○						
	ø6	M3×0.5	VPMD6-2R(617)-M3	○	M4					
		ø8	VPMD8-2R(617)-M3	○						
	ø10	M5×0.8	VPMD10-4R(617)-M5	○						
		ø15	VPMD15-4R(617)-M5	○						
	ø20	M5×0.8	VPMD20-4R(617)-M5	○	M6					
		ø25	VPMD25-4R(617)-M5	○						
	ø30	M5×0.8	VPMD30-4R(617)-M5	○						
		ø40	VPMD40-4R(617)-M5	○						
	ø50	M5×0.8	VPMD50-4R(617)-M5	○						

Holder type	Pad dia. (mm)	Male thread size	Model code	13 -S3 spec.	Connection config. code
Spring type, Side port, Female thread, Mini VPMD 	ø0.7	M3×0.5	VPMD0.7-2RM(617)-M3	○	T4
		ø1	VPMD1-2RM(617)-M3	○	
	ø1.5	M3×0.5	VPMD1.5-2RM(617)-M3	○	
		ø2	VPMD2-2RM(617)-M3	○	
	ø2	M3×0.5	VPMD2-2RM(617)-M3	○	T8
		ø3	VPMD3-2RM(617)-M3	○	
	ø3	M3×0.5	VPMD3-2RM(617)-M3	○	
		ø4	VPMD4-2RM(617)-M3	○	
	ø6	M3×0.5	VPMD6-2R(617)-M3	○	M4
		ø8	VPMD8-2R(617)-M3	○	
	ø10	M5×0.8	VPMD10-4R(617)-M5	○	
		ø15	VPMD15-4R(617)-M5	○	
	ø20	M5×0.8	VPMD20-4R(617)-M5	○	M6
		ø25	VPMD25-4R(617)-M5	○	
	ø30	M5×0.8	VPMD30-4R(617)-M5	○	
		ø40	VPMD40-4R(617)-M5	○	
	ø50	M5×0.8	VPMD50-4R(617)-M5	○	



Notes

*1. Deep type pad can be selected for the models with pad type code: R (A) in the model code. Please select "R" for general type and "A" for deep type pad.

*2. Holders are also available in Push-in fitting type for tube O.D. of 1.8 mm and 2 mm, and barb fitting type. Contact us for the details.



CAD data is available at PISCO website.



Packaging specifications 1 pc./bag



Options

⑦: Surface treatment (Fiber surface, DLC. coating, Reformed surface, and Fluoro-coating)
⑬: -S3 ⇒ -S3 spec. (○ in the lists: Available)

*1. For "-S3 spec.", the release ring color is dark blue, and the gasket material is FKM+SUS316.

*2. For inch size push-in fitting, the release ring color is white even for "-S3 spec."

Optional items ⇒ P.442	Surface treatment	Fall Prevention Valve	Swivel Joint for vacuum pad	Filter

RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad dia. (mm)	Stroke (mm)	Tube O.D. (mm)	Model code	13-S3 -S3 spec.	Connection config. code	Pad dia. (mm)	Stroke (mm)	Tube O.D. (inch)	Model code	13-S3 -S3 spec.	Connection config. code				
Spring type, Side port, Push-in fitting, Standard VPD  Pad dia. ø1 mm to ø4 mm	ø1	3	ø3	VPD1-3R(6)-3J(9)	—	H3	ø1	3	ø1/8	VPD1-3R(6)-1/8J(9)	—	H3				
			ø4	VPD1-3R(6)-4J(9)	13				○	ø5/32	VPD1-3R(6)-5/32J(9)		13	○		
			ø6	VPD1-3R(6)-6J(9)	13				○	ø1/4	VPD1-3R(6)-1/4J(9)		—			
		10	ø3	VPD1-10R(6)-3J(9)	—			10	ø1/8	VPD1-10R(6)-1/8J(9)	—		10	ø5/32	VPD1-10R(6)-5/32J(9)	—
			ø4	VPD1-10R(6)-4J(9)	—				ø1/4	VPD1-10R(6)-1/4J(9)	—					
			ø6	VPD1-10R(6)-6J(9)	—				ø1/8	VPD1-15R(6)-1/8J(9)	—					
		15	ø3	VPD1-15R(6)-3J(9)	—			15	ø5/32	VPD1-15R(6)-5/32J(9)	—		15	ø1/4	VPD1-15R(6)-1/4J(9)	—
			ø4	VPD1-15R(6)-4J(9)	—				ø1/4	VPD1-15R(6)-1/4J(9)	—					
			ø6	VPD1-15R(6)-6J(9)	—				ø1/8	VPD1-20R(6)-1/8J(9)	—					
		20	ø3	VPD1-20R(6)-3J(9)	—			20	ø5/32	VPD1-20R(6)-5/32J(9)	—		20	ø1/4	VPD1-20R(6)-1/4J(9)	—
			ø4	VPD1-20R(6)-4J(9)	—				ø1/4	VPD1-20R(6)-1/4J(9)	—					
			ø6	VPD1-20R(6)-6J(9)	—				ø1/8	VPD2-3R(6)-1/8J(9)	13			○		
	ø2	3	ø4	VPD2-3R(6)-4J(9)	13	○	H3	ø2	3	ø5/32	VPD2-3R(6)-5/32J(9)	13	○	H3		
			ø6	VPD2-3R(6)-6J(9)	13	○				ø1/4	VPD2-3R(6)-1/4J(9)	—				
			ø3	VPD2-10R(6)-3J(9)	—	ø1/8				VPD2-10R(6)-1/8J(9)	—					
		10	ø4	VPD2-10R(6)-4J(9)	—	10			ø5/32	VPD2-10R(6)-5/32J(9)	—	10	ø1/4		VPD2-10R(6)-1/4J(9)	—
			ø6	VPD2-10R(6)-6J(9)	—				ø1/8	VPD2-15R(6)-1/8J(9)	—					
			ø3	VPD2-15R(6)-3J(9)	—				ø5/32	VPD2-15R(6)-5/32J(9)	—					
		15	ø4	VPD2-15R(6)-4J(9)	—	15			ø1/4	VPD2-15R(6)-1/4J(9)	—	15	ø1/8		VPD2-20R(6)-1/8J(9)	—
			ø6	VPD2-15R(6)-6J(9)	—				ø5/32	VPD2-20R(6)-5/32J(9)	—					
			ø3	VPD2-20R(6)-3J(9)	—				ø1/4	VPD2-20R(6)-1/4J(9)	—					
		20	ø4	VPD2-20R(6)-4J(9)	—	20			ø5/32	VPD2-20R(6)-5/32J(9)	—	20	ø1/4		VPD2-20R(6)-1/4J(9)	—
			ø6	VPD2-20R(6)-6J(9)	—				ø1/8	VPD3-3R(6)-1/8J(9)	—					
			ø3	VPD3-3R(6)-3J(9)	—				ø5/32	VPD3-3R(6)-5/32J(9)	13		○			
	ø3	3	ø4	VPD3-3R(6)-4J(9)	13	○	H3	ø3	3	ø1/4	VPD3-3R(6)-1/4J(9)	—	H3			
			ø6	VPD3-3R(6)-6J(9)	13	○				ø1/8	VPD3-10R(6)-1/8J(9)	—				
			ø3	VPD3-10R(6)-3J(9)	—	ø5/32				VPD3-10R(6)-5/32J(9)	—					
		10	ø4	VPD3-10R(6)-4J(9)	—	10			ø1/4	VPD3-10R(6)-1/4J(9)	—	10		ø1/8	VPD3-15R(6)-1/8J(9)	—
			ø6	VPD3-10R(6)-6J(9)	—				ø5/32	VPD3-15R(6)-5/32J(9)	—					
			ø3	VPD3-15R(6)-3J(9)	—				ø1/4	VPD3-15R(6)-1/4J(9)	—					
		15	ø4	VPD3-15R(6)-4J(9)	—	15			ø5/32	VPD3-15R(6)-5/32J(9)	—	15		ø1/8	VPD3-20R(6)-1/8J(9)	—
			ø6	VPD3-15R(6)-6J(9)	—				ø5/32	VPD3-20R(6)-5/32J(9)	—					
			ø3	VPD3-20R(6)-3J(9)	—				ø1/4	VPD3-20R(6)-1/4J(9)	—					
		20	ø4	VPD3-20R(6)-4J(9)	—	20			ø5/32	VPD3-20R(6)-5/32J(9)	—	20		ø1/4	VPD4-3R(6)-1/4J(9)	—
			ø6	VPD3-20R(6)-6J(9)	—				ø1/8	VPD4-3R(6)-1/8J(9)	—					
			ø3	VPD4-3R(6)-3J(9)	—				ø5/32	VPD4-3R(6)-5/32J(9)	13			○		
	ø4	3	ø4	VPD4-3R(6)-4J(9)	13	○	H3	ø4	3	ø1/4	VPD4-3R(6)-1/4J(9)	—	H3			
			ø6	VPD4-3R(6)-6J(9)	13	○				ø1/8	VPD4-10R(6)-1/8J(9)	—				
			ø3	VPD4-10R(6)-3J(9)	—	ø5/32				VPD4-10R(6)-5/32J(9)	—					
		10	ø4	VPD4-10R(6)-4J(9)	—	10			ø1/4	VPD4-10R(6)-1/4J(9)	—	10		ø1/8	VPD4-15R(6)-1/8J(9)	—
			ø6	VPD4-10R(6)-6J(9)	—				ø5/32	VPD4-15R(6)-5/32J(9)	—					
			ø3	VPD4-15R(6)-3J(9)	—				ø1/4	VPD4-15R(6)-1/4J(9)	—					
		15	ø4	VPD4-15R(6)-4J(9)	—	15			ø5/32	VPD4-15R(6)-5/32J(9)	—	15		ø1/8	VPD4-20R(6)-1/8J(9)	—
			ø6	VPD4-15R(6)-6J(9)	—				ø5/32	VPD4-20R(6)-5/32J(9)	—					
			ø3	VPD4-20R(6)-3J(9)	—				ø1/4	VPD4-20R(6)-1/4J(9)	—					
		20	ø4	VPD4-20R(6)-4J(9)	—	20			ø5/32	VPD4-20R(6)-5/32J(9)	—	20		ø1/4	VPD4-20R(6)-1/4J(9)	—
			ø6	VPD4-20R(6)-6J(9)	—				ø1/8	VPD4-20R(6)-1/8J(9)	—					
			ø3	VPD4-20R(6)-3J(9)	—				ø5/32	VPD4-20R(6)-5/32J(9)	—					

Vacuum Pad Standard Type

RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad dia. (mm)	Stroke (mm)	Tube O.D. (mm)	Model code	13 -S3 -S3 spec.	Connection config. code	Pad dia. (mm)	Stroke (mm)	Tube O.D. (inch)	Model code	13 -S3 -S3 spec.	Connection config. code
Spring type, Side port, Push-in fitting, Standard VPD  Pad dia.  to 	$\varnothing 6$	3	$\varnothing 3$	VPD6-3R(6)7-3J9	—	—	$\varnothing 6$	3	$\varnothing 1/8$	VPD6-3R(6)7-1/8J9	—	—
			$\varnothing 4$	VPD6-3R(6)7-4J9	○	—			$\varnothing 5/32$	VPD6-3R(6)7-5/32J9	○	—
			$\varnothing 6$	VPD6-3R(6)7-6J9	○	—			$\varnothing 1/4$	VPD6-3R(6)7-1/4J9	—	—
		10	$\varnothing 3$	VPD6-10R(6)7-3J9	—	—		10	$\varnothing 1/8$	VPD6-10R(6)7-1/8J9	—	—
			$\varnothing 4$	VPD6-10R(6)7-4J9	—	—			$\varnothing 5/32$	VPD6-10R(6)7-5/32J9	—	—
			$\varnothing 6$	VPD6-10R(6)7-6J9	—	—			$\varnothing 1/4$	VPD6-10R(6)7-1/4J9	—	—
		15	$\varnothing 3$	VPD6-15R(6)7-3J9	—	—		15	$\varnothing 1/8$	VPD6-15R(6)7-1/8J9	—	—
			$\varnothing 4$	VPD6-15R(6)7-4J9	—	—			$\varnothing 5/32$	VPD6-15R(6)7-5/32J9	—	—
			$\varnothing 6$	VPD6-15R(6)7-6J9	—	—			$\varnothing 1/4$	VPD6-15R(6)7-1/4J9	—	—
		20	$\varnothing 3$	VPD6-20R(6)7-3J9	—	—		20	$\varnothing 1/8$	VPD6-20R(6)7-1/8J9	—	—
			$\varnothing 4$	VPD6-20R(6)7-4J9	—	—			$\varnothing 5/32$	VPD6-20R(6)7-5/32J9	—	—
			$\varnothing 6$	VPD6-20R(6)7-6J9	—	—			$\varnothing 1/4$	VPD6-20R(6)7-1/4J9	—	—
	$\varnothing 8$	3	$\varnothing 3$	VPD8-3R(8)7-3J9	—	—	$\varnothing 8$	3	$\varnothing 1/8$	VPD8-3R(8)7-1/8J9	—	—
			$\varnothing 4$	VPD8-3R(8)7-4J9	○	—			$\varnothing 5/32$	VPD8-3R(8)7-5/32J9	○	—
			$\varnothing 6$	VPD8-3R(8)7-6J9	○	—			$\varnothing 1/4$	VPD8-3R(8)7-1/4J9	—	—
		10	$\varnothing 3$	VPD8-10R(8)7-3J9	—	—		10	$\varnothing 1/8$	VPD8-10R(8)7-1/8J9	—	—
			$\varnothing 4$	VPD8-10R(8)7-4J9	—	—			$\varnothing 5/32$	VPD8-10R(8)7-5/32J9	—	—
			$\varnothing 6$	VPD8-10R(8)7-6J9	—	—			$\varnothing 1/4$	VPD8-10R(8)7-1/4J9	—	—
		15	$\varnothing 3$	VPD8-15R(8)7-3J9	—	—		15	$\varnothing 1/8$	VPD8-15R(8)7-1/8J9	—	—
			$\varnothing 4$	VPD8-15R(8)7-4J9	—	—			$\varnothing 5/32$	VPD8-15R(8)7-5/32J9	—	—
			$\varnothing 6$	VPD8-15R(8)7-6J9	—	—			$\varnothing 1/4$	VPD8-15R(8)7-1/4J9	—	—
		20	$\varnothing 3$	VPD8-20R(8)7-3J9	—	—		20	$\varnothing 1/8$	VPD8-20R(8)7-1/8J9	—	—
			$\varnothing 4$	VPD8-20R(8)7-4J9	—	—			$\varnothing 5/32$	VPD8-20R(8)7-5/32J9	—	—
			$\varnothing 6$	VPD8-20R(8)7-6J9	—	—			$\varnothing 1/4$	VPD8-20R(8)7-1/4J9	—	—
	$\varnothing 10$	6	$\varnothing 3$	VPD10-6R(10)7-3J9	—	—	$\varnothing 10$	6	$\varnothing 1/8$	VPD10-6R(10)7-1/8J9	—	—
			$\varnothing 4$	VPD10-6R(10)7-4J9	○	—			$\varnothing 5/32$	VPD10-6R(10)7-5/32J9	○	—
			$\varnothing 6$	VPD10-6R(10)7-6J9	○	—			$\varnothing 1/4$	VPD10-6R(10)7-1/4J9	—	—
		10	$\varnothing 3$	VPD10-10R(10)7-3J9	—	—		10	$\varnothing 1/8$	VPD10-10R(10)7-1/8J9	—	—
			$\varnothing 4$	VPD10-10R(10)7-4J9	—	—			$\varnothing 5/32$	VPD10-10R(10)7-5/32J9	—	—
			$\varnothing 6$	VPD10-10R(10)7-6J9	—	—			$\varnothing 1/4$	VPD10-10R(10)7-1/4J9	—	—
		15	$\varnothing 3$	VPD10-15R(10)7-3J9	—	—		15	$\varnothing 1/8$	VPD10-15R(10)7-1/8J9	—	—
			$\varnothing 4$	VPD10-15R(10)7-4J9	—	—			$\varnothing 5/32$	VPD10-15R(10)7-5/32J9	—	—
			$\varnothing 6$	VPD10-15R(10)7-6J9	—	—			$\varnothing 1/4$	VPD10-15R(10)7-1/4J9	—	—
		20	$\varnothing 3$	VPD10-20R(10)7-3J9	—	—		20	$\varnothing 1/8$	VPD10-20R(10)7-1/8J9	—	—
			$\varnothing 4$	VPD10-20R(10)7-4J9	—	—			$\varnothing 5/32$	VPD10-20R(10)7-5/32J9	—	—
			$\varnothing 6$	VPD10-20R(10)7-6J9	—	—			$\varnothing 1/4$	VPD10-20R(10)7-1/4J9	—	—
	$\varnothing 15$	6	$\varnothing 3$	VPD15-6R(15)7-3J9	—	—	$\varnothing 15$	6	$\varnothing 1/8$	VPD15-6R(15)7-1/8J9	—	—
			$\varnothing 4$	VPD15-6R(15)7-4J9	○	—			$\varnothing 5/32$	VPD15-6R(15)7-5/32J9	○	—
			$\varnothing 6$	VPD15-6R(15)7-6J9	○	—			$\varnothing 1/4$	VPD15-6R(15)7-1/4J9	—	—
		10	$\varnothing 3$	VPD15-10R(15)7-3J9	—	—		10	$\varnothing 1/8$	VPD15-10R(15)7-1/8J9	—	—
			$\varnothing 4$	VPD15-10R(15)7-4J9	—	—			$\varnothing 5/32$	VPD15-10R(15)7-5/32J9	—	—
			$\varnothing 6$	VPD15-10R(15)7-6J9	—	—			$\varnothing 1/4$	VPD15-10R(15)7-1/4J9	—	—
		15	$\varnothing 3$	VPD15-15R(15)7-3J9	—	—		15	$\varnothing 1/8$	VPD15-15R(15)7-1/8J9	—	—
			$\varnothing 4$	VPD15-15R(15)7-4J9	—	—			$\varnothing 5/32$	VPD15-15R(15)7-5/32J9	—	—
			$\varnothing 6$	VPD15-15R(15)7-6J9	—	—			$\varnothing 1/4$	VPD15-15R(15)7-1/4J9	—	—
		20	$\varnothing 3$	VPD15-20R(15)7-3J9	—	—		20	$\varnothing 1/8$	VPD15-20R(15)7-1/8J9	—	—
			$\varnothing 4$	VPD15-20R(15)7-4J9	—	—			$\varnothing 5/32$	VPD15-20R(15)7-5/32J9	—	—
			$\varnothing 6$	VPD15-20R(15)7-6J9	—	—			$\varnothing 1/4$	VPD15-20R(15)7-1/4J9	—	—

- Notes**
- *1. Deep type pad can be selected for the models with pad type code: R (A) in the model code. Please select "R" for general type and "A" for deep type pad.
- *2. Holders are also available in Push-in fitting type (limited to pad dia. 8 mm or smaller) for tube O.D. of 1.8 mm and 2 mm, and barb fitting type. Contact us for the details.

- Options**
- ①: Surface treatment (Fiber surface, DLC. coating, Reformed surface, and Fluoro-coating)
- ②: -DC ⇒ Holder with dust catcher
- ③: -S3 ⇒ S3 spec. (○ in the lists: Available)
- *1. For "-S3 spec.", the release ring color is dark blue, and the gasket material is FKM+SUS316.
- *2. For inch size push-in fitting, the release ring color is white even for "-S3 spec."

Optional items ⇒ P.442

Surface treatment 

Dust Catcher (VPD) 

Fall Prevention Valve 

Swivel Joint for vacuum pad 

Filter 

CAD data is available at PISCO website.

Packaging specifications 1 pc./1 bag

RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad dia. (mm)	Stroke (mm)	Tube O.D. (mm)	Model code	13 -S3 -S3 spec.	Connection config. code	Pad dia. (mm)	Stroke (mm)	Tube O.D. (inch)	Model code	13 -S3 -S3 spec.	Connection config. code
Spring type, Side port, Push-in fitting, Standard VPD  Pad dia.  to 	$\varnothing 20$	6	$\varnothing 3$	VPD20-6R(A)67-3J9	—	—	$\varnothing 20$	6	$\varnothing 1/8$	VPD20-6R(A)67-1/8J9	—	—
			$\varnothing 4$	VPD20-6R(A)67-4J9	○	—			$\varnothing 5/32$	VPD20-6R(A)67-5/32J9	○	—
			$\varnothing 6$	VPD20-6R(A)67-6J9	○	—			$\varnothing 1/4$	VPD20-6R(A)67-1/4J9	—	—
		10	$\varnothing 3$	VPD20-10R(A)67-3J9	—	—		10	$\varnothing 1/8$	VPD20-10R(A)67-1/8J9	—	—
			$\varnothing 4$	VPD20-10R(A)67-4J9	—	—			$\varnothing 5/32$	VPD20-10R(A)67-5/32J9	—	—
			$\varnothing 6$	VPD20-10R(A)67-6J9	—	—			$\varnothing 1/4$	VPD20-10R(A)67-1/4J9	—	—
		15	$\varnothing 3$	VPD20-15R(A)67-3J9	—	—		15	$\varnothing 1/8$	VPD20-15R(A)67-1/8J9	—	—
			$\varnothing 4$	VPD20-15R(A)67-4J9	—	—			$\varnothing 5/32$	VPD20-15R(A)67-5/32J9	—	—
			$\varnothing 6$	VPD20-15R(A)67-6J9	—	—			$\varnothing 1/4$	VPD20-15R(A)67-1/4J9	—	—
		20	$\varnothing 3$	VPD20-20R(A)67-3J9	—	—		20	$\varnothing 1/8$	VPD20-20R(A)67-1/8J9	—	—
			$\varnothing 4$	VPD20-20R(A)67-4J9	—	—			$\varnothing 5/32$	VPD20-20R(A)67-5/32J9	—	—
			$\varnothing 6$	VPD20-20R(A)67-6J9	—	—			$\varnothing 1/4$	VPD20-20R(A)67-1/4J9	—	—
	$\varnothing 25$	6	$\varnothing 3$	VPD25-6R(A)67-3J9	—	—	$\varnothing 25$	6	$\varnothing 1/8$	VPD25-6R(A)67-1/8J9	—	—
			$\varnothing 4$	VPD25-6R(A)67-4J9	○	—			$\varnothing 5/32$	VPD25-6R(A)67-5/32J9	○	—
			$\varnothing 6$	VPD25-6R(A)67-6J9	○	—			$\varnothing 1/4$	VPD25-6R(A)67-1/4J9	—	—
		10	$\varnothing 3$	VPD25-10R(A)67-3J9	—	—		10	$\varnothing 1/8$	VPD25-10R(A)67-1/8J9	—	—
			$\varnothing 4$	VPD25-10R(A)67-4J9	—	—			$\varnothing 5/32$	VPD25-10R(A)67-5/32J9	—	—
			$\varnothing 6$	VPD25-10R(A)67-6J9	—	—			$\varnothing 1/4$	VPD25-10R(A)67-1/4J9	—	—
		15	$\varnothing 3$	VPD25-15R(A)67-3J9	—	—		15	$\varnothing 1/8$	VPD25-15R(A)67-1/8J9	—	—
			$\varnothing 4$	VPD25-15R(A)67-4J9	—	—			$\varnothing 5/32$	VPD25-15R(A)67-5/32J9	—	—
			$\varnothing 6$	VPD25-15R(A)67-6J9	—	—			$\varnothing 1/4$	VPD25-15R(A)67-1/4J9	—	—
		20	$\varnothing 3$	VPD25-20R(A)67-3J9	—	—		20	$\varnothing 1/8$	VPD25-20R(A)67-1/8J9	—	—
			$\varnothing 4$	VPD25-20R(A)67-4J9	—	—			$\varnothing 5/32$	VPD25-20R(A)67-5/32J9	—	—
			$\varnothing 6$	VPD25-20R(A)67-6J9	—	—			$\varnothing 1/4$	VPD25-20R(A)67-1/4J9	—	—

Vacuum Pad Standard Type

RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad dia. (mm)	Stroke (mm)	Tube O.D. (mm)	Model code	⑬ -S3 -S3 spec.	Connection config. code	Pad dia. (mm)	Stroke (mm)	Tube O.D. (inch)	Model code	⑬ -S3 -S3 spec.	Connection config. code
Spring type, Side port, Push-in fitting, Standard VPD  Pad dia.  to 	ø60	10	ø4	VPD60-10R(A)⑬⑦-4J⑨ ^{①②}	—	M10	ø60	10	ø1/8	VPD60-10R(A)⑬⑦-1/8J⑨ ^{①②}	—	M10
			ø6	VPD60-10R(A)⑬⑦-6J⑨ ^{①②}	—				ø5/32	VPD60-10R(A)⑬⑦-5/32J⑨ ^{①②}	—	
			ø8	VPD60-10R(A)⑬⑦-8J⑨ ^{①②}	—				ø3/16	VPD60-10R(A)⑬⑦-3/16J⑨ ^{①②}	—	
	ø80	10	ø4	VPD80-10R(A)⑬⑦-4J⑨ ^{①②}	—		ø80	10	ø1/4	VPD80-10R(A)⑬⑦-1/4J⑨ ^{①②}	—	M10
			ø6	VPD80-10R(A)⑬⑦-6J⑨ ^{①②}	—				ø5/16	VPD80-10R(A)⑬⑦-5/16J⑨ ^{①②}	—	
			ø8	VPD80-10R(A)⑬⑦-8J⑨ ^{①②}	—				ø3/8	VPD80-10R(A)⑬⑦-3/8J⑨ ^{①②}	—	
	ø100	10	ø4	VPD100-10R(A)⑬⑦-4J⑨ ^{①②}	—	M20	ø100	10	ø1/8	VPD100-10R(A)⑬⑦-1/8J⑨ ^{①②}	—	M20
			ø6	VPD100-10R(A)⑬⑦-6J⑨ ^{①②}	—				ø5/32	VPD100-10R(A)⑬⑦-5/32J⑨ ^{①②}	—	
			ø8	VPD100-10R(A)⑬⑦-8J⑨ ^{①②}	—				ø3/16	VPD100-10R(A)⑬⑦-3/16J⑨ ^{①②}	—	
	ø150	20	ø6	VPD150-20R(A)⑬⑦-6J⑨ ^{①②}	—		ø150	20	ø1/4	VPD150-20R(A)⑬⑦-1/4J⑨ ^{①②}	—	M20
			ø8	VPD150-20R(A)⑬⑦-8J⑨ ^{①②}	—				ø5/16	VPD150-20R(A)⑬⑦-5/16J⑨ ^{①②}	—	
			ø10	VPD150-20R(A)⑬⑦-10J⑨ ^{①②}	—				ø3/8	VPD150-20R(A)⑬⑦-3/8J⑨ ^{①②}	—	
	ø200	20	ø6	VPD200-20R(A)⑬⑦-6J⑨ ^{①②}	—	M20	ø200	20	ø1/8	VPD200-20R(A)⑬⑦-1/8J⑨ ^{①②}	—	M20
			ø8	VPD200-20R(A)⑬⑦-8J⑨ ^{①②}	—				ø5/32	VPD200-20R(A)⑬⑦-5/32J⑨ ^{①②}	—	
			ø10	VPD200-20R(A)⑬⑦-10J⑨ ^{①②}	—				ø3/16	VPD200-20R(A)⑬⑦-3/16J⑨ ^{①②}	—	
							ø150	20	ø1/4	VPD150-20R(A)⑬⑦-1/4J⑨ ^{①②}	—	
									ø5/16	VPD150-20R(A)⑬⑦-5/16J⑨ ^{①②}	—	
									ø3/8	VPD150-20R(A)⑬⑦-3/8J⑨ ^{①②}	—	
							ø200	20	ø1/2	VPD150-20R(A)⑬⑦-1/2J⑨ ^{①②}	—	M20
									ø1/8	VPD200-20R(A)⑬⑦-1/8J⑨ ^{①②}	—	
									ø5/32	VPD200-20R(A)⑬⑦-5/32J⑨ ^{①②}	—	
							ø200	20	ø3/16	VPD200-20R(A)⑬⑦-3/16J⑨ ^{①②}	—	
									ø1/4	VPD200-20R(A)⑬⑦-1/4J⑨ ^{①②}	—	
									ø5/16	VPD200-20R(A)⑬⑦-5/16J⑨ ^{①②}	—	
							ø200	20	ø3/8	VPD200-20R(A)⑬⑦-3/8J⑨ ^{①②}	—	M20
									ø1/2	VPD200-20R(A)⑬⑦-1/2J⑨ ^{①②}	—	

- Notes**
- *1. Deep type pad can be selected for the models with pad type code: R (A) in the model code. Please select "R" for general type and "A" for deep type pad.
 - *2. Pad material code: SE of pad dia. 60 mm or larger are not available for Deep type pad.
 - *3. Food Sanitation Act-compliant NBR (G) is not available.
- CAD data is available**
at PISCO website.
- Packaging specifications**
1 pc./bag
- Options**
- ⑦: Surface treatment (Fiber surface, DLC. coating, Reformed surface, and Fluoro-coating)
⑨: -DC ⇒ Holder with dust catcher
⑬: -S3 ⇒ -S3 spec. (○ in the lists: Available)
*1. For *-S3 spec., the release ring color is dark blue, and the gasket material is FKM+SUS316.
*2. For inch size push-in fitting, the release ring color is white even for *-S3 spec.*



RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad dia. (mm)	Stroke (mm)	Male thread size	Model code	⑬ -S3 -S3 spec.	Connection config. code
Spring type, Side port, Female thread, Standard VPD 	ø1	3 10 15 20	M5×0.8	VPD1-3R(A)⑬-M5⑨ ^{①②}	○	M10
				VPD1-10R(A)⑬-M5⑨ ^{①②}	—	
				VPD1-15R(A)⑬-M5⑨ ^{①②}	—	
	ø2	3 10 15 20	M5×0.8	VPD2-3R(A)⑬-M5⑨ ^{①②}	○	M10
				VPD2-10R(A)⑬-M5⑨ ^{①②}	—	
				VPD2-15R(A)⑬-M5⑨ ^{①②}	—	
	ø3	3 10 15 20	M5×0.8	VPD3-3R(A)⑬-M5⑨ ^{①②}	○	M10
				VPD3-10R(A)⑬-M5⑨ ^{①②}	—	
				VPD3-15R(A)⑬-M5⑨ ^{①②}	—	
	ø4	3 10 15 20	M5×0.8	VPD4-3R(A)⑬-M5⑨ ^{①②}	○	M10
				VPD4-10R(A)⑬-M5⑨ ^{①②}	—	
				VPD4-15R(A)⑬-M5⑨ ^{①②}	—	
	ø6	3 10 15 20	M5×0.8	VPD6-3R(A)⑬-M5⑨ ^{①②}	○	M10
				VPD6-10R(A)⑬-M5⑨ ^{①②}	—	
				VPD6-15R(A)⑬-M5⑨ ^{①②}	—	
	ø8	3 10 15 20	M5×0.8	VPD8-3R(A)⑬-M5⑨ ^{①②}	○	M10
				VPD8-10R(A)⑬-M5⑨ ^{①②}	—	
				VPD8-15R(A)⑬-M5⑨ ^{①②}	—	
	ø10	6 10 15 20	M6×1	VPD10-6R(A)⑬-M6⑨ ^{①②}	○	M10
				VPD10-10R(A)⑬-M6⑨ ^{①②}	—	
				VPD10-15R(A)⑬-M6⑨ ^{①②}	—	
	ø15	6 10 15 20	M6×1	VPD15-6R(A)⑬-M6⑨ ^{①②}	○	M10
				VPD15-10R(A)⑬-M6⑨ ^{①②}	—	
				VPD15-15R(A)⑬-M6⑨ ^{①②}	—	
	ø20	6 10 15 20	M6×1	VPD20-6R(A)⑬-M6⑨ ^{①②}	○	M10
				VPD20-10R(A)⑬-M6⑨ ^{①②}	—	
				VPD20-15R(A)⑬-M6⑨ ^{①②}	—	
	ø25	6 10 15 20	M6×1	VPD25-6R(A)⑬-M6⑨ ^{①②}	○	M10
				VPD25-10R(A)⑬-M6⑨ ^{①②}	—	
				VPD25-15R(A)⑬-M6⑨ ^{①②}	—	
	ø30	6 10 15 20	M6×1	VPD30-6R(A)⑬-M6⑨ ^{①②}	○	M10
				VPD30-10R(A)⑬-M6⑨ ^{①②}	—	
				VPD30-15R(A)⑬-M6⑨ ^{①②}	—	
	ø40	6 10 15 20	M6×1	VPD40-6R(A)⑬-M6⑨ ^{①②}	○	M10
				VPD40-10R(A)⑬-M6⑨ ^{①②}	—	
				VPD40-15R(A)⑬-M6⑨ ^{①②}	—	
	ø50	6 10 15 20	M6×1	VPD50-6R(A)⑬-M6⑨ ^{①②}	○	M10
				VPD50-10R(A)⑬-M6⑨ ^{①②}	—	
				VPD50-15R(A)⑬-M6⑨ ^{①②}	—	
	ø60	10	G1/8	VPD60-10R(A)⑬-G1/8⑬ ^{①②}	○	M10
				VPD80-10R(A)⑬-G1/8⑬ ^{①②}	—	
				VPD100-10R(A)⑬-G1/8⑬ ^{①②}	—	
	ø150	20	G1/4	VPD150-20R(A)⑬-G2⑬ ^{①②}	○	M20
				VPD200-20R(A)⑬-G2⑬ ^{①②}	—	
				VPD200-20R(A)⑬-G2⑬ ^{①②}	—	
	ø60	10	NPT1/8	VPD60-10R(A)⑬-N1⑬ ^{①②}	—	M10
				VPD80-10R(A)⑬-N1⑬ ^{①②}	—	
				VPD100-10R(A)⑬-N1⑬ ^{①②}	—	
	ø100	20	NPT1/4	VPD100-20R(A)⑬-N2⑬ ^{①②}	—	M20
				VPD150-20R(A)⑬-N2⑬ ^{①②}	—	
				VPD200-20R(A)⑬-N2⑬ ^{①②}	—	

Vacuum Pad Standard Type

RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad dia. (mm)	Stroke (mm)	Tube O.D. (mm)	Model code	Connection config. code	Pad dia. (mm)	Stroke (mm)	Tube O.D. (inch)	Model code	Connection config. code
Spring type, Side port, Push-in fitting, No cover VPOD  Pad dia.  to 	ø6	20	ø3	VPOD6-20R(A)617-3J	TB	ø6	20	ø1/8	VPOD6-20R(A)617-1/8J	TB
			ø4	VPOD6-20R(A)617-4J				ø5/32	VPOD6-20R(A)617-5/32J	
			ø6	VPOD6-20R(A)617-6J				ø1/4	VPOD6-20R(A)617-1/4J	
		30	ø3	VPOD6-30R(A)617-3J			30	ø1/8	VPOD6-30R(A)617-1/8J	
			ø4	VPOD6-30R(A)617-4J				ø5/32	VPOD6-30R(A)617-5/32J	
			ø6	VPOD6-30R(A)617-6J				ø1/4	VPOD6-30R(A)617-1/4J	
		40	ø3	VPOD6-40R(A)617-3J			40	ø1/8	VPOD6-40R(A)617-1/8J	
			ø4	VPOD6-40R(A)617-4J				ø5/32	VPOD6-40R(A)617-5/32J	
			ø6	VPOD6-40R(A)617-6J				ø1/4	VPOD6-40R(A)617-1/4J	
		50	ø3	VPOD6-50R(A)617-3J			50	ø1/8	VPOD6-50R(A)617-1/8J	
			ø4	VPOD6-50R(A)617-4J				ø5/32	VPOD6-50R(A)617-5/32J	
			ø6	VPOD6-50R(A)617-6J				ø1/4	VPOD6-50R(A)617-1/4J	
	ø8	20	ø3	VPOD8-20R(A)617-3J	TB	ø8	20	ø1/8	VPOD8-20R(A)617-1/8J	TB
			ø4	VPOD8-20R(A)617-4J				ø5/32	VPOD8-20R(A)617-5/32J	
			ø6	VPOD8-20R(A)617-6J				ø1/4	VPOD8-20R(A)617-1/4J	
		30	ø3	VPOD8-30R(A)617-3J			30	ø1/8	VPOD8-30R(A)617-1/8J	
			ø4	VPOD8-30R(A)617-4J				ø5/32	VPOD8-30R(A)617-5/32J	
			ø6	VPOD8-30R(A)617-6J				ø1/4	VPOD8-30R(A)617-1/4J	
		40	ø3	VPOD8-40R(A)617-3J			40	ø1/8	VPOD8-40R(A)617-1/8J	
			ø4	VPOD8-40R(A)617-4J				ø5/32	VPOD8-40R(A)617-5/32J	
			ø6	VPOD8-40R(A)617-6J				ø1/4	VPOD8-40R(A)617-1/4J	
		50	ø3	VPOD8-50R(A)617-3J			50	ø1/8	VPOD8-50R(A)617-1/8J	
			ø4	VPOD8-50R(A)617-4J				ø5/32	VPOD8-50R(A)617-5/32J	
			ø6	VPOD8-50R(A)617-6J				ø1/4	VPOD8-50R(A)617-1/4J	
	ø10	20	ø3	VPOD10-20R(A)617-3J	TB	ø10	20	ø1/8	VPOD10-20R(A)617-1/8J	TB
			ø4	VPOD10-20R(A)617-4J				ø5/32	VPOD10-20R(A)617-5/32J	
			ø6	VPOD10-20R(A)617-6J				ø1/4	VPOD10-20R(A)617-1/4J	
		30	ø3	VPOD10-30R(A)617-3J			30	ø1/8	VPOD10-30R(A)617-1/8J	
			ø4	VPOD10-30R(A)617-4J				ø5/32	VPOD10-30R(A)617-5/32J	
			ø6	VPOD10-30R(A)617-6J				ø1/4	VPOD10-30R(A)617-1/4J	
		40	ø3	VPOD10-40R(A)617-3J			40	ø1/8	VPOD10-40R(A)617-1/8J	
			ø4	VPOD10-40R(A)617-4J				ø5/32	VPOD10-40R(A)617-5/32J	
			ø6	VPOD10-40R(A)617-6J				ø1/4	VPOD10-40R(A)617-1/4J	
		50	ø3	VPOD10-50R(A)617-3J			50	ø1/8	VPOD10-50R(A)617-1/8J	
			ø4	VPOD10-50R(A)617-4J				ø5/32	VPOD10-50R(A)617-5/32J	
			ø6	VPOD10-50R(A)617-6J				ø1/4	VPOD10-50R(A)617-1/4J	
	ø15	20	ø3	VPOD15-20R(A)617-3J	TB	ø15	20	ø1/8	VPOD15-20R(A)617-1/8J	TB
			ø4	VPOD15-20R(A)617-4J				ø5/32	VPOD15-20R(A)617-5/32J	
			ø6	VPOD15-20R(A)617-6J				ø1/4	VPOD15-20R(A)617-1/4J	
		30	ø3	VPOD15-30R(A)617-3J			30	ø1/8	VPOD15-30R(A)617-1/8J	
			ø4	VPOD15-30R(A)617-4J				ø5/32	VPOD15-30R(A)617-5/32J	
			ø6	VPOD15-30R(A)617-6J				ø1/4	VPOD15-30R(A)617-1/4J	
		40	ø3	VPOD15-40R(A)617-3J			40	ø1/8	VPOD15-40R(A)617-1/8J	
			ø4	VPOD15-40R(A)617-4J				ø5/32	VPOD15-40R(A)617-5/32J	
			ø6	VPOD15-40R(A)617-6J				ø1/4	VPOD15-40R(A)617-1/4J	
		50	ø3	VPOD15-50R(A)617-3J			50	ø1/8	VPOD15-50R(A)617-1/8J	
			ø4	VPOD15-50R(A)617-4J				ø5/32	VPOD15-50R(A)617-5/32J	
			ø6	VPOD15-50R(A)617-6J				ø1/4	VPOD15-50R(A)617-1/4J	

- Notes**
- *1. Deep type pad can be selected for the models with pad type code: R (A) in the model code. Please select "R" for general type and "A" for deep type pad.
 - *2. Barb fitting type holders are also available. Contact us for the details.

Packaging specifications
1 pc./bag

Options
⑦: Surface treatment (Fiber surface, DLC. coating, Reformed surface, and Fluoro-coating)



RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad dia. (mm)	Stroke (mm)	Tube O.D. (mm)	Model code	Connection config. code	Pad dia. (mm)	Stroke (mm)	Tube O.D. (inch)	Model code	Connection config. code
Spring type, Side port, Push-in fitting, No cover VPOD  Pad dia.  to 	ø20	20	ø3	VPOD20-20R(A)617-3J	TB	ø20	20	ø1/8	VPOD20-20R(A)617-1/8J	TB
			ø4	VPOD20-20R(A)617-4J				ø5/32	VPOD20-20R(A)617-5/32J	
			ø6	VPOD20-20R(A)617-6J				ø1/4	VPOD20-20R(A)617-1/4J	
		30	ø3	VPOD20-30R(A)617-3J			30	ø1/8	VPOD20-30R(A)617-1/8J	
			ø4	VPOD20-30R(A)617-4J				ø5/32	VPOD20-30R(A)617-5/32J	
			ø6	VPOD20-30R(A)617-6J				ø1/4	VPOD20-30R(A)617-1/4J	
		40	ø3	VPOD20-40R(A)617-3J			40	ø1/8	VPOD20-40R(A)617-1/8J	
			ø4	VPOD20-40R(A)617-4J				ø5/32	VPOD20-40R(A)617-5/32J	
			ø6	VPOD20-40R(A)617-6J				ø1/4	VPOD20-40R(A)617-1/4J	
		50	ø3	VPOD20-50R(A)617-3J			50	ø1/8	VPOD20-50R(A)617-1/8J	
			ø4	VPOD20-50R(A)617-4J				ø5/32	VPOD20-50R(A)617-5/32J	
			ø6	VPOD20-50R(A)617-6J				ø1/4	VPOD20-50R(A)617-1/4J	
	ø25	20	ø3	VPOD25-20R(A)617-3J	TB	ø25	20	ø1/8	VPOD25-20R(A)617-1/8J	TB
			ø4	VPOD25-20R(A)617-4J				ø5/32	VPOD25-20R(A)617-5/32J	
			ø6	VPOD25-20R(A)617-6J				ø1/4	VPOD25-20R(A)617-1/4J	
		30	ø3	VPOD25-30R(A)617-3J			30	ø1/8	VPOD25-30R(A)617-1/8J	
			ø4	VPOD25-30R(A)617-4J				ø5/32	VPOD25-30R(A)617-5/32J	
			ø6	VPOD25-30R(A)617-6J				ø1/4	VPOD25-30R(A)617-1/4J	
		40	ø3	VPOD25-40R(A)617-3J			40	ø1/8	VPOD25-40R(A)617-1/8J	
			ø4	VPOD25-40R(A)617-4J				ø5/32	VPOD25-40R(A)617-5/32J	
			ø6	VPOD25-40R(A)617-6J				ø1/4	VPOD25-40R(A)617-1/4J	
		50	ø3	VPOD25-50R(A)617-3J			50	ø1/8	VPOD25-50R(A)617-1/8J	
			ø4	VPOD25-50R(A)617-4J				ø5/32	VPOD25-50R(A)617-5/32J	
			ø6	VPOD25-50R(A)617-6J				ø1/4	VPOD25-50R(A)617-1/4J	
ø30	ø30	20	ø3	VPOD30-20R(A)617-3J	TB	ø30	20	ø1/8	VPOD30-20R(A)617-1/8J	TB
			ø4	VPOD30-20R(A)617-4J				ø5/32	VPOD30-20R(A)617-5/32J	
			ø6	VPOD30-20R(A)617-6J				ø1/4	VPOD30-20R(A)617-1/4J	
		30	ø3	VPOD30-30R(A)617-3J			30	ø1/8	VPOD30-30R(A)617-1/8J	
			ø4	VPOD30-30R(A)617-4J				ø5/32	VPOD30-30R(A)617-5/32J	
			ø6	VPOD30-30R(A)617-6J				ø1/4	VPOD30-30R(A)617-1/4J	
		40	ø3	VPOD30-40R(A)617-3J			40	ø1/8	VPOD30-40R(A)617-1/8J	
			ø4	VPOD30-40R(A)617-4J				ø5/32	VPOD30-40R(A)617-5/32J	
			ø6	VPOD30-40R(A)617-6J				ø1/4	VPOD30-40R(A)617-1/4J	
		50	ø3	VPOD30-50R(A)617-3J			50	ø1/8	VPOD30-50R(A)617-1/8J	
			ø4	VPOD30-50R(A)617-4J				ø5/32	VPOD30-50R(A)617-5/32J	
			ø6	VPOD30-50R(A)617-6J				ø1/4	VPOD30-50R(A)617-1/4J	
	ø40	20	ø3	VPOD40-20R(A)617-3J	TB	ø40	20	ø1/8	VPOD40-20R(A)617-1/8J	TB
ø40	ø40	20	ø4	VPOD40-20R(A)617-4J	TB	ø40	20	ø5/32	VPOD40-20R(A)617-5/32J	TB
			ø6	VPOD40-20R(A)617-6J				ø1/4	VPOD40-20R(A)617-1/4J	
			ø3	VPOD40-30R(A)617-3J				ø1/8	VPOD40-30R(A)617-1/8J	
		30	ø4	VPOD40-30R(A)617-4J			30	ø5/32	VPOD40-30R(A)617-5/32J	
			ø6	VPOD40-30R(A)617-6J				ø1/4	VPOD40-30R(A)617-1/4J	
			ø3	VPOD40-40R(A)617-3J				ø1/8	VPOD40-40R(A)617-1/8J	
		40	ø4	VPOD40-40R(A)617-4J			40	ø5/32	VPOD40-40R(A)617-5/32J	
			ø6	VPOD40-40R(A)617-6J				ø1/4	VPOD40-40R(A)617-1/4J	
			ø3	VPOD40-50R(A)617-3J				ø1/8	VPOD40-50R(A)617-1/8J	
		50	ø4	VPOD40-50R(A)617-4J			50	ø5/32	VPOD40-50R(A)617-5/32J	
			ø6	VPOD40-50R(A)617-6J				ø1/4	VPOD40-50R(A)617-1/4J	
			ø3	VPOD50-20R(A)617-3J				ø1/8	VPOD50-20R(A)617-1/8J	
	ø50	ø50	20	ø4	VPOD50-20R(A)617-4J	TB	ø50	20	ø5/32	VPOD50-20R(A)617-5/32J
ø6				VPOD50-20R(A)617-6J	ø1/4				VPOD50-20R(A)617-1/4J	
ø3				VPOD50-30R(A)617-3J	ø1/8				VPOD50-30R(A)617-1/8J	
30			ø4	VPOD50-30R(A)617-4J	30			ø5/32	VPOD50-30R(A)617-5/32J	
			ø6	VPOD50-30R(A)617-6J				ø1/4	VPOD50-30R(A)617-1/4J	
			ø3	VPOD50-40R(A)617-3J				ø1/8	VPOD50-40R(A)617-1/8J	
40			ø4	VPOD50-40R(A)617-4J	40			ø5/32	VPOD50-40R(A)617-5/32J	
			ø6	VPOD50-40R(A)617-6J				ø1/4	VPOD50-40R(A)617-1/4J	
			ø3	VPOD50-50R(A)617-3J				ø1/8	VPOD50-50R(A)617-1/8J	
50			ø4	VPOD50-50R(A)617-4J	50			ø5/32	VPOD50-50R(A)617-5/32J	
			ø6	VPOD50-50R(A)617-6J				ø1/4	VPOD50-50R(A)617-1/4J	

Vacuum Pad Standard Type

RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad dia. (mm)	Stroke (mm)	Male thread size	Model code	Connection config. code
Spring type, Side port, Female thread, No cover VPOD 	ø6	20	M6×1	VPOD6-20R(6)T7-M6	T8
		30		VPOD6-30R(6)T7-M6	
		40		VPOD6-40R(6)T7-M6	
		50		VPOD6-50R(6)T7-M6	
	ø8	20	M6×1	VPOD8-20R(8)T7-M6	T8
		30		VPOD8-30R(8)T7-M6	
		40		VPOD8-40R(8)T7-M6	
		50		VPOD8-50R(8)T7-M6	
	ø10	20	M6×1	VPOD10-20R(10)T7-M6	M4
		30		VPOD10-30R(10)T7-M6	
		40		VPOD10-40R(10)T7-M6	
		50		VPOD10-50R(10)T7-M6	
	ø15	20	M6×1	VPOD15-20R(A)(15)T7-M6	M4
		30		VPOD15-30R(A)(15)T7-M6	
		40		VPOD15-40R(A)(15)T7-M6	
		50		VPOD15-50R(A)(15)T7-M6	
	ø20	20	M6×1	VPOD20-20R(A)(20)T7-M6	M6
		30		VPOD20-30R(A)(20)T7-M6	
		40		VPOD20-40R(A)(20)T7-M6	
		50		VPOD20-50R(A)(20)T7-M6	
	ø25	20	M6×1	VPOD25-20R(A)(25)T7-M6	M6
		30		VPOD25-30R(A)(25)T7-M6	
		40		VPOD25-40R(A)(25)T7-M6	
		50		VPOD25-50R(A)(25)T7-M6	
	ø30	20	M6×1	VPOD30-20R(A)(30)T7-M6	M6
		30		VPOD30-30R(A)(30)T7-M6	
		40		VPOD30-40R(A)(30)T7-M6	
		50		VPOD30-50R(A)(30)T7-M6	
	ø40	20	M6×1	VPOD40-20R(A)(40)T7-M6	M6
		30		VPOD40-30R(A)(40)T7-M6	
		40		VPOD40-40R(A)(40)T7-M6	
		50		VPOD40-50R(A)(40)T7-M6	
	ø50	20	M6×1	VPOD50-20R(A)(50)T7-M6	M6
		30		VPOD50-30R(A)(50)T7-M6	
		40		VPOD50-40R(A)(50)T7-M6	
		50		VPOD50-50R(A)(50)T7-M6	

Notes
*Deep type pad can be selected for the models with pad type code: R (A) in the model code. Please select "R" for general type and "A" for deep type pad.

CAD
CAD data is available
at PISCO website.

Packaging
Packaging specifications
1 pc./bag

Options
T7: Surface treatment (Fiber surface, DLC. coating, Reformed surface, and Fluoro-coating)



RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad dia. (mm)	Stroke (mm)	Tube O.D. (mm)	Model code	Connection config. code	Pad dia. (mm)	Stroke (mm)	Tube O.D. (inch)	Model code	Connection config. code
Spring type, Side port, Push-in fitting, Low dust emission VPLFD 	ø0.7	5	ø3	VPLFD0.7-5RM(0.7)T7-3J	T4	ø0.7	5	ø1/8	VPLFD0.7-5RM(0.7)T7-V6J	T4
			ø4	VPLFD0.7-5RM(0.7)T7-4J				ø5/32	VPLFD0.7-5RM(0.7)T7-5J	
		10	ø3	VPLFD0.7-10RM(0.7)T7-3J			10	ø1/8	VPLFD0.7-10RM(0.7)T7-V6J	
			ø4	VPLFD0.7-10RM(0.7)T7-4J				ø5/32	VPLFD0.7-10RM(0.7)T7-5J	
		15	ø3	VPLFD0.7-15RM(0.7)T7-3J			15	ø1/8	VPLFD0.7-15RM(0.7)T7-V6J	
			ø4	VPLFD0.7-15RM(0.7)T7-4J				ø5/32	VPLFD0.7-15RM(0.7)T7-5J	
		20	ø3	VPLFD0.7-20RM(0.7)T7-3J			20	ø1/8	VPLFD0.7-20RM(0.7)T7-V6J	
			ø4	VPLFD0.7-20RM(0.7)T7-4J				ø5/32	VPLFD0.7-20RM(0.7)T7-5J	
	ø1	5	ø3	VPLFD1-5RM(1)T7-3J	T4	ø1	5	ø1/8	VPLFD1-5RM(1)T7-V6J	T4
			ø4	VPLFD1-5RM(1)T7-4J				ø5/32	VPLFD1-5RM(1)T7-5J	
		10	ø3	VPLFD1-10RM(1)T7-3J			10	ø1/8	VPLFD1-10RM(1)T7-V6J	
			ø4	VPLFD1-10RM(1)T7-4J				ø5/32	VPLFD1-10RM(1)T7-5J	
		15	ø3	VPLFD1-15RM(1)T7-3J			15	ø1/8	VPLFD1-15RM(1)T7-V6J	
			ø4	VPLFD1-15RM(1)T7-4J				ø5/32	VPLFD1-15RM(1)T7-5J	
		20	ø3	VPLFD1-20RM(1)T7-3J			20	ø1/8	VPLFD1-20RM(1)T7-V6J	
			ø4	VPLFD1-20RM(1)T7-4J				ø5/32	VPLFD1-20RM(1)T7-5J	
	ø1.5	5	ø3	VPLFD1.5-5RM(1.5)T7-3J	T4	ø1.5	5	ø1/8	VPLFD1.5-5RM(1.5)T7-V6J	T4
			ø4	VPLFD1.5-5RM(1.5)T7-4J				ø5/32	VPLFD1.5-5RM(1.5)T7-5J	
		10	ø3	VPLFD1.5-10RM(1.5)T7-3J			10	ø1/8	VPLFD1.5-10RM(1.5)T7-V6J	
			ø4	VPLFD1.5-10RM(1.5)T7-4J				ø5/32	VPLFD1.5-10RM(1.5)T7-5J	
		15	ø3	VPLFD1.5-15RM(1.5)T7-3J			15	ø1/8	VPLFD1.5-15RM(1.5)T7-V6J	
			ø4	VPLFD1.5-15RM(1.5)T7-4J				ø5/32	VPLFD1.5-15RM(1.5)T7-5J	
		20	ø3	VPLFD1.5-20RM(1.5)T7-3J			20	ø1/8	VPLFD1.5-20RM(1.5)T7-V6J	
			ø4	VPLFD1.5-20RM(1.5)T7-4J				ø5/32	VPLFD1.5-20RM(1.5)T7-5J	
	ø2	5	ø3	VPLFD2-5RM(2)T7-3J	T4	ø2	5	ø1/8	VPLFD2-5RM(2)T7-V6J	T4
			ø4	VPLFD2-5RM(2)T7-4J				ø5/32	VPLFD2-5RM(2)T7-5J	
		10	ø3	VPLFD2-10RM(2)T7-3J			10	ø1/8	VPLFD2-10RM(2)T7-V6J	
			ø4	VPLFD2-10RM(2)T7-4J				ø5/32	VPLFD2-10RM(2)T7-5J	
		15	ø3	VPLFD2-15RM(2)T7-3J			15	ø1/8	VPLFD2-15RM(2)T7-V6J	
			ø4	VPLFD2-15RM(2)T7-4J				ø5/32	VPLFD2-15RM(2)T7-5J	
		20	ø3	VPLFD2-20RM(2)T7-3J			20	ø1/8	VPLFD2-20RM(2)T7-V6J	
			ø4	VPLFD2-20RM(2)T7-4J				ø5/32	VPLFD2-20RM(2)T7-5J	
	ø3	5	ø3	VPLFD3-5RM(3)T7-3J	T4	ø3	5	ø1/8	VPLFD3-5RM(3)T7-V6J	T4
			ø4	VPLFD3-5RM(3)T7-4J				ø5/32	VPLFD3-5RM(3)T7-5J	
		10	ø3	VPLFD3-10RM(3)T7-3J			10	ø1/8	VPLFD3-10RM(3)T7-V6J	
			ø4	VPLFD3-10RM(3)T7-4J				ø5/32	VPLFD3-10RM(3)T7-5J	
		15	ø3	VPLFD3-15RM(3)T7-3J			15	ø1/8	VPLFD3-15RM(3)T7-V6J	
			ø4	VPLFD3-15RM(3)T7-4J				ø5/32	VPLFD3-15RM(3)T7-5J	
		20	ø3	VPLFD3-20RM(3)T7-3J			20	ø1/8	VPLFD3-20RM(3)T7-V6J	
			ø4	VPLFD3-20RM(3)T7-4J				ø5/32	VPLFD3-20RM(3)T7-5J	
	ø4	5	ø3	VPLFD4-5RM(4)T7-3J	T4	ø4	5	ø1/8	VPLFD4-5RM(4)T7-V6J	T4
			ø4	VPLFD4-5RM(4)T7-4J				ø5/32	VPLFD4-5RM(4)T7-5J	
		10	ø3	VPLFD4-10RM(4)T7-3J			10	ø1/8	VPLFD4-10RM(4)T7-V6J	
			ø4	VPLFD4-10RM(4)T7-4J				ø5/32	VPLFD4-10RM(4)T7-5J	
		15	ø3	VPLFD4-15RM(4)T7-3J			15	ø1/8	VPLFD4-15RM(4)T7-V6J	
			ø4	VPLFD4-15RM(4)T7-4J				ø5/32	VPLFD4-15RM(4)T7-5J	
		20	ø3	VPLFD4-20RM(4)T7-3J			20	ø1/8	VPLFD4-20RM(4)T7-V6J	
			ø4	VPLFD4-20RM(4)T7-4J				ø5/32	VPLFD4-20RM(4)T7-5J	

Notes
*Barb fitting type holders are also available. Contact us for the details.

Packaging
Packaging specifications
1 pc./bag

Options
T7: Surface treatment (DLC. coating, and Fluoro-coating)



Vacuum Pad Standard Type

RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad dia. (mm)	Stroke (mm)	Tube O.D. (mm)	Model code	Connection config. code	Pad dia. (mm)	Stroke (mm)	Tube O.D. (inch)	Model code	Connection config. code
Spring type, Side port, Push-in fitting, Low dust emission VPLFD 	ø6	5	ø3	VPLFD6-5R(A)617-3J	T8	ø6	5	ø1/8	VPLFD6-5R(A)617-1/6J	T8
			ø4	VPLFD6-5R(A)617-4J				ø5/32	VPLFD6-5R(A)617-4/32J	
		10	ø3	VPLFD6-10R(A)617-3J			10	ø1/8	VPLFD6-10R(A)617-1/6J	
			ø4	VPLFD6-10R(A)617-4J				ø5/32	VPLFD6-10R(A)617-4/32J	
		15	ø3	VPLFD6-15R(A)617-3J			15	ø1/8	VPLFD6-15R(A)617-1/6J	
			ø4	VPLFD6-15R(A)617-4J				ø5/32	VPLFD6-15R(A)617-4/32J	
		20	ø3	VPLFD6-20R(A)617-3J			20	ø1/8	VPLFD6-20R(A)617-1/6J	
			ø4	VPLFD6-20R(A)617-4J				ø5/32	VPLFD6-20R(A)617-4/32J	
	ø8	5	ø3	VPLFD8-5R(A)617-3J	T8	ø8	5	ø1/8	VPLFD8-5R(A)617-1/6J	T8
			ø4	VPLFD8-5R(A)617-4J				ø5/32	VPLFD8-5R(A)617-4/32J	
		10	ø3	VPLFD8-10R(A)617-3J			10	ø1/8	VPLFD8-10R(A)617-1/6J	
			ø4	VPLFD8-10R(A)617-4J				ø5/32	VPLFD8-10R(A)617-4/32J	
		15	ø3	VPLFD8-15R(A)617-3J			15	ø1/8	VPLFD8-15R(A)617-1/6J	
			ø4	VPLFD8-15R(A)617-4J				ø5/32	VPLFD8-15R(A)617-4/32J	
		20	ø3	VPLFD8-20R(A)617-3J			20	ø1/8	VPLFD8-20R(A)617-1/6J	
			ø4	VPLFD8-20R(A)617-4J				ø5/32	VPLFD8-20R(A)617-4/32J	
	ø10	5	ø3	VPLFD10-5R(A)617-3J	M4	ø10	5	ø1/8	VPLFD10-5R(A)617-1/6J	M4
			ø4	VPLFD10-5R(A)617-4J				ø5/32	VPLFD10-5R(A)617-4/32J	
		10	ø3	VPLFD10-10R(A)617-3J			10	ø1/8	VPLFD10-10R(A)617-1/6J	
			ø4	VPLFD10-10R(A)617-4J				ø5/32	VPLFD10-10R(A)617-4/32J	
		15	ø3	VPLFD10-15R(A)617-3J			15	ø1/8	VPLFD10-15R(A)617-1/6J	
			ø4	VPLFD10-15R(A)617-4J				ø5/32	VPLFD10-15R(A)617-4/32J	
		20	ø3	VPLFD10-20R(A)617-3J			20	ø1/8	VPLFD10-20R(A)617-1/6J	
			ø4	VPLFD10-20R(A)617-4J				ø5/32	VPLFD10-20R(A)617-4/32J	
	ø15	5	ø3	VPLFD15-5R(A)617-3J	M4	ø15	5	ø1/8	VPLFD15-5R(A)617-1/6J	M4
			ø4	VPLFD15-5R(A)617-4J				ø5/32	VPLFD15-5R(A)617-4/32J	
		10	ø3	VPLFD15-10R(A)617-3J			10	ø1/8	VPLFD15-10R(A)617-1/6J	
			ø4	VPLFD15-10R(A)617-4J				ø5/32	VPLFD15-10R(A)617-4/32J	
		15	ø3	VPLFD15-15R(A)617-3J			15	ø1/8	VPLFD15-15R(A)617-1/6J	
			ø4	VPLFD15-15R(A)617-4J				ø5/32	VPLFD15-15R(A)617-4/32J	
		20	ø3	VPLFD15-20R(A)617-3J			20	ø1/8	VPLFD15-20R(A)617-1/6J	
			ø4	VPLFD15-20R(A)617-4J				ø5/32	VPLFD15-20R(A)617-4/32J	

- Notes**
- *1 Deep type pad can be selected for the models with pad type code: R (A) in the model code. Please select "R" for general type and "A" for deep type pad.
 - *2 Barb fitting type holders are also available. Contact us for the details.



Packaging specifications
1 pc./bag

Options
①: Surface treatment (Fiber surface, DLC. coating, Reformed surface, and Fluoro-coating)



RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad dia. (mm)	Stroke (mm)	Tube O.D. (mm)	Model code	Connection config. code	Pad dia. (mm)	Stroke (mm)	Tube O.D. (inch)	Model code	Connection config. code
Spring type, Side port, Push-in fitting, Low dust emission VPLFD 	ø20	5	ø3	VPLFD20-5R(A)617-3J	T8	ø20	5	ø1/8	VPLFD20-5R(A)617-1/6J	T8
			ø4	VPLFD20-5R(A)617-4J				ø5/32	VPLFD20-5R(A)617-4/32J	
		10	ø6	VPLFD20-5R(A)617-6J			10	ø1/4	VPLFD20-5R(A)617-1/4J	
			ø3	VPLFD20-10R(A)617-3J				ø1/8	VPLFD20-10R(A)617-1/6J	
		15	ø4	VPLFD20-10R(A)617-4J			15	ø5/32	VPLFD20-10R(A)617-4/32J	
			ø6	VPLFD20-10R(A)617-6J				ø1/4	VPLFD20-10R(A)617-1/4J	
		20	ø3	VPLFD20-15R(A)617-3J			20	ø1/8	VPLFD20-15R(A)617-1/6J	
			ø4	VPLFD20-15R(A)617-4J				ø5/32	VPLFD20-15R(A)617-4/32J	
	ø25	5	ø6	VPLFD20-20R(A)617-6J	M6	ø25	5	ø1/4	VPLFD20-20R(A)617-1/4J	M6
			ø3	VPLFD25-5R(A)617-3J				ø1/8	VPLFD25-5R(A)617-1/6J	
		10	ø4	VPLFD25-5R(A)617-4J			10	ø5/32	VPLFD25-5R(A)617-4/32J	
			ø6	VPLFD25-5R(A)617-6J				ø1/4	VPLFD25-5R(A)617-1/4J	
		15	ø3	VPLFD25-10R(A)617-3J			15	ø1/8	VPLFD25-10R(A)617-1/6J	
			ø4	VPLFD25-10R(A)617-4J				ø5/32	VPLFD25-10R(A)617-4/32J	
		20	ø6	VPLFD25-15R(A)617-6J			20	ø1/4	VPLFD25-15R(A)617-1/4J	
			ø3	VPLFD25-15R(A)617-3J				ø1/8	VPLFD25-15R(A)617-1/6J	
	ø30	5	ø3	VPLFD30-5R(A)617-3J	M6	ø30	5	ø1/8	VPLFD30-5R(A)617-1/6J	M6
			ø4	VPLFD30-5R(A)617-4J				ø5/32	VPLFD30-5R(A)617-4/32J	
		10	ø6	VPLFD30-5R(A)617-6J			10	ø1/4	VPLFD30-5R(A)617-1/4J	
			ø3	VPLFD30-10R(A)617-3J				ø1/8	VPLFD30-10R(A)617-1/6J	
		15	ø4	VPLFD30-10R(A)617-4J			15	ø5/32	VPLFD30-10R(A)617-4/32J	
			ø6	VPLFD30-10R(A)617-6J				ø1/4	VPLFD30-10R(A)617-1/4J	
		20	ø3	VPLFD30-15R(A)617-3J			20	ø1/8	VPLFD30-15R(A)617-1/6J	
			ø4	VPLFD30-15R(A)617-4J				ø5/32	VPLFD30-15R(A)617-4/32J	
	ø40	5	ø6	VPLFD30-20R(A)617-6J	M6	ø40	5	ø1/4	VPLFD30-20R(A)617-1/4J	M6
			ø3	VPLFD40-5R(A)617-3J				ø1/8	VPLFD40-5R(A)617-1/6J	
		10	ø4	VPLFD40-5R(A)617-4J			10	ø5/32	VPLFD40-5R(A)617-4/32J	
			ø6	VPLFD40-5R(A)617-6J				ø1/4	VPLFD40-5R(A)617-1/4J	
		15	ø3	VPLFD40-10R(A)617-3J			15	ø1/8	VPLFD40-10R(A)617-1/6J	
			ø4	VPLFD40-10R(A)617-4J				ø5/32	VPLFD40-10R(A)617-4/32J	
		20	ø6	VPLFD40-10R(A)617-6J			20	ø1/4	VPLFD40-10R(A)617-1/4J	
			ø3	VPLFD40-15R(A)617-3J				ø1/8	VPLFD40-15R(A)617-1/6J	
	ø50	5	ø4	VPLFD40-20R(A)617-4J	M6	ø50	5	ø5/32	VPLFD40-20R(A)617-4/32J	M6
			ø6	VPLFD40-20R(A)617-6J				ø1/4	VPLFD40-20R(A)617-1/4J	
		10	ø3	VPLFD50-5R(A)617-3J			10	ø1/8	VPLFD50-5R(A)617-1/6J	
			ø4	VPLFD50-5R(A)617-4J				ø5/32	VPLFD50-5R(A)617-4/32J	
		15	ø6	VPLFD50-10R(A)617-6J			15	ø1/4	VPLFD50-10R(A)617-1/4J	
			ø3	VPLFD50-10R(A)617-3J				ø1/8	VPLFD50-10R(A)617-1/6J	
		20	ø4	VPLFD50-15R(A)617-4J			20	ø5/32	VPLFD50-15R(A)617-4/32J	
			ø6	VPLFD50-15R(A)617-6J				ø1/4	VPLFD50-15R(A)617-1/4J	

RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad dia. (mm)	Stroke (mm)	Male thread size	Model code	Connection config. code
Spring type, Side port, Female thread, Low dust emission VPLFD 	ø0.7	5	M5×0.8	VPLFD0.7-5RM[6][7]-M5	T4
		10	M5×0.8	VPLFD0.7-10RM[6][7]-M5	
		15	M5×0.8	VPLFD0.7-15RM[6][7]-M5	
		20	M5×0.8	VPLFD0.7-20RM[6][7]-M5	
	ø1	5	M5×0.8	VPLFD1-5RM[6][7]-M5	
		10	M5×0.8	VPLFD1-10RM[6][7]-M5	
		15	M5×0.8	VPLFD1-15RM[6][7]-M5	
		20	M5×0.8	VPLFD1-20RM[6][7]-M5	
	ø1.5	5	M5×0.8	VPLFD1.5-5RM[6][7]-M5	
		10	M5×0.8	VPLFD1.5-10RM[6][7]-M5	
		15	M5×0.8	VPLFD1.5-15RM[6][7]-M5	
		20	M5×0.8	VPLFD1.5-20RM[6][7]-M5	
	ø2	5	M5×0.8	VPLFD2-5RM[6][7]-M5	T8
		10	M5×0.8	VPLFD2-10RM[6][7]-M5	
		15	M5×0.8	VPLFD2-15RM[6][7]-M5	
		20	M5×0.8	VPLFD2-20RM[6][7]-M5	
	ø3	5	M5×0.8	VPLFD3-5RM[6][7]-M5	
		10	M5×0.8	VPLFD3-10RM[6][7]-M5	
		15	M5×0.8	VPLFD3-15RM[6][7]-M5	
		20	M5×0.8	VPLFD3-20RM[6][7]-M5	
	ø4	5	M5×0.8	VPLFD4-5RM[6][7]-M5	
		10	M5×0.8	VPLFD4-10RM[6][7]-M5	
		15	M5×0.8	VPLFD4-15RM[6][7]-M5	
		20	M5×0.8	VPLFD4-20RM[6][7]-M5	
	ø6	5	M5×0.8	VPLFD6-5R[6][7]-M5	M4
		10	M5×0.8	VPLFD6-10R[6][7]-M5	
		15	M5×0.8	VPLFD6-15R[6][7]-M5	
		20	M5×0.8	VPLFD6-20R[6][7]-M5	
	ø8	5	M5×0.8	VPLFD8-5R[6][7]-M5	
		10	M5×0.8	VPLFD8-10R[6][7]-M5	
		15	M5×0.8	VPLFD8-15R[6][7]-M5	
		20	M5×0.8	VPLFD8-20R[6][7]-M5	
	ø10	5	M5×0.8	VPLFD10-5R[6][7]-M5	
		10	M5×0.8	VPLFD10-10R[6][7]-M5	
		15	M5×0.8	VPLFD10-15R[6][7]-M5	
		20	M5×0.8	VPLFD10-20R[6][7]-M5	
	ø15	5	M5×0.8	VPLFD15-5R(A)[6][7]-M5	M6
		10	M5×0.8	VPLFD15-10R(A)[6][7]-M5	
		15	M5×0.8	VPLFD15-15R(A)[6][7]-M5	
		20	M5×0.8	VPLFD15-20R(A)[6][7]-M5	
	ø20	5	M6×1	VPLFD20-5R(A)[6][7]-M6	
		10	M6×1	VPLFD20-10R(A)[6][7]-M6	
		15	M6×1	VPLFD20-15R(A)[6][7]-M6	
		20	M6×1	VPLFD20-20R(A)[6][7]-M6	
	ø25	5	M6×1	VPLFD25-5R(A)[6][7]-M6	
		10	M6×1	VPLFD25-10R(A)[6][7]-M6	
		15	M6×1	VPLFD25-15R(A)[6][7]-M6	
		20	M6×1	VPLFD25-20R(A)[6][7]-M6	
	ø30	5	M6×1	VPLFD30-5R(A)[6][7]-M6	
		10	M6×1	VPLFD30-10R(A)[6][7]-M6	
		15	M6×1	VPLFD30-15R(A)[6][7]-M6	
		20	M6×1	VPLFD30-20R(A)[6][7]-M6	
	ø40	5	M6×1	VPLFD40-5R(A)[6][7]-M6	
		10	M6×1	VPLFD40-10R(A)[6][7]-M6	
		15	M6×1	VPLFD40-15R(A)[6][7]-M6	
		20	M6×1	VPLFD40-20R(A)[6][7]-M6	
	ø50	5	M6×1	VPLFD50-5R(A)[6][7]-M6	
		10	M6×1	VPLFD50-10R(A)[6][7]-M6	
		15	M6×1	VPLFD50-15R(A)[6][7]-M6	
		20	M6×1	VPLFD50-20R(A)[6][7]-M6	

RoHS2 (2011/65/EU+EU2015/863) compliant

Holder type	Pad dia. (mm)	Female thread size	Model code	13 -S3 -S3 spec.	Connection config. code
Fixed type, Direct mount, Mini VPME 	ø0.7	M3×0.5	VPME0.7RM[6][7]-M313	○	T4
	ø1	M3×0.5	VPME1RM[6][7]-M313	○	
	ø1.5	M3×0.5	VPME1.5RM[6][7]-M313	○	
	ø2	M3×0.5	VPME2RM[6][7]-M313	○	
	ø3	M3×0.5	VPME3RM[6][7]-M313	○	T8
	ø4	M3×0.5	VPME4RM[6][7]-M313	○	
	ø6	M5×0.8	VPME6R[6][7]-M513	○	
	ø8	M5×0.8	VPME8R[6][7]-M513	○	
Holder type	Pad dia. (mm)	Female thread size	Model code	13 -S3 -S3 spec.	Connection config. code
Fixed type, Direct mount, Standard VPE 	ø1	M3×0.5	VPE1R[6]-M313	○	H3
	ø2	M3×0.5	VPE2R[6]-M313	○	
	ø3	M3×0.5	VPE3R[6]-M313	○	
	ø4	M3×0.5	VPE4R[6]-M313	○	T8
	ø6	M5×0.8	VPE6R[6][7]-M513	○	
	ø8	M5×0.8	VPE8R[6][7]-M513	○	

VPE holders are available with metric male/female threads, taper pipe threads, parallel pipe threads, and NPT threads. See Pad holder only (page 399) for variations.

*Pads with the same configuration code as the holder can be connected. [See the Pad rubber only (page 376)].

Applicable Screws Metric male thread: M3, M5, M8, M10, M12, M14 Taper pipe thread: R1/8, R1/4, R3/8, R1/2 NPT thread: NPT1/8, NPT1/4, NPT3/8, NPT1/2
Metric female thread: M5, M8 Parallel pipe thread: G1/8, G1/4, G3/8, G1/2

Holder type	Pad dia. (mm)	Female thread size	Model code	13 -S3 -S3 spec.	Connection config. code
Spring type, Direct mount VPF 	ø1	M10×1	VPF1R[6][9][13]	○	H3
	ø2	M10×1	VPF2R[6][9][13]	○	
	ø3	M10×1	VPF3R[6][9][13]	○	
	ø4	M10×1	VPF4R[6][9][13]	○	
	ø6	M10×1	VPF6R[6][7][13]	○	T8
	ø8	M10×1	VPF8R[6][7][13]	○	
	ø10	M14×1	VPF10R[6][7][9][13]	○	M4
	ø15	M14×1	VPF15R(A)[6][7][9][13]	○	
	ø20	M14×1	VPF20R(A)[6][7][9][13]	○	
	ø25	M14×1	VPF25R(A)[6][7][9][13]	○	
	ø30	M14×1	VPF30R(A)[6][7][9][13]	○	M6
	ø40	M14×1	VPF40R(A)[6][7][9][13]	○	
	ø50	M14×1	VPF50R(A)[6][7][9][13]	○	



Notes

*Deep type pad can be selected for the models with pad type code: R (A) in the model code.
Please select "R" for general type and "A" for deep type pad.



CAD data is available
at PISCO website.



Packaging specifications
1 pc./bag



Options

[7]: Surface treatment (Fiber surface, DLC. coating, Reformed surface, and Fluoro-coating)

[9]: -DC ⇒ Holder with dust catcher

[13]: -S3 ⇒ -S3 spec. (○ in the lists: Available)

*1. For *-S3 spec., the release ring color is dark blue, and the gasket material is FKM+SUS316.

*2. For inch size push-in fitting, the release ring color is white even for *-S3 spec.*

Optional items ⇒ P.442	Surface treatment 	Dust Catcher (VPF) 	Fall Prevention Valve 	Swivel Joint for vacuum pad 	Filter 
---------------------------	---	---	--	--	---

Optional items (○: Available)

[7] Pad surface treatment (Suction mark-free)

(Small)			(General, Deep)						
5 Surface treatment code			7 Surface treatment code					Connection config. code	
Pad dia. (mm)	-ER	-FG	Pad dia. (mm)	-NF	-SF	-DL	-ER		-FG
	Reformed surface	Fluoro- coating		Fiber surface Nylon	Silk	DLC coating	Reformed surface		Fluoro- coating
ø0.7	○	○	ø6	—	—	○	○	○	T8
ø1	○	○	ø8	—	—	○	○	○	
ø1.5	○	○	ø10	—	—	○	○	○	
ø2	○	○	ø15	●	●	●	●	●	M4
ø3	○	○	ø20	●	●	●	●	●	
ø4	○	○	ø25	●	●	●	●	●	
Material	N, NE	S, SE	ø30	●	●	●	●	●	M6
			ø40	●	●	●	●	●	
			ø50	●	●	●	●	●	
			ø60	●	●	—	●	●	M10
			ø80	●	●	—	—	●	
			ø100	—	—	—	—	●	
			ø150	—	—	—	—	○	M20
			ø200	—	—	—	—	○	
Material	S, F	S, F, SE	N, NE	S, SE					

*For ● in the table above, deep type of standard series is available.

[9] Dust Catcher: -DC

Optional	Connection config. code	-S3 spec.
Dust Catcher (-DC)	H3	○
	T8	○
Holder type	M4	○
VPSC	M6	○
VPC	M10	○
	M20	○
VPD		
VPF		

*1. VPSC holder is available only for configuration code: H3 and T8.

*2. Configuration code: M10 and M20 are not available for VPF holder.

Characteristics of Dust Catcher ▶ P.371

Characteristics of surface treatment ▶ P.370

[10] Fall Prevention Valve: -ECV

Optional	Connection config. code	Model code
Fall Prevention Valve (-ECV)	T4	ECVM3-FM3(*1) ECVM5-FM5(*2)
	H3	ECVM3-FM3(*3) ECVM5-FM5(*2)
	M4	ECVM4-FM4
	T8	ECVM5-FM5(*4)
	M6	ECVM6-FM6
	M10	ECVM10-FM10

*1. Limited to M3 threads of VPME holders.

*2. Limited to M5 threads of VPE holders.

*3. Limited to M3 threads of VPE holders.

*4. Limited to M5 threads of VPME and VPE holders.

Characteristics of Fall Prevention Valve ▶ P.722

[11] Swivel/swing joint: -FH, -FHH, -CFH

Optional	Swivel angle	Connection config. code	Model code
Ball Swivel Joint (-FH)(-FHH)	30° (-FH)	M4	FH10
		M6	FH20
		M10	FH60
	15° (-FHH)	M4	FH10-15
		M6	FH20-15
		M10	FH60-15
Flexible Swing Joint (-CFH)		M4	CFHM4-FM4
		T4	CFHM5-FM5(*2)
		H3	
		T8	
		M6	CFHM6-FM6

*1. When ordering a Flexible Swing Joint alone, please enter "-S3" at the end of the model code for -S3 specification.

*2. Limited to M5 threads of VPME (T8 only) and VPE holders.

Characteristics of Ball Swivel Joint ▶ P.724

Characteristics of Flexible Swing Joint ▶ P.725


[12] Filter: -F15, -F30

Optional	Filter area	Connection config. code	Model code
Pad Direct Mounting Filter (-F15)(-F30)	1.7cm ² (-F15)	M4	VFF15-M4
		M6	VFF15-M6
	7cm ² (-F30)	M6	VFF30-M6

Characteristics of Filter ▶ P.726


See the page 406 for the model designation including optional items.

Replacement parts (○: -S3 spec. is available)




Pad screw Model code	13 : -S3	Applicable pad dia. (mm)	Connection config. code
VPM46-613	○	ø10, ø15	M4
VPM610-813	○	ø20, ø25	M6
VPM612-1013	○	ø30	M6
VPM610-1513	○	ø40, ø50	M10
VPM1018 *		ø60-ø100	M10
VPM2028 *		ø150, ø200	M20


Pad screws marked with () do not contain copper-based metallic materials in flow paths.



Plain washer Model code	Applicable pad dia. (mm)	Connection config. code
HW8.4×15.5×1.6	ø20-ø30	M6
HW8.5×22×1.6	ø40, ø50	M6
HW17×32×2.6	ø60	M10
HW10.5×22×1.6	ø80, ø100	M10
HW21×34×3	ø150, ø200	M20



Pad support Model code	Applicable pad dia. (mm)	Connection config. code
VPW40	ø40	M6
VPW50	ø50	M6
VPW60	ø60	M10

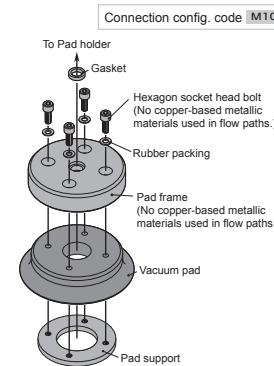

*Be sure to replace a rubber packing when removing a Hexagon socket head bolt.

Gasket Model code	Applicable pad dia. (mm)
SG10	ø80, ø100


Pad frame Model code	Applicable pad dia. (mm)
VPH80R	ø80
VPH100R	ø100

Hexagon socket head bolt Model code	Applicable pad dia. (mm)
VPH80CS-SET	ø80
VPH100CS-SET	ø100

Rubber packing Model code	13 : -S3	Applicable pad dia. (mm)
VPH80P13-SET	○	ø80
VPH100P13-SET	○	ø100

*Hexagon socket head bolt and Rubber packing: 4 pcs/set.

Pad support Model code	Applicable pad dia. (mm)
VPW80R	ø80
VPW100R	ø100

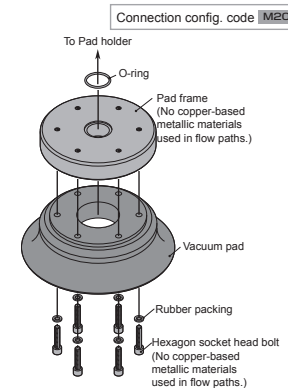

*Be sure to replace a rubber packing when removing a Hexagon socket head bolt.

O-ring model code	13 : -S3	Applicable pad dia. (mm)
22×1.513	○	ø150, ø200


Pad frame Model code	Applicable pad dia. (mm)
VPH150R	ø150, ø200

Hexagon socket head bolt Model code	Applicable pad dia. (mm)
VPH150CS-SET	ø150
VPH200CS-SET	ø200

Rubber packing Model code	13 : -S3	Applicable pad dia. (mm)
VPH150P13-SET	○	ø150, ø200

*Hexagon socket head bolt and Rubber packing: 6 pcs/set.


Rearrangement parts (○: -S3 spec. is available)

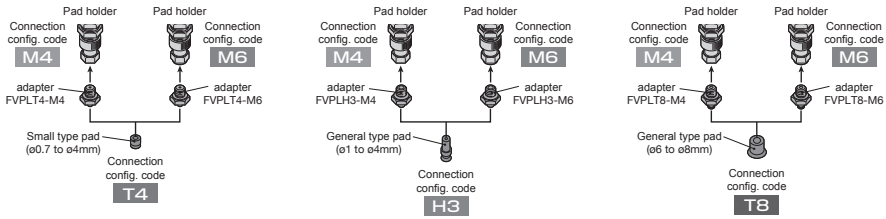

Model code of Adapter for pad connection type conversion	○: -S3	Applicable pad dia. (mm)	Connection config. code	
			Before	After
FVPLT4-M4	○	ø0.7 to ø4 (Small)	T4	M4
FVPLT4-M6	○	ø0.7 to ø4 (Small)		M6
FVPLH3-M4	○	ø1 to ø4 (General)	H3	M4
FVPLH3-M6	○	ø1 to ø4 (General)		M6
FVPLT8-M4	○	ø6 , ø8 (General)	T8	M4
FVPLT8-M6	○	ø6 , ø8 (General)		M6

*1. These adapters are used to mount 0.7 to 8 mm dia. Standard pads on a holder with M4 or M6 configuration code.

*2. Gasket for adapter is equipped with an Adapter.



Model code of Adapter for pad connection type conversion	○: -S3	Applicable pad dia. (mm)	Connection config. code	
			Before	After
FVPL-FM4-M6	○	ø10, ø15(General) ø15(Deep)	M4	M6

*1. These adapters are used to mount a pad & screw set with M4 configuration code on a pad holder with M6 configuration code.


*2. Gasket for adapter is equipped with an Adapter.

To M5 thread holder or a device



Pad screw Model code	○: -S3	Applicable pad dia. (mm)
VPMS6-7	○	ø10, ø15
VPMS10-8	○	ø20, ø25
VPMS12-9	○	ø30
VPMS10-13	○	ø40, ø50

Model Designation (Example)



(1) Vacuum Pad

(2) Pad size (3) Pad type (6) Connection configuration code *Required for Pad & screw set only. (○: Available)

Pad type or application	Small	General	Deep	Bellows	Multi-bellows	Metal detectable	Skidproof	Flat (Large suction flow type)	Mark-free	Soft	Soft bellows	Sponge	Ultrathin	For packaging bag	Pad type or application
Code	RM	R	A	B	W	BE, BD	K	F, FH	Q	L	LB	S	P	PB	Code
0.7	○	○	○	○	○	○	○	○	○	○	○	○	○	○	2x4
1	○	○	○	○	○	○	○	○	○	○	○	○	○	○	3.5x7
1.5	○	○	○	○	○	○	○	○	○	○	○	○	○	○	4x10
2	○	○	○	○	○	○	○	○	○	○	○	○	○	○	5x10
3	○	○	○	○	○	○	○	○	○	○	○	○	○	○	6x10
4	○	○	○	○	○	○	○	○	○	○	○	○	○	○	4x20
6	○	○	○	○	○	○	○	○	○	○	○	○	○	○	4x30
8	○	○	○	○	○	○	○	○	○	○	○	○	○	○	5x30
10	○	○	○	○	○	○	○	○	○	○	○	○	○	○	6x30
15	○	○	○	○	○	○	○	○	○	○	○	○	○	○	8x20
20	○	○	○	○	○	○	○	○	○	○	○	○	○	○	8x30
25	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
30	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
35	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
40	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
50	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
60	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
70	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
80	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
100	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
150	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
200	○	○	○	○	○	○	○	○	○	○	○	○	○	○	

(4) Pad material (○: Available)

Code	N	S	U	F	SE	NE	G	HN	EP	FS	NH	YS2	YS4	MSF3	MSF5	MSS3	MSS5
Rubber material	Nitrile	Silicone	Urethane	Fluoro	Conductive silicone	Conductive NBR (Low resistance)	Food Sanit. Act compliant NBR	HNBR	EPDM	Fluoro-silicone	Oil proof NBR	Extra soft silicone	Iron powder type	SUS powder type	Metal detectable silicone		
Pad color	Black	Clear white	Dark blue	Gray	Black	Black	Light gray	Black	Black	Red-orange	Black	Pink	Blue	Reddish-brown	Dark-green	Brown	Green
Material code marking ¹⁾	None	None	None	None	SE	NE	None	HN	EP	None	None	None	None	SF	SF	SS	SS
Standard	General	Deep	Small	RM	○	○	○	○	○	○	○	○	○	○	○	○	○
Soft	L	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Soft bellows	LB	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Skidproof	K	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Bellows	B	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Multi-bellows	W	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
For packaging bag	PB	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Metal Detectable	BE	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Ribs (Bellows with bumps)	BD	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Ultrathin	P	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Flat	F	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Flat large suction flow	FH	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Oval	E	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

● Mark-free type (Pad type code: Q)

Code	K	M	KE
Resin material	PEEK	POM	Conductive PEEK
Pad color	Beige	White	Black

● Sponge type (Pad type code: S)

Code	S	C
Rubber material	Silicone	Chloroprene
Pad color	Dark-orange	Black

*1. For vacuum pads in black color (SE: Conductive silicone, NE: Conductive NBR (low resistance), HN: HNBR and EP: EPDM) and Vacuum pad Metal Detectable type, the pad material code is marked on the top or the side of the vacuum pad for material identification. (The marking on black vacuum pads has started since Oct. 2023 gradually.)



(5) Surface treatment (Optional) (○: Available)

Code			No code	-NF	-SF	-DL	-ER	-FG
Surface treatment			None	Fiber surface		DLC. coating	Reformed surface	Fluoro-coating
				Nylon fiber	Silk fiber			
			—					
Applicable pad material			—	Silicone (S) Fluoro (F)	Silicone (S) Fluoro (F)	Silicone (S) Fluoro (F) Conductive silicone (SE)	Nitrile (N) Conductive NBR (NE)	Silicone (S) Conductive silicone (SE) Extra soft silicone (YS2, YS4)
Pad type	Standard	General	R	—	○	○	○	○
		Deep	A	—	○	○	○	○
		Small	RM	—	—	—	○	○
	Soft		L	—	○	○	○	○
	Soft bellows		LB	—	○	○	○	○
	Skidproof		K	—	—	—	—	—
	Bellows		B	—	○	○	○	○
	Multi-bellows		W	—	—	○	○	○
	For packaging bag		PB	—	—	—	—	○
	Metal Detectable		BE, BD	—	—	—	—	—
	Ultrathin		P	—	—	—	○	○
	Flat		F	—	—	—	○	○
	Flat large suction flow		FH	—	—	—	○	○
Mark-free		Q	—	—	—	—	—	
Sponge		S	—	—	—	—	—	
Oval		E	—	—	—	○	○	

*Some surface treatments are not available depending on pad size.

Please refer to page 370 for the details of each pad surface type and treatment for Suction Mark-free.


(6) Connection configuration code (Required for Pad & screw set only.) Please refer to the Pad size and type list on the 374 page.

Code	No code	-M4	-M6	-M10	-M20	-M5 ^(*)
Connection config. code	—	M4	M6	M10	M20	—
Thread size	Pad rubber only	M4×0.7	M6×1	M10×1.5	M20×2	M5×0.8

*M5 thread is used for mounting on non-PISCO holders. Contact us for the price of screw set.

(7) Mark-free resin attachment material (Bellows type only) (Optional)

Code	No code	-QK	-QM	-QKE
Resin material	—	PEEK	POM	Conductive PEEK (Volume resistance: 10 ¹² to 10 ¹⁵ Ω·cm)
	—			



*1. Selectable for Bellows type pad dia. 10 to 30 mm.

*2. Resin attachment cannot be installed when selecting surface treatment.

*3. Resin attachment cannot be installed when selecting Extra soft silicone for pad material.

(8) -S3 spec. (Required for Pad & screw set only) (Optional)

Code	No code	-S3
Metal material	Standard	No copper-based metallic materials used in flow paths

Vacuum pad / Pad & screw set

Holders with the same "connection configuration code" (M4, M6 etc.) can be connected. For connectable holders, please see the page of Pad holder only (page 384-).

Flat series, Pad rubber alone										Flat series, Pad & screw set									
○: Available as standard item										○: Available as standard item									
Model code	④ Pad rubber material						Connection config. code	Model code	④ Pad rubber material						Connection config. code				
	N	S	U	F	SE	NE			N	S	U	F	SE	NE		-S3			
	Nitrile	Silicone	Urethane	Fluoro	Conductive silicone	Conductive NBR (Low resistance)			Nitrile	Silicone	Urethane	Fluoro	Conductive silicone	Conductive NBR (Low resistance)		-S3 spec.			
VP10F④⑤	○	○	○	○	○	○	M4⑧⑨	VP10F④⑤-M4⑧	○	○	○	○	○	○	○	M4			
VP15F④⑤	○	○	○	○	○	○		VP15F④⑤-M4⑧	○	○	○	○	○	○	○				
VP20F④⑤	○	○	○	○	○	○	M6⑧⑨	VP20F④⑤-M6⑧	○	○	○	○	○	○	○	M6			
VP25F④⑤	○	○	○	○	○	○		VP25F④⑤-M6⑧	○	○	○	○	○	○	○				
VP30F④⑤	○	○	○	○	○	○		VP30F④⑤-M6⑧	○	○	○	○	○	○	○				

 Flat large suction flow series, Pad rubber alone							 Flat large suction flow series, Pad & screw set							
○: Available as standard item							○: Available as standard item							
Model code	④ Pad rubber material					Connection config. code	Model code	④ Pad rubber material					Connection config. code	
	N	S	F	SE	NE			N	S	F	SE	NE		⑤
	Nitrile	Silicone	Fluoro	Conductive silicone	Conductive NBR (Low resistance)			Nitrile	Silicone	Fluoro	Conductive silicone	Conductive NBR (Low resistance)		-S3 spec.
VP10FH④⑤	○	○	○	○	○	M4⑧	VP10FH④⑤-M4⑧	○	○	○	○	○	○	M4
VP15FH④⑤	○	○	○	○	○		VP15FH④⑤-M4⑧	○	○	○	○	○	○	
VP20FH④⑤	○	○	○	○	○	M6⑧	VP20FH④⑤-M6⑧	○	○	○	○	○	○	M6
VP25FH④⑤	○	○	○	○	○		VP25FH④⑤-M6⑧	○	○	○	○	○	○	
VP30FH④⑤	○	○	○	○	○		VP30FH④⑤-M6⑧	○	○	○	○	○	○	





P.642

Mark-free series,
Resin pad alone





P.642

Mark-free series,
with Flexible Swing Joint

Model code	○: Available as standard item			Connection config. code	Model code	○: Available as standard item			Connection config. code	
	④ Pad rubber material					④ Pad rubber material				
	K	M	KE			K	M	KE		
	PEEK	POM	Conductive PEEK			PEEK	POM	Conductive PEEK		
VP10Q④	○	○	○	M4①	VP10Q④-M4⑧	○	○	○	○	M4
VP20Q④	○	○	○	M6①	VP20Q④-M6⑧	○	○	○	○	M6
VP30Q④	○	○	○		VP30Q④-M6⑧	○	○	○	○	



Sponge series, Pad rubber alone

P.656



Sponge series, Pad & screw set

P.656

○: Available as standard item ④ Pad rubber material C S Chloroprene Silicone				Connection config. code	○: Available as standard item ④ Pad rubber material ⑧ C S -S3 Chloroprene Silicone -S3 spec.				Connection config. code
Model code					Model code				
VP10S④		○	○		VP10S④-M6⑧	○	○	○	
VP15S④		○	○		VP15S④-M6⑧	○	○	○	
VP20S④		○	○		VP20S④-M6⑧	○	○	○	
VP25S④		○	○	M8④	VP25S④-M6⑧	○	○	○	M8
VP30S④		○	○		VP30S④-M6⑧	○	○	○	
VP35S④		○	○		VP35S④-M6⑧	○	○	○	
VP50S④		○	○		VP50S④-M6⑧	○	○	○	
VP70S④		○	○		VP70S④-M10	○	○	○	(*)
VP100S④		○	○	M10④	VP100S④-M10	○	○	○	(*)

- Notes**
- *1. A pad screw is required to mount on the holder. If you do not have a pad screw, please select from the Pad & screw set.
- *2. A Flexible Swing Joint is required to mount on the holder. If you do not have a Flexible Swing Joint, please select from the Mark-free series, with Flexible Swing Joint set.
- *3. For Pad & screw set of Sponge series 70 mm and 100 mm pad dia., the standard spec. is equivalent to "-S3" spec.

CAD data is available at PISCO website.

Packaging specifications 1 pc./bag

Options
⑤ : Surface treatment
⑧ : -S3 ⇒ -S3 spec.

Holders with the same "connection configuration code" (E10, E20 etc.) can be connected. For connectable holders, please see the page of Pad holder only (page 384-).

Oval series, Pad rubber alone												
Model code	○: Available as standard item											
	④ Pad rubber material											
	N	S	U	F	SE	NE	HN	EP				
VP2×4E④⑤	○	○	○	○	○	○	○	○				
VP3.5×7E④⑤	○	○	○	○	○	○	○	○				
VP4×10E④⑤	○	○	○	○	○	○	○	○				
VP4×20E④⑤	○	○	○	○	○	○	○	○				
VP4×30E④⑤	○	○	○	○	○	○	○	○				
VP5×10E④⑤	○	○	○	○	○	○	○	○				
VP5×20E④⑤	○	○	○	○	○	○	○	○				
VP5×30E④⑤	○	○	○	○	○	○	○	○				
VP6×10E④⑤	○	○	○	○	○	○	○	○				
VP6×20E④⑤	○	○	○	○	○	○	○	○				
VP6×30E④⑤	○	○	○	○	○	○	○	○				
VP8×20E④⑤	○	○	○	○	○	○	○	○				
VP8×30E④⑤	○	○	○	○	○	○	○	○				

Oval series, Pad & screw set												
Model code	○: Available as standard item											
	④ Pad rubber material											
	N	S	U	F	SE	NE	HN	EP	-S3			
VP2×4E④⑤-M6⑧	○	○	○	○	○	○	○	○	○			
VP3.5×7E④⑤-M6⑧	○	○	○	○	○	○	○	○	○			
VP4×10E④⑤-M6⑧	○	○	○	○	○	○	○	○	○			
VP4×20E④⑤-M6⑧	○	○	○	○	○	○	○	○	○			
VP4×30E④⑤-M6⑧	○	○	○	○	○	○	○	○	○			
VP5×10E④⑤-M6⑧	○	○	○	○	○	○	○	○	○			
VP5×20E④⑤-M6⑧	○	○	○	○	○	○	○	○	○			
VP5×30E④⑤-M6⑧	○	○	○	○	○	○	○	○	○			
VP6×10E④⑤-M6⑧	○	○	○	○	○	○	○	○	○			
VP6×20E④⑤-M6⑧	○	○	○	○	○	○	○	○	○			
VP6×30E④⑤-M6⑧	○	○	○	○	○	○	○	○	○			
VP8×20E④⑤-M6⑧	○	○	○	○	○	○	○	○	○			
VP8×30E④⑤-M6⑧	○	○	○	○	○	○	○	○	○			


- Notes**
- *A pad screw is required to mount on the holder. If you do not have a pad screw, please select from the Pad & screw set.
- CAD data is available at PISCO website.
- Packaging specifications 1 pc./bag
- Options
⑤ : Surface treatment
⑧ : -S3 ⇒ -S3 spec.

Available pad size and material for surface treatment (Oval series)


Pad dia. (mm)	⑤ Surface treatment code		
	-DL	-ER	-FG
2×4	○	○	○
3.5×7	○	○	○
4×10	○	○	○
4×20	○	○	○
4×30	○	○	○
5×10	○	○	○
5×20	○	○	○
5×30	○	○	○
6×10	○	○	○
6×20	○	○	○
6×30	○	○	○
8×20	○	○	○
8×30	○	○	○
Material	S, F, SE	N, NE	S, SE

Vacuum Pad Configuration


Pad dia. : $\phi 0.7, \phi 1, \phi 1.5, \phi 2, \phi 3, \phi 4$ mm

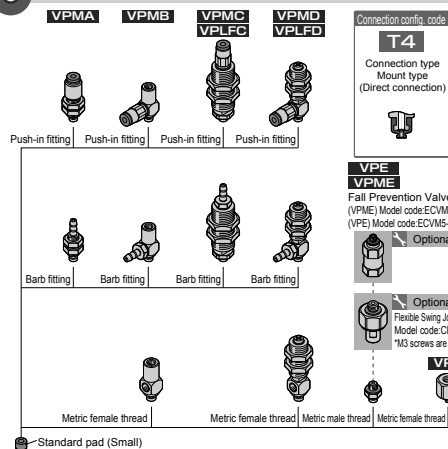



Pad dia. : $\phi 1, \phi 2, \phi 3, \phi 4$ mm

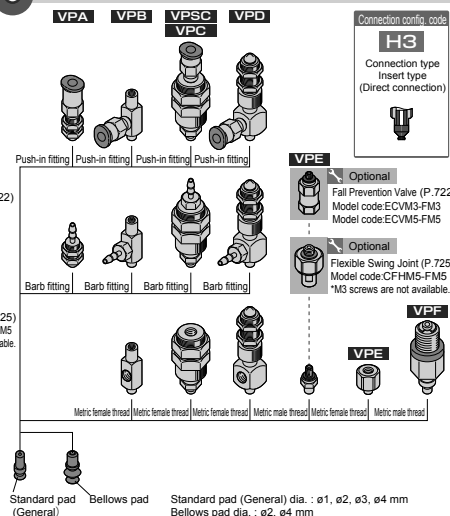

Pad dia. : $\phi 6, \phi 8, \phi 10, \phi 15, \phi 20$ mm



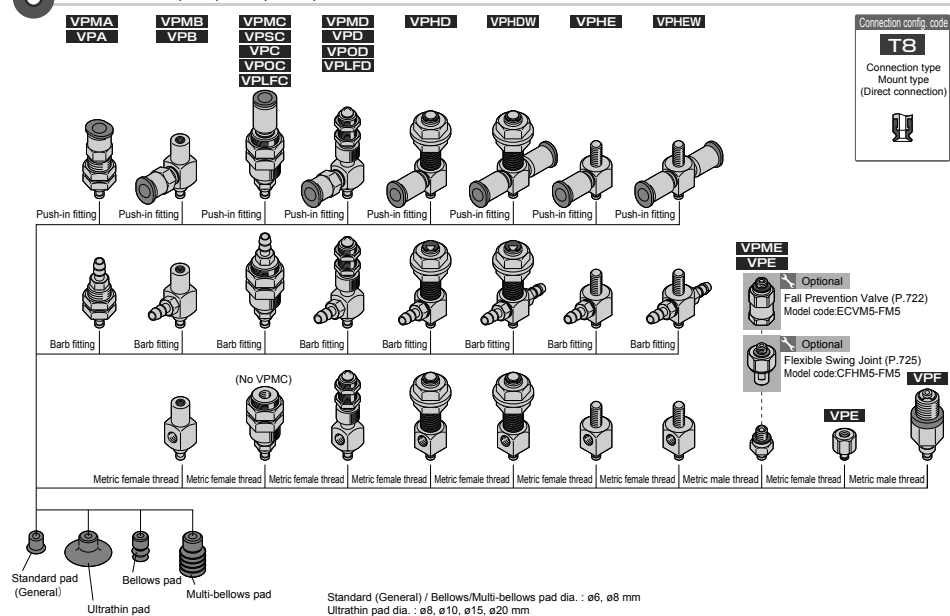


Pad dia. : $\phi 4, \phi 6, \phi 8, \phi 10, \phi 15$ mm


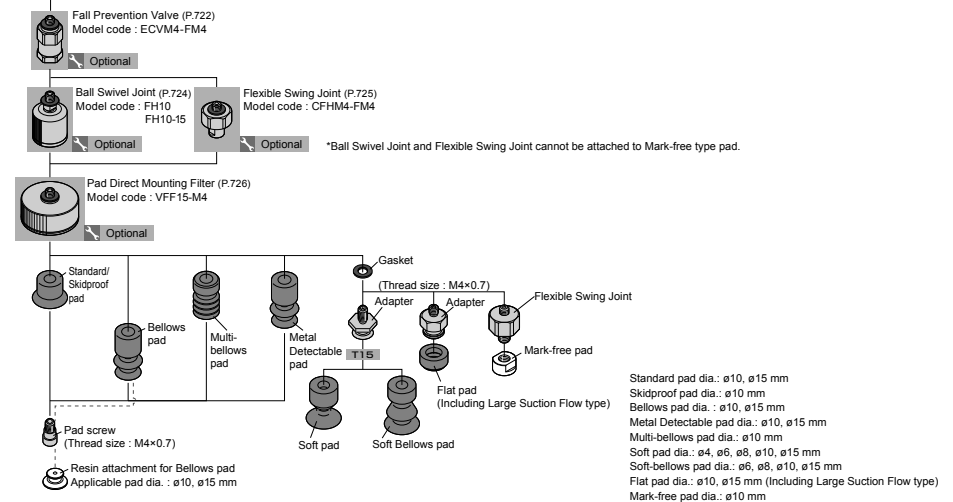
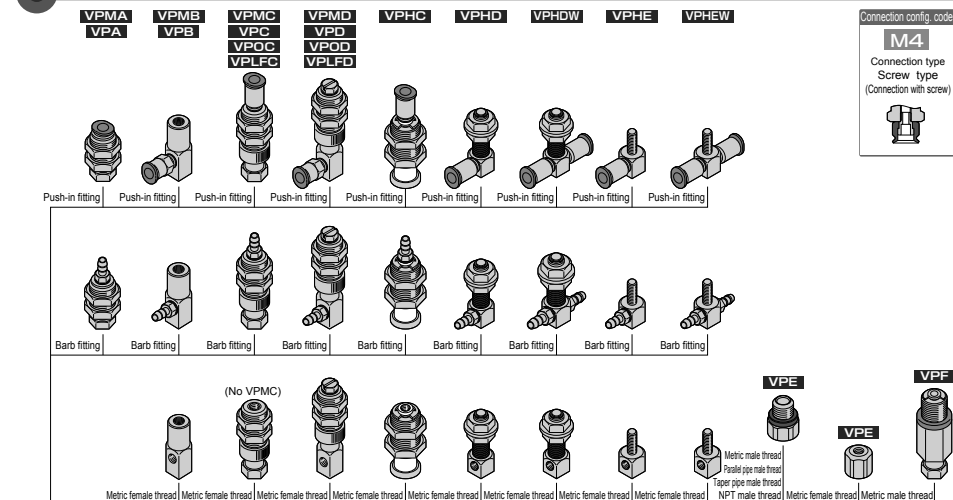


Vacuum Pad Configuration




Pad dia. : $\varnothing 10$, $\varnothing 15$, $\varnothing 20$, $\varnothing 25$, $\varnothing 30$, $\varnothing 35$, $\varnothing 40$, $\varnothing 50$ mm

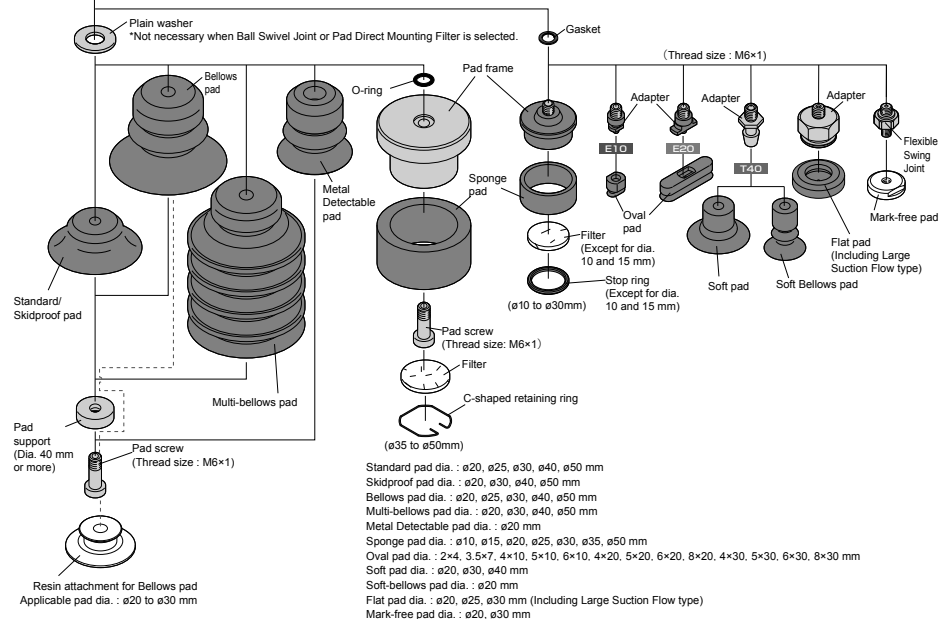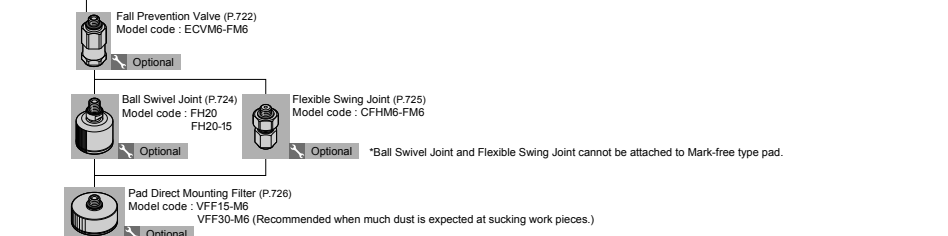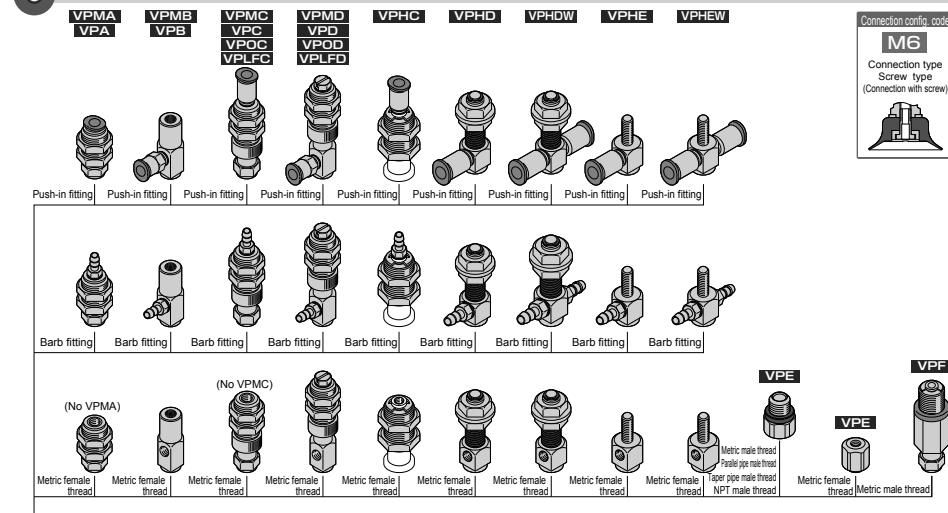

Pad dia. : $\varnothing 60$, $\varnothing 70$, $\varnothing 80$, $\varnothing 100$ mm

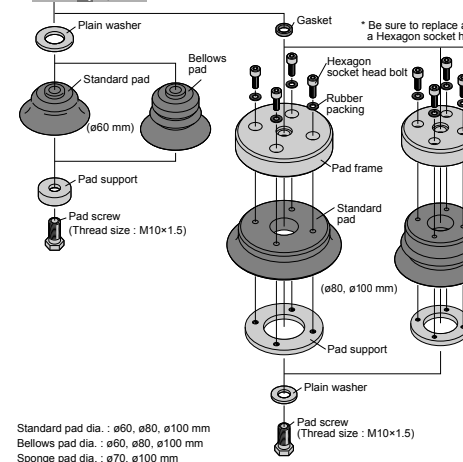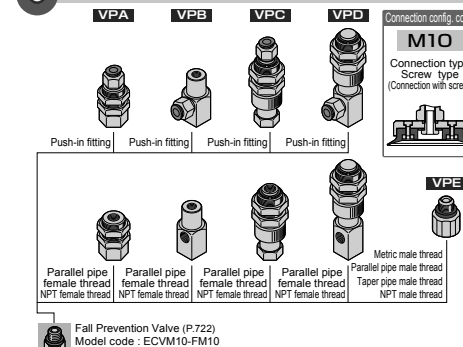

Pad dia. : $\varnothing 150$, $\varnothing 200$ mm

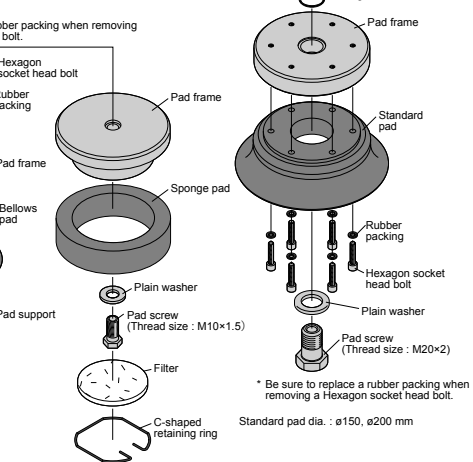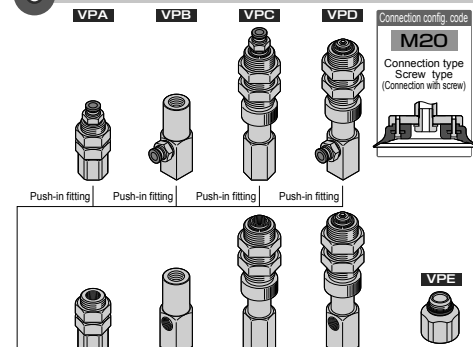

Vacuum Pad Configuration

Pad dia. : ø4, ø6, ø8, ø10, ø15 mm (Exclusive to Soft and Soft Bellows type)

VPHC

VPHD

VPHDW

VPHE

VPHEW

Push-in fitting

Push-in fitting

Push-in fitting

Push-in fitting

Push-in fitting

Barb fitting

Barb fitting

Barb fitting

Barb fitting

Barb fitting

Metric female thread

Metric female thread

Metric female thread

Metric female thread

Metric female thread

Metric male thread

Parallel pipe male thread

Taper pipe male thread

NPT male thread

Metric female thread

Soft pad

Soft Bellows pad

Soft pad dia. : ø4, ø6, ø8, ø10, ø15 mm

Soft-bellows pad dia. : ø6, ø8, ø10, ø15 mm

Connection config. code

T15

Connection type

Mount type

(Direct connection)

Pad dia. : ø20, ø30, ø40 mm (Exclusive to Soft and Soft Bellows type)

VPHC

VPHD

VPHDW

VPHE

VPHEW

Push-in fitting

Push-in fitting

Push-in fitting

Push-in fitting

Push-in fitting

Barb fitting

Barb fitting

Barb fitting

Barb fitting

Barb fitting

Metric female thread

Metric female thread

Metric female thread

Metric female thread

Metric female thread

Metric male thread

Parallel pipe male thread

Taper pipe male thread

NPT male thread

Metric female thread

Soft pad

Soft Bellows pad

Soft pad dia. : ø20, ø30, ø40 mm

Soft-bellows pad dia. : ø20 mm

Connection config. code

T40

Connection type

Mount type

(Direct connection)

Pad dia. : ø20, ø25 mm (Exclusive to Vacuum pad for packaging bag)

VPA

VPE

Push-in fitting

Metric male thread

Parallel pipe male thread

Packaging bag pad 3 convolutions

Packaging bag pad 5 convolutions

Over-suction preventing adapter Spherical type

Over-suction preventing adapter Plane type

With stainless steel mesh

Connection config. code

PB8

Connection type

Mount type

(Direct connection)

Pad dia. : ø30, ø40, ø50 mm (Exclusive to Vacuum pad for packaging bag)

VPA

VPE

Push-in fitting

Metric male thread

Parallel pipe male thread

Packaging bag pad 3 convolutions

Packaging bag pad 5 convolutions

Over-suction preventing adapter Spherical type

Over-suction preventing adapter Plane type

With stainless steel mesh

Connection config. code

PB15

Connection type

Mount type

(Direct connection)

Pad size : 2×4, 3.5×7, 4 to 6×10 mm (Exclusive to Oval type)

VPAE

VPBE

Push-in fitting

Push-in fitting

Barb fitting

Barb fitting

Metric female thread

Metric female thread

Oval pad

Connection config. code

E10

Connection type

Mount type

(Direct connection)

Pad size : 4 to 8×20 mm, 4 to 8×30 mm (Exclusive to Oval type)

VPAE

VPBE

Push-in fitting

Push-in fitting

Barb fitting

Barb fitting

Metric female thread

Metric female thread

Oval pad

Connection config. code

E20

Connection type

Mount type

(Direct connection)